





防水连接器 WATERPROOF CONNECTORS





		名称 (Name):	8P连接器
		编码 (Code):	JHB00280(776280-1)
		金属 (Metal):	黄铜电镀锡镍(Brass Tin)
		极数 (Poles):	8* Φ1.3mm
		原料 (Material):	PBT GF/UL-94 V0
		温度范围 (Temperature):	-40° - 125°
		间距 (Pitch):	4.0mm
		额定电流 (Current Rating):	10A - 15A
		绝缘电阻 (Insulation Resistance):	100MΩ 最小值
接触电阻 (Contact Rresistance) :		5mΩ (最初)	
32.1*40.8*37.8mm			


		名称 (Name):	14P连接器
		编码 (Code):	JHB00281(776267-1)
		金属 (Metal):	黄铜电镀镍锡(Brass Tin)
		极数 (Poles):	14* Φ1.3mm
		原料 (Material):	PBT GF/UL-94 V0
		温度范围 (Temperature):	-40° - 125°
		间距 (Pitch):	4.0mm
		额定电流 (Current Rating):	10A - 15A
		绝缘电阻 (Insulation Resistance):	100MΩ 最小值
		接触电阻 (Contact Resistance):	5mΩ (最初)
32.1*48.9*37.8mm			


		名称 (Name):	23P连接器
		编码 (Code):	JHB00282(776087-1)
		金属 (Metal):	黄铜电镀镍锡(Brass Tin)
		极数 (Poles):	23*Φ1.3mm
		原料 (Material):	PBT GF/UL-94 V0
		温度范围 (Temperature):	-40° - 125°
		间距 (Pitch):	4.0mm
		额定电流 (Current Rating):	10A - 15A
		绝缘电阻 (Insulation Resistance):	100MΩ 最小值
		接触电阻 (Contact Rresistance) :	5mΩ (最初)
32.1*60.9*37.8mm			


		名称 (Name):	23P连接器 (反向折弯带螺母)
		编码 (Code):	JHB00513
		金属 (Metal):	黄铜电镀镍锡(Brass Tin)
		极数 (Poles):	23*Φ1.3mm
		原料 (Material):	PBT GF/UL-94 V0
		温度范围 (Temperature):	-40° - 125°
		间距 (Pitch):	4.0mm
		额定电流 (Current Rating):	10A - 15A
		绝缘电阻 (Insulation Resistance):	100MΩ 最小值
		接触电阻 (Contact Rresistance) :	5mΩ (最初)
		32.1*60.9*37.8mm	

		名称 (Name):	35P连接器
		编码 (Code):	JHB00283(776163-1)
		金属 (Metal):	黄铜电镀镍锡(Brass Tin)
		极数 (Poles):	35*Φ1.3mm
		原料 (Material):	PBT GF/UL-94 V0
		温度范围 (Temperature):	-40° - 125°
		间距 (Pitch):	4.0mm
		额定电流 (Current Rating):	10A - 15A
		绝缘电阻 (Insulation Resistance):	100MΩ 最小值
		接触电阻 (Contact Rresistance) :	5mΩ (最初)
32.1*76.9*37.8mm			


		名称 (Name):	8P连接器(白)
		编码 (Code):	JHB00413(776280-2)
		金属 (Metal):	黄铜电镀镍锡(Brass Tin)
		极数 (Poles):	8* Φ1.3mm
		原料 (Material):	PBT GF/UL-94 V0
		温度范围 (Temperature):	-40° - 125°
		间距 (Pitch):	4.0mm
		额定电流 (Current Rating):	10A - 15A
		绝缘电阻 (Insulation Resistance):	100MΩ 最小值
		接触电阻 (Contact Rresistance) :	5mΩ (最初)
		32.1*40.8*37.8mm	

		名称 (Name):	14P连接器(白)
		编码 (Code):	JHB00414(776267-2)
		金属 (Metal):	黄铜电镀镍锡(Brass Tin)
		极数 (Poles):	14* Φ1.3mm
		原料 (Material):	PBT GF/UL-94 V0
		温度范围 (Temperature):	-40° - 125°
		间距 (Pitch):	4.0mm
		额定电流 (Current Rating):	10A - 15A
		绝缘电阻 (Insulation Resistance):	100MΩ 最小值
		接触电阻 (Contact Resistance):	5mΩ (最初)
32.1*48.9*37.8mm			



		名称 (Name):	23P连接器(白)
		编码 (Code):	JHB00415(776087-2)
		金属 (Metal):	黄铜电镀镍锡(Brass Tin)
		极数 (Poles):	23*Φ1.3mm
		原料 (Material):	PBT GF/UL-94 V0
		温度范围 (Temperature):	-40° - 125°
		间距 (Pitch):	4.0mm
		额定电流 (Current Rating):	10A - 15A
		绝缘电阻 (Insulation Resistance):	100MΩ 最小值
		接触电阻 (Contact Rresistance) :	5mΩ (最初)
32.1*60.9*37.8mm			




名称 (Name):	35P连接器(白)
编码 (Code):	JHB00416(776163-2)
金属 (Metal):	黄铜电镀锡镍(Brass Tin)
极数 (Poles):	35*Φ1.3mm
原料 (Material):	PBT GF/UL-94 V0
温度范围 (Temperature):	-40° - 125°
间距 (Pitch):	4.0mm
额定电流 (Current Rating):	10A - 15A
绝缘电阻 (Insulation Resistance):	100MΩ 最小值
接触电阻 (Contact Resistance) :	5mΩ (最初)




名称 (Name):	8P连接器
编码 (Code):	JHB00362(776276-1)
金属 (Metal):	黄铜电镀镍锡(Brass Tin)
极数 (Poles):	8* Φ1.3mm
原料 (Material):	PBT GF/UL-94 V0
温度范围 (Temperature):	-40° - 125°
间距 (Pitch):	4.0mm
额定电流 (Current Rating):	10A - 15A
绝缘电阻 (Insulation Resistance):	100MΩ 最小值
接触电阻 (Contact Resistance) :	5mΩ (最初)

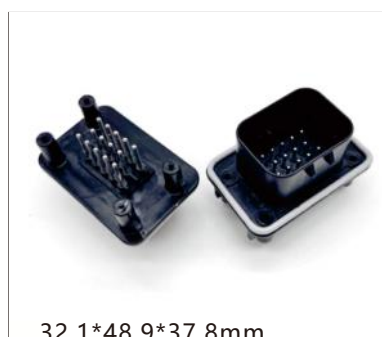


名称 (Name):	14P连接器
编码 (Code):	JHB00363(776262-1)
金属 (Metal):	黄铜电镀镍锡(Brass Tin)
极数 (Poles):	14* Φ1.3mm
原料 (Material):	PBT GF/UL-94 V0
温度范围 (Temperature):	-40° - 125°
间距 (Pitch):	4.0mm
额定电流 (Current Rating):	10A - 15A
绝缘电阻 (Insulation Resistance):	100MΩ 最小值
接触电阻 (Contact Resistance) :	5mΩ (最初)




名称 (Name):	23P连接器
编码 (Code):	JHB00364(776228-1)
金属 (Metal):	黄铜电镀镍锡(Brass Tin)
极数 (Poles):	23*Φ1.3mm
原料 (Material):	PBT GF/UL-94 V0
温度范围 (Temperature):	-40° - 125°
间距 (Pitch):	4.0mm
额定电流 (Current Rating):	10A - 15A
绝缘电阻 (Insulation Resistance):	100MΩ 最小值
接触电阻 (Contact Resistance) :	5mΩ (最初)




名称 (Name):	35P连接器
编码 (Code):	JHB00365(776231-1)
金属 (Metal):	黄铜电镀镍锡(Brass Tin)
极数 (Poles):	35*Φ1.3mm
原料 (Material):	PBT GF/UL-94 V0
温度范围 (Temperature):	-40° - 125°
间距 (Pitch):	4.0mm
额定电流 (Current Rating):	10A - 15A
绝缘电阻 (Insulation Resistance):	100MΩ 最小值
接触电阻 (Contact Resistance) :	5mΩ (最初)




名称 (Name):	8P连接器(白)
编码 (Code):	JHB00409(776276-2)
金属 (Metal):	黄铜电镀镍锡(Brass Tin)
极数 (Poles):	8* Φ1.3mm
原料 (Material):	PBT GF/UL-94 V0
温度范围 (Temperature):	-40° - 125°
间距 (Pitch):	4.0mm
额定电流 (Current Rating):	10A - 15A
绝缘电阻 (Insulation Resistance):	100MΩ 最小值
接触电阻 (Contact Rresistance) :	5mΩ (最初)




名称 (Name):	14P连接器(白)
编码 (Code):	JHB00410(776262-2)
金属 (Metal):	黄铜电镀镍锡(Brass Tin)
极数 (Poles):	14* Φ 1.3mm
原料 (Material):	PBT GF/UL-94 V0
温度范围 (Temperature):	-40° - 125°
间距 (Pitch):	4.0mm
额定电流 (Current Rating):	10A - 15A
绝缘电阻 (Insulation Resistance):	100M Ω 最小值
接触电阻 (Contact Rresistance) :	5m Ω (最初)



名称 (Name):	23P连接器(白)
编码 (Code):	JHB00411(776228-2)
金属 (Metal):	黄铜电镀锡(Brass Tin)
极数 (Poles):	23*Φ1.3mm
原料 (Material):	PBT GF/UL-94 V0
温度范围 (Temperature):	-40° - 125°
间距 (Pitch):	4.0mm
额定电流 (Current Rating):	10A - 15A
绝缘电阻 (Insulation Resistance):	100MΩ 最小值
接触电阻 (Contact Resistance) :	5mΩ (最初)




名称 (Name):	35P连接器(白)
编码 (Code):	JHB00408(776231-2)
金属 (Metal):	黄铜电镀镍锡(Brass Tin)
极数 (Poles):	35*Φ1.3mm
原料 (Material):	PBT GF/UL-94 V0
温度范围 (Temperature):	-40° - 125°
间距 (Pitch):	4.0mm
额定电流 (Current Rating):	10A - 15A
绝缘电阻 (Insulation Resistance):	100MΩ 最小值
接触电阻 (Contact Resistance) :	5mΩ (最初)



名称 (Name):	14P连接器(蓝)
编码 (Code):	JHB00465(776262-5)
金属 (Metal):	黄铜电镀锡钎(Brass Tin)
极数 (Poles):	14* Φ1.3mm
原料 (Material):	PBT GF/UL-94 V0
温度范围 (Temperature):	-40° - 125°
间距 (Pitch):	4.0mm
额定电流 (Current Rating):	10A - 15A
绝缘电阻 (Insulation Resistance):	100MΩ 最小值
接触电阻 (Contact Rresistance) :	5mΩ (最初)



32.1*60.9*37.8mm




Technical drawing showing dimensions for a 23P connector: 24.0mm total width, 4.0mm pitch, 4.0mm contact width, 6.90mm contact pitch, 28.00mm total length, 4.0mm mounting hole diameter, 1.30mm mounting hole offset, 4.03mm mounting hole diameter, 3.4mm mounting hole offset.

名称 (Name):	23P连接器(蓝)
编码 (Code):	JHB00466(776228-5)
金属 (Metal):	黄铜电镀镍锡(Brass Tin)
极数 (Poles):	23*Φ1.3mm
原料 (Material):	PBT GF/UL-94 V0
温度范围 (Temperature):	-40° - 125°
间距 (Pitch):	4.0mm
额定电流 (Current Rating):	10A - 15A
绝缘电阻 (Insulation Resistance):	100MΩ 最小值
接触电阻 (Contact Rresistance) :	5mΩ (最初)



32.1*76.9*37.8mm




Technical drawing showing dimensions for a 35P connector: 57.8mm total width, 4.0mm pitch, 4.0mm contact width, 6.90mm contact pitch, 28.00mm total length, 4.0mm mounting hole diameter, 1.30mm mounting hole offset, 4.03mm mounting hole diameter, 3.4mm mounting hole offset.

名称 (Name):	35P连接器(蓝)
编码 (Code):	JHB00467(776231-5)
金属 (Metal):	黄铜电镀镍锡(Brass Tin)
极数 (Poles):	35*Φ1.3mm
原料 (Material):	PBT GF/UL-94 V0
温度范围 (Temperature):	-40° - 125°
间距 (Pitch):	4.0mm
额定电流 (Current Rating):	10A - 15A
绝缘电阻 (Insulation Resistance):	100MΩ 最小值
接触电阻 (Contact Rresistance) :	5mΩ (最初)



32.1*72.0*31.8mm




Technical drawing showing dimensions for a 4P connector: 38.40±0.2mm total width, 5.84mm pitch, 4.0mm contact width, 6.90mm contact pitch, 28.00mm total length, 4.0mm mounting hole diameter, 1.30mm mounting hole offset, 4.03mm mounting hole diameter, 3.4mm mounting hole offset.

名称 (Name):	4P连接器
编码 (Code):	JHB00343(19428-0011)
金属 (Metal):	黄铜电镀镍锡(Brass Tin)
极数 (Poles):	4* 1.5*0.8mm
原料 (Material):	PBT GF/UL-94 V0
温度范围 (Temperature):	-40° - 125°
间距 (Pitch):	5.84mm
额定电流 (Current Rating):	20A - 25A
绝缘电阻 (Insulation Resistance):	100MΩ 最小值
接触电阻 (Contact Rresistance) :	5mΩ (最初)



32.1*72.0*31.8mm




Technical drawing showing dimensions for a 10P connector: 54.61±0.2mm total width, 5.84mm pitch, 4.0mm contact width, 6.90mm contact pitch, 28.00mm total length, 4.0mm mounting hole diameter, 1.30mm mounting hole offset, 4.03mm mounting hole diameter, 3.4mm mounting hole offset.

名称 (Name):	10P连接器
编码 (Code):	JHB00473(19428-0014)
金属 (Metal):	黄铜电镀镍锡(Brass Tin)
极数 (Poles):	10* 1.5*0.8mm
原料 (Material):	PBT GF/UL-94 V0
温度范围 (Temperature):	-40° - 125°
间距 (Pitch):	5.84mm
额定电流 (Current Rating):	20A - 25A
绝缘电阻 (Insulation Resistance):	100MΩ 最小值
接触电阻 (Contact Rresistance) :	5mΩ (最初)



32.1*72.0*31.8mm




Technical drawing showing dimensions for a 12P connector: 60.96mm total width, 5.84mm pitch, 4.0mm contact width, 6.90mm contact pitch, 28.00mm total length, 4.0mm mounting hole diameter, 1.30mm mounting hole offset, 4.03mm mounting hole diameter, 3.4mm mounting hole offset.

名称 (Name):	12P连接器
编码 (Code):	JHB00474(19428-0015)
金属 (Metal):	黄铜电镀镍锡(Brass Tin)
极数 (Poles):	12* 1.5*0.8mm
原料 (Material):	PBT GF/UL-94 V0
温度范围 (Temperature):	-40° - 125°
间距 (Pitch):	5.84mm
额定电流 (Current Rating):	20A - 25A
绝缘电阻 (Insulation Resistance):	100MΩ 最小值
接触电阻 (Contact Rresistance) :	5mΩ (最初)



32.1*72.0*31.8mm




Technical drawing showing dimensions for a 16P connector: 16.38mm total width, 5.84mm pitch, 4.0mm contact width, 6.90mm contact pitch, 28.00mm total length, 4.0mm mounting hole diameter, 1.30mm mounting hole offset, 4.03mm mounting hole diameter, 3.4mm mounting hole offset.

名称 (Name):	16P连接器
编码 (Code):	JHB00475(19428-0016)
金属 (Metal):	黄铜电镀镍锡(Brass Tin)
极数 (Poles):	16* 1.5*0.8mm
原料 (Material):	PBT GF/UL-94 V0
温度范围 (Temperature):	-40° - 125°
间距 (Pitch):	5.84mm
额定电流 (Current Rating):	20A - 25A
绝缘电阻 (Insulation Resistance):	100MΩ 最小值
接触电阻 (Contact Rresistance) :	5mΩ (最初)



38.9*106.6*37.8mm




Technical drawing showing dimensions for a 14P connector: 12.0mm total width, 4.0mm pitch, 4.0mm contact width, 6.90mm contact pitch, 28.00mm total length, 4.0mm mounting hole diameter, 1.30mm mounting hole offset, 4.03mm mounting hole diameter, 3.4mm mounting hole offset.

名称 (Name):	14P连接器 (带上盖)
编码 (Code):	JHB00318
金属 (Metal):	黄铜电镀镍锡(Brass Tin)
极数 (Poles):	14* Φ1.3mm
原料 (Material):	PA66 GF/UL-94 V0
温度范围 (Temperature):	-40° - 125°
间距 (Pitch):	4.0mm
额定电流 (Current Rating):	10A - 15A
绝缘电阻 (Insulation Resistance):	100MΩ 最小值
接触电阻 (Contact Rresistance) :	5mΩ (最初)



38.9*106.6*37.8mm




Technical drawing showing dimensions for a 23P connector: 28.0mm total width, 4.0mm pitch, 4.0mm contact width, 6.90mm contact pitch, 28.00mm total length, 4.0mm mounting hole diameter, 1.30mm mounting hole offset, 4.03mm mounting hole diameter, 3.4mm mounting hole offset.

名称 (Name):	23P连接器 (带上盖)
编码 (Code):	JHB00319
金属 (Metal):	黄铜电镀镍锡(Brass Tin)
极数 (Poles):	23*Φ1.3mm
原料 (Material):	PA66 GF/UL-94 V0
温度范围 (Temperature):	-40° - 125°
间距 (Pitch):	4.0mm
额定电流 (Current Rating):	10A - 15A
绝缘电阻 (Insulation Resistance):	100MΩ 最小值
接触电阻 (Contact Rresistance) :	5mΩ (最初)



38.9*106.6*37.8mm




Technical drawing showing dimensions for a 35P connector: 57.8mm total width, 4.0mm pitch, 4.0mm contact width, 6.90mm contact pitch, 28.00mm total length, 4.0mm mounting hole diameter, 1.30mm mounting hole offset, 4.03mm mounting hole diameter, 3.4mm mounting hole offset.

名称 (Name):	35P连接器 (带上盖)
编码 (Code):	JHB00511
金属 (Metal):	黄铜电镀镍锡(Brass Tin)
极数 (Poles):	35*Φ1.3mm
原料 (Material):	PA66 GF/UL-94 V0
温度范围 (Temperature):	-40° - 125°
间距 (Pitch):	4.0mm
额定电流 (Current Rating):	10A - 15A
绝缘电阻 (Insulation Resistance):	100MΩ 最小值
接触电阻 (Contact Rresistance) :	5mΩ (最初)



36.5*39.0*24.7mm




Technical drawing showing dimensions for a 22P connector: 18.14mm total width, 4.14mm pitch, 4.0mm contact width, 6.90mm contact pitch, 28.00mm total length, 4.0mm mounting hole diameter, 1.30mm mounting hole offset, 4.03mm mounting hole diameter, 3.4mm mounting hole offset.

名称 (Name):	22P连接器
编码 (Code):	JHB00545 (1-794107-0)
金属 (Metal):	黄铜电镀镍锡(Brass Tin)
极数 (Poles):	22* Φ1.0mm
原料 (Material):	Pa66
温度范围 (Temperature):	-40° - 125°
间距 (Pitch):	4.14mm
额定电流 (Current Rating):	8A - 10A
绝缘电阻 (Insulation Resistance):	100MΩ 最小值
接触电阻 (Contact Rresistance) :	5mΩ (最初)



36.5*39.0*24.7mm




26P连接器(5槽)

名称 (Name):	26P连接器(5槽)
编码 (Code):	JHB00427(6473418-2)
金属 (Metal):	黄铜电镀镍金(Brass Gold)
极数 (Poles):	26* Φ 1.0mm
原料 (Material):	PA66 GF/UL-94 V0
温度范围 (Temperature):	-40° - 125°
间距 (Pitch):	3.0mm
额定电流 (Current Rating):	8A - 10A
绝缘电阻 (Insulation Resistance):	100M Ω 最小值
接触电阻 (Contact Rresistance) :	5m Ω (最初)



46.5*27.4*24.0mm




34P连接器

名称 (Name):	34P连接器
编码 (Code):	JHB00320(2-6447232-3)
金属 (Metal):	黄铜电镀镍锡(Brass Tin)
极数 (Poles):	34* Φ 1.0mm
原料 (Material):	PA66 GF/UL-94 V0
温度范围 (Temperature):	-40° - 125°
间距 (Pitch):	3.0mm
额定电流 (Current Rating):	8A - 10A
绝缘电阻 (Insulation Resistance):	100M Ω 最小值
接触电阻 (Contact Rresistance) :	5m Ω (最初)



36.5*39.0*24.7mm




26P连接器 (3导槽)

名称 (Name):	26P连接器 (3导槽)
编码 (Code):	JHB00403(9-6437287-8)
金属 (Metal):	黄铜电镀镍锡(Brass Tin)
极数 (Poles):	26* Φ 1.0mm
原料 (Material):	PBT GF/UL-94 V0
温度范围 (Temperature):	-40° - 125°
间距 (Pitch):	3.0mm
额定电流 (Current Rating):	8A - 10A
绝缘电阻 (Insulation Resistance):	100M Ω 最小值
接触电阻 (Contact Rresistance) :	5m Ω (最初)



46.5*27.4*24.0mm




34P连接器 (3导槽)

名称 (Name):	34P连接器 (3导槽)
编码 (Code):	JHB00404(6437288-1)
金属 (Metal):	黄铜电镀镍锡(Brass Tin)
极数 (Poles):	34* Φ 1.0mm
原料 (Material):	PBT GF/UL-94 V0
温度范围 (Temperature):	-40° - 125°
间距 (Pitch):	3.0mm
额定电流 (Current Rating):	8A - 10A
绝缘电阻 (Insulation Resistance):	100M Ω 最小值
接触电阻 (Contact Rresistance) :	5m Ω (最初)



27.7*78.0*32.0mm




60P连接器

名称 (Name):	60P连接器
编码 (Code):	JHB00020(6437288-3)
金属 (Metal):	黄铜电镀镍锡(Brass Tin)
极数 (Poles):	60* Φ 1.0mm
原料 (Material):	PBT GF/UL-94 V0
温度范围 (Temperature):	-40° - 125°
间距 (Pitch):	3.0mm
额定电流 (Current Rating):	8A - 10A
绝缘电阻 (Insulation Resistance):	100M Ω 最小值
接触电阻 (Contact Rresistance) :	5m Ω (最初)



32.1*72.0*31.8mm




48P连接器

名称 (Name):	48P连接器
编码 (Code):	JHB00590
金属 (Metal):	黄铜电镀镍锡(Brass Tin)
极数 (Poles):	48*0.64*0.64mm
原料 (Material):	PBT GF/UL-94 HB
温度范围 (Temperature):	-40° - 125°
间距 (Pitch):	4.14mm
额定电流 (Current Rating):	2A - 3A
绝缘电阻 (Insulation Resistance):	100M Ω 最小值
接触电阻 (Contact Rresistance) :	5m Ω (最初)



32.1*72.0*31.8mm




16P连接器

名称 (Name):	16P连接器
编码 (Code):	JHB00022
金属 (Metal):	黄铜电镀镍锡(Brass Tin)
极数 (Poles):	16* 2.8*0.8mm
原料 (Material):	PA66 GF/UL-94 V0
温度范围 (Temperature):	-40° - 125°
间距 (Pitch):	6.5mm
额定电流 (Current Rating):	20A - 25A
绝缘电阻 (Insulation Resistance):	100M Ω 最小值
接触电阻 (Contact Rresistance) :	5m Ω (最初)



32.5*92.0*37.0mm




16P连接器

名称 (Name):	16P连接器
编码 (Code):	JHB00417(1-963215-1)
金属 (Metal):	黄铜电镀镍锡(Brass Tin)
极数 (Poles):	16*3.0*0.8
原料 (Material):	PBT GF/UL-94 HB
温度范围 (Temperature):	-40° - 125°
间距 (Pitch):	5.0mm
额定电流 (Current Rating):	20A-25A
绝缘电阻 (Insulation Resistance):	100M Ω 最小值
接触电阻 (Contact Rresistance) :	5m Ω (最初)



32.5*92.0*37.0mm




42P连接器

名称 (Name):	42P连接器
编码 (Code):	JHB00077(967280-1)
金属 (Metal):	黄铜电镀镍锡(Brass Tin)
极数 (Poles):	6*3.0*0.6+36*1.6 mm
原料 (Material):	PBT GF/UL-94 V0
温度范围 (Temperature):	-40° - 125°
间距 (Pitch):	2.0/4.0mm
额定电流 (Current Rating):	10A(小针) + 20A (大针)
绝缘电阻 (Insulation Resistance):	100M Ω 最小值
接触电阻 (Contact Rresistance) :	5m Ω (最初)




16.0*23.0*17.7mm



26P连接器

名称 (Name):	26P连接器
编码 (Code):	JHB00530(6437288-6)
金属 (Metal):	黄铜电镀镍锡(Brass Tin)
极数 (Poles):	26* Φ 1.0mm
原料 (Material):	PA6T GF/UL-94 V0
温度范围 (Temperature):	-40° - 265°
间距 (Pitch):	3.0mm
额定电流 (Current Rating):	8A - 10A
绝缘电阻 (Insulation Resistance):	100M Ω 最小值
接触电阻 (Contact Rresistance) :	5m Ω (最初)

需配合外壳结构防水

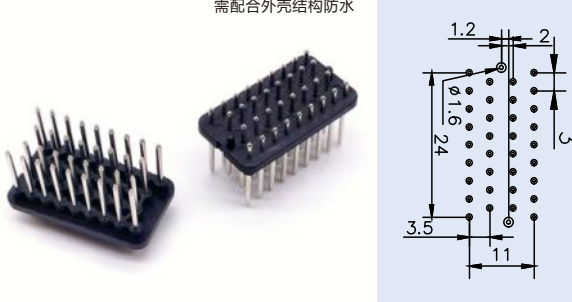

16.0*23.0*17.7mm

名称 (Name):	34P连接器
编码 (Code):	JHB00531(6447232-3)
金属 (Metal):	黄铜电镀镍锡(Brass Tin)
极数 (Poles):	34* Φ 1.0mm
原料 (Material):	PA6T GF/UL-94 V0
温度范围 (Temperature):	-40° - 265°
间距 (Pitch):	3.0mm
额定电流 (Current Rating):	8A -10A
绝缘电阻 (Insulation Resistance):	100M Ω 最小值
接触电阻 (Contact Rresistance) :	5m Ω (最初)


需配合外壳结构防水



14.0*14.0*27.3mm

名称 (Name):	8P连接器
编码 (Code):	JHB00395(2301063-1)
金属 (Metal):	黄铜电镀镍锡(Brass Tin)
极数 (Poles):	8* Φ 1.3mm
原料 (Material):	PA66 GF/UL-94 V0
温度范围 (Temperature):	-40° - 125°
间距 (Pitch):	4.0mm
额定电流 (Current Rating):	10A -15A
绝缘电阻 (Insulation Resistance):	100M Ω 最小值
接触电阻 (Contact Rresistance) :	5m Ω (最初)


需配合外壳结构防水

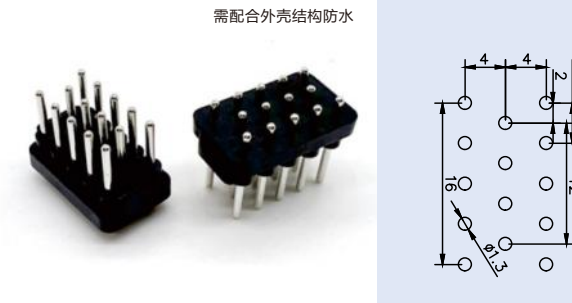

14.0*22.0*27.3mm

名称 (Name):	14P连接器
编码 (Code):	JHB00396(776267-1)
金属 (Metal):	黄铜电镀镍锡(Brass Tin)
极数 (Poles):	14* Φ 1.3mm
原料 (Material):	PA66 GF/UL-94 V0
温度范围 (Temperature):	-40° - 125°
间距 (Pitch):	4.0mm
额定电流 (Current Rating):	10A -15A
绝缘电阻 (Insulation Resistance):	100M Ω 最小值
接触电阻 (Contact Rresistance) :	5m Ω (最初)

需配合外壳结构防水

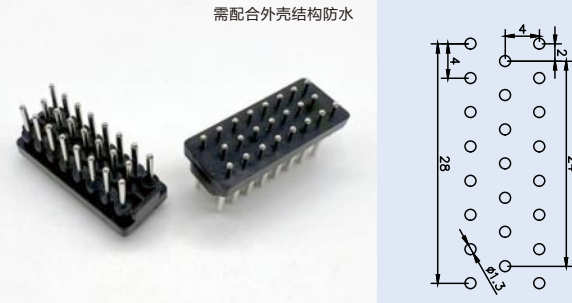

14.0*34.0*27.3mm

名称 (Name):	23P连接器
编码 (Code):	JHB00397(1740313-1)
金属 (Metal):	黄铜电镀镍锡(Brass Tin)
极数 (Poles):	23* Φ 1.3mm
原料 (Material):	PA66 GF/UL-94 V0
温度范围 (Temperature):	-40° - 125°
间距 (Pitch):	4.0mm
额定电流 (Current Rating):	10A -15A
绝缘电阻 (Insulation Resistance):	100M Ω 最小值
接触电阻 (Contact Rresistance) :	5m Ω (最初)

需配合外壳结构防水



14.0*49.6*27.3mm

名称 (Name):	35P连接器
编码 (Code):	JHB00398(1103599-1)
金属 (Metal):	黄铜电镀镍锡(Brass Tin)
极数 (Poles):	35* Φ 1.3mm
原料 (Material):	PA66 GF/UL-94 V0
温度范围 (Temperature):	-40° - 125°
间距 (Pitch):	4.0mm
额定电流 (Current Rating):	10A -15A
绝缘电阻 (Insulation Resistance):	100M Ω 最小值
接触电阻 (Contact Rresistance) :	5m Ω (最初)

需配合外壳结构防水



14.0*14.0*27.3mm

名称 (Name):	8P连接器
编码 (Code):	JHB00042(776276-1)
金属 (Metal):	黄铜电镀镍锡(Brass Tin)
极数 (Poles):	8* Φ 1.3mm
原料 (Material):	PA6T GF/UL-94 V0
温度范围 (Temperature):	-40° - 265°
间距 (Pitch):	4.0mm
额定电流 (Current Rating):	10A -15A
绝缘电阻 (Insulation Resistance):	100M Ω 最小值
接触电阻 (Contact Rresistance) :	5m Ω (最初)


需配合外壳结构防水



14.0*22.0*27.3mm

名称 (Name):	14P连接器
编码 (Code):	JHB00043(776262-1)
金属 (Metal):	黄铜电镀镍锡(Brass Tin)
极数 (Poles):	14* Φ 1.3mm
原料 (Material):	PA6T GF/UL-94 V0
温度范围 (Temperature):	-40° - 265°
间距 (Pitch):	4.0mm
额定电流 (Current Rating):	10A -15A
绝缘电阻 (Insulation Resistance):	100M Ω 最小值
接触电阻 (Contact Rresistance) :	5m Ω (最初)

需配合外壳结构防水

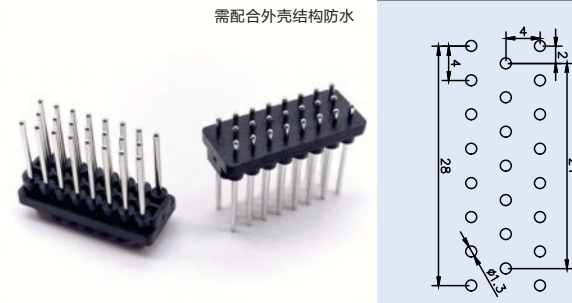

14.0*34.0*27.3mm

名称 (Name):	23P连接器
编码 (Code):	JHB00044((776228-1)
金属 (Metal):	黄铜电镀镍锡(Brass Tin)
极数 (Poles):	23* Φ 1.3mm
原料 (Material):	PA6T GF/UL-94 V0
温度范围 (Temperature):	-40° - 265°
间距 (Pitch):	4.0mm
额定电流 (Current Rating):	10A -15A
绝缘电阻 (Insulation Resistance):	100M Ω 最小值
接触电阻 (Contact Rresistance) :	5m Ω (最初)

需配合外壳结构防水



14.0*49.6*22.0mm
14.0*49.6*27.3mm

名称 (Name):	35P连接器
编码 (Code):	JHB00321/JHB00393(776231-1)
金属 (Metal):	黄铜电镀镍锡(Brass Tin)
极数 (Poles):	35* Φ 1.3mm
原料 (Material):	PA66 GF/UL-94 V0
温度范围 (Temperature):	-40° - 125°
间距 (Pitch):	4.0mm
额定电流 (Current Rating):	10A -15A
绝缘电阻 (Insulation Resistance):	100M Ω 最小值
接触电阻 (Contact Rresistance) :	5m Ω (最初)

需配合外壳结构防水




13.8*15.9*15.9mm

名称 (Name):	4P连接器
编码 (Code):	JHB00023(DT15-4P)
金属 (Metal):	黄铜电镀镍锡(Brass Tin)
极数 (Poles):	4* Φ 1.6mm
原料 (Material):	PA6 GF/UL-94 V0
温度范围 (Temperature):	-40° - 125°
间距 (Pitch):	4.4mm
额定电流 (Current Rating):	15A -20A
绝缘电阻 (Insulation Resistance):	100M Ω 最小值
接触电阻 (Contact Rresistance) :	5m Ω (最初)

需配合外壳结构防水




13.8*19.8*15.9mm



名称 (Name):	6P连接器
编码 (Code):	JHB00024(DT15-6P)
金属 (Metal):	黄铜电镀镍锡(Brass Tin)
极数 (Poles):	6* Φ1.6mm
原料 (Material):	PA6 GF/UL-94 V0
温度范围 (Temperature):	-40° - 125°
间距 (Pitch):	4.4mm
额定电流 (Current Rating):	15A - 20A
绝缘电阻 (Insulation Resistance):	100MΩ 最小值
接触电阻 (Contact Rresistance) :	5mΩ (最初)




12.5*14.0*18.4mm



名称 (Name):	4P连接器
编码 (Code):	JHB00090(1565749-2)
金属 (Metal):	黄铜电镀镍锡(Brass Tin)
极数 (Poles):	4* 0.64*0.64mm
原料 (Material):	PBT GF/UL-94 HB
温度范围 (Temperature):	-40° - 125°
间距 (Pitch):	2.2mm
额定电流 (Current Rating):	2A - 3A
绝缘电阻 (Insulation Resistance):	100MΩ 最小值
接触电阻 (Contact Rresistance) :	5mΩ (最初)




15.3*14.2*18.4mm



名称 (Name):	8P连接器
编码 (Code):	JHB00263(1376350-2)
金属 (Metal):	黄铜电镀镍锡(Brass Tin)
极数 (Poles):	8* 0.64*0.64mm
原料 (Material):	PBT GF/UL-94 HB
温度范围 (Temperature):	-40° - 125°
间距 (Pitch):	2.2mm
额定电流 (Current Rating):	2A - 3A
绝缘电阻 (Insulation Resistance):	100MΩ 最小值
接触电阻 (Contact Rresistance) :	5mΩ (最初)




15.3*18.6*18.4mm



名称 (Name):	12P连接器
编码 (Code):	JHB00264(1318772-2)
金属 (Metal):	黄铜电镀镍锡(Brass Tin)
极数 (Poles):	12* 0.64*0.64mm
原料 (Material):	PBT GF/UL-94 HB
温度范围 (Temperature):	-40° - 125°
间距 (Pitch):	2.2mm
额定电流 (Current Rating):	2A - 3A
绝缘电阻 (Insulation Resistance):	100MΩ 最小值
接触电阻 (Contact Rresistance) :	5mΩ (最初)




15.3*23.0*18.4mm



名称 (Name):	16P连接器
编码 (Code):	JHB00266(1318382-2)
金属 (Metal):	黄铜电镀镍锡(Brass Tin)
极数 (Poles):	16* 0.64*0.64mm
原料 (Material):	PBT GF/UL-94 HB
温度范围 (Temperature):	-40° - 125°
间距 (Pitch):	2.2mm
额定电流 (Current Rating):	2A - 3A
绝缘电阻 (Insulation Resistance):	100MΩ 最小值
接触电阻 (Contact Rresistance) :	5mΩ (最初)




15.3*32.2*18.4mm



名称 (Name):	24P连接器
编码 (Code):	JHB00358(1318853-2)
金属 (Metal):	黄铜电镀镍锡(Brass Tin)
极数 (Poles):	24* 0.64*0.64mm
原料 (Material):	PBT GF/UL-94 HB
温度范围 (Temperature):	-40° - 125°
间距 (Pitch):	2.2mm
额定电流 (Current Rating):	2A - 3A
绝缘电阻 (Insulation Resistance):	100MΩ 最小值
接触电阻 (Contact Rresistance) :	5mΩ (最初)




15.3*36.2*18.4mm



名称 (Name):	28P连接器
编码 (Code):	JHB00223(1565373-4)
金属 (Metal):	黄铜电镀镍锡(Brass Tin)
极数 (Poles):	28* 0.64*0.64mm
原料 (Material):	PBT GF/UL-94 HB
温度范围 (Temperature):	-40° - 125°
间距 (Pitch):	2.2mm
额定电流 (Current Rating):	2A - 3A
绝缘电阻 (Insulation Resistance):	100MΩ 最小值
接触电阻 (Contact Rresistance) :	5mΩ (最初)




15.3*40.6*18.4mm



名称 (Name):	32P连接器
编码 (Code):	JHB00012(1318745-1)
金属 (Metal):	黄铜电镀镍锡(Brass Tin)
极数 (Poles):	32* 0.64*0.64mm
原料 (Material):	PBT GF/UL-94 HB
温度范围 (Temperature):	-40° - 125°
间距 (Pitch):	2.2mm
额定电流 (Current Rating):	2A - 3A
绝缘电阻 (Insulation Resistance):	100MΩ 最小值
接触电阻 (Contact Rresistance) :	5mΩ (最初)




15.3*49.4*18.4mm




名称 (Name):	40P连接器
编码 (Code):	JHB00265(1318384-2)
金属 (Metal):	黄铜电镀镍锡(Brass Tin)
极数 (Poles):	40* 0.64*0.64mm
原料 (Material):	PBT GF/UL-94 HB
温度范围 (Temperature):	-40° - 125°
间距 (Pitch):	2.2mm
额定电流 (Current Rating):	2A - 3A
绝缘电阻 (Insulation Resistance):	100MΩ 最小值
接触电阻 (Contact Rresistance) :	5mΩ (最初)



13.2*49.7*23.5mm




名称 (Name):	40P连接器
编码 (Code):	JHB00004(1376113-2)
金属 (Metal):	黄铜电镀镍锡(Brass Tin)
极数 (Poles):	40* 0.64*0.64mm
原料 (Material):	PBT GF/UL-94 HB
温度范围 (Temperature):	-40° - 125°
间距 (Pitch):	2.2mm
额定电流 (Current Rating):	2A - 3A
绝缘电阻 (Insulation Resistance):	100MΩ 最小值
接触电阻 (Contact Rresistance) :	5mΩ (最初)

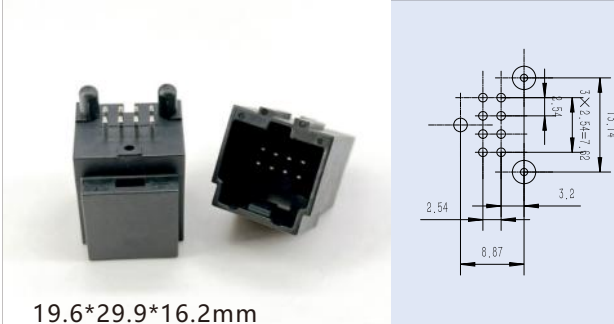


19.6*29.9*16.2mm

名称 (Name):	8P连接器
编码 (Code):	JHB00518(30700-4085)
金属 (Metal):	黄铜电镀镍锡(Brass Tin)
极数 (Poles):	8* 0.6*0.8mm
原料 (Material):	PBT GF/UL-94 HB
温度范围 (Temperature):	-40° - 105°
间距 (Pitch):	2.54mm
额定电流 (Current Rating):	2A - 3A
绝缘电阻 (Insulation Resistance):	100MΩ 最小值
接触电阻 (Contact Rresistance) :	5mΩ (最初)

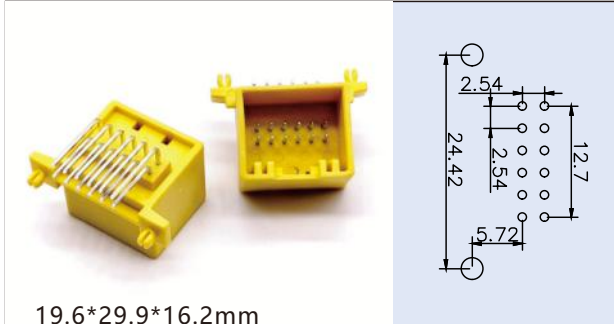


19.6*29.9*16.2mm

名称 (Name):	12P连接器
编码 (Code):	JHB00045
金属 (Metal):	黄铜电镀镍锡(Brass Tin)
极数 (Poles):	12* 0.64*0.64mm
原料 (Material):	PBT GF/UL-94 HB
温度范围 (Temperature):	-40° - 125°
间距 (Pitch):	2.54mm
额定电流 (Current Rating):	2A - 3A
绝缘电阻 (Insulation Resistance):	100MΩ 最小值
接触电阻 (Contact Rresistance) :	5mΩ (最初)

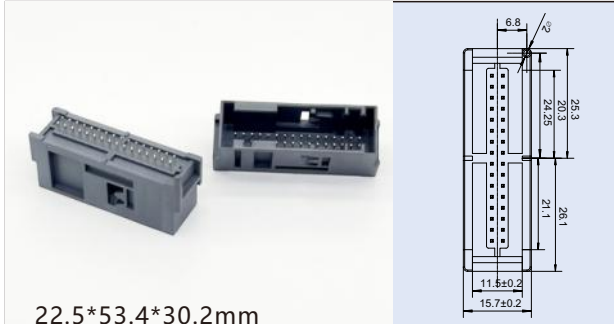


22.5*53.4*30.2mm

名称 (Name):	32P连接器(灰)
编码 (Code):	JHB00564 (967598-1)
金属 (Metal):	黄铜电镀镍锡(Brass Tin)
极数 (Poles):	32* 0.64*0.64mm
原料 (Material):	PBT GF/UL-94 HB
温度范围 (Temperature):	-40° - 125°
间距 (Pitch):	2.54mm
额定电流 (Current Rating):	2A - 3A
绝缘电阻 (Insulation Resistance):	100MΩ 最小值
接触电阻 (Contact Rresistance) :	5mΩ (最初)

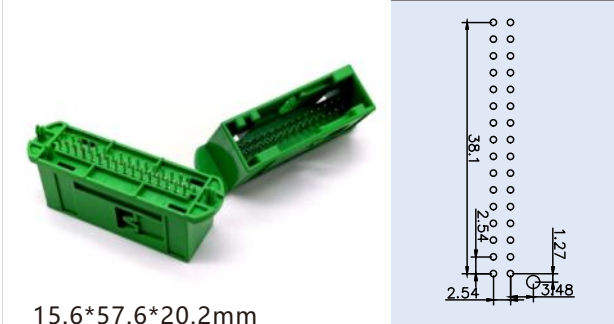


15.6*57.6*20.2mm

名称 (Name):	32P连接器(绿)
编码 (Code):	JHB00361(966658-1)
金属 (Metal):	黄铜电镀镍锡(Brass Tin)
极数 (Poles):	32* 0.64*0.64mm
原料 (Material):	PBT GF/UL-94 HB
温度范围 (Temperature):	-40° - 125°
间距 (Pitch):	2.54mm
额定电流 (Current Rating):	2A - 3A
绝缘电阻 (Insulation Resistance):	100MΩ 最小值
接触电阻 (Contact Rresistance) :	5mΩ (最初)

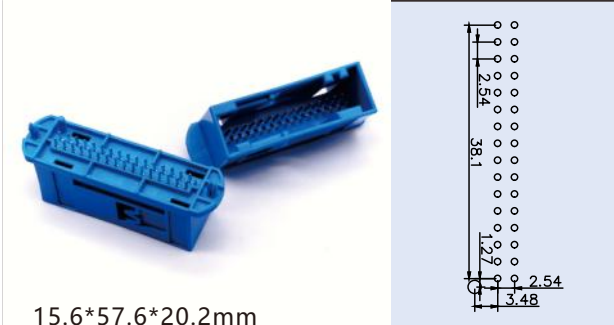

15.6*57.6*20.2mm

名称 (Name):	32P连接器(蓝)
编码 (Code):	JHB00360(966658-2)
金属 (Metal):	黄铜电镀镍锡(Brass Tin)
极数 (Poles):	32* 0.64*0.64mm
原料 (Material):	PBT GF/UL-94 HB
温度范围 (Temperature):	-40° - 125°
间距 (Pitch):	2.54mm
额定电流 (Current Rating):	2A - 3A
绝缘电阻 (Insulation Resistance):	100MΩ 最小值
接触电阻 (Contact Rresistance) :	5mΩ (最初)

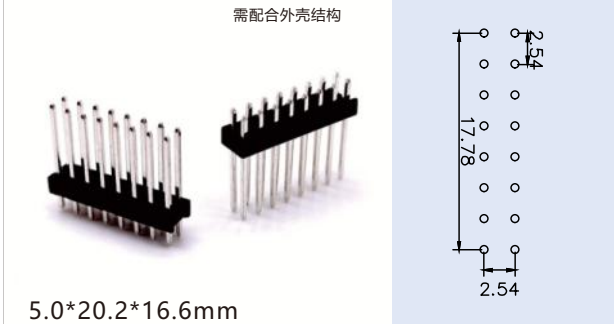

5.0*20.2*16.6mm

名称 (Name):	16P连接器
编码 (Code):	JHB00293(103254-7)
金属 (Metal):	黄铜电镀镍锡(Brass Tin)
极数 (Poles):	16* 0.64*0.64mm
原料 (Material):	PA66 GF/UL-94 V0
温度范围 (Temperature):	-40° - 125°
间距 (Pitch):	2.54mm
额定电流 (Current Rating):	2A - 3A
绝缘电阻 (Insulation Resistance):	100MΩ 最小值
接触电阻 (Contact Rresistance) :	5mΩ (最初)



5.0*25.2*16.6mm

名称 (Name):	20P连接器
编码 (Code):	JHB00294(103254-9)
金属 (Metal):	黄铜电镀镍锡(Brass Tin)
极数 (Poles):	20* 0.64*0.64mm
原料 (Material):	PA66 GF/UL-94 V0
温度范围 (Temperature):	-40° - 125°
间距 (Pitch):	2.54mm
额定电流 (Current Rating):	2A - 3A
绝缘电阻 (Insulation Resistance):	100MΩ 最小值
接触电阻 (Contact Rresistance) :	5mΩ (最初)



5.0*25.2*16.6mm

名称 (Name):	32P连接器
编码 (Code):	JHB00504(966658-1/2)
金属 (Metal):	黄铜电镀镍锡(Brass Tin)
极数 (Poles):	32* 0.64*0.64mm
原料 (Material):	PA66 GF/UL-94 V0
温度范围 (Temperature):	-40° - 125°
间距 (Pitch):	2.54mm
额定电流 (Current Rating):	2A - 3A
绝缘电阻 (Insulation Resistance):	100MΩ 最小值
接触电阻 (Contact Rresistance) :	5mΩ (最初)



塑胶: 3.2*35.3mm 端子: 0.64*14.2
塑胶: 3.2*35.3mm 端子: 0.64*16.6
塑胶: 2.5*35.3mm 端子: 0.64*14.7

名称 (Name):	52P连接器
编码 (Code):	JHB00472/JHB00516/JHB00525
金属 (Metal):	黄铜电镀镍锡(Brass Tin)
极数 (Poles):	52* 0.64*0.64mm
原料 (Material):	PA66 GF/UL-94 V0
温度范围 (Temperature):	-40° - 125°
间距 (Pitch):	2.54mm
额定电流 (Current Rating):	2A - 3A
绝缘电阻 (Insulation Resistance):	100MΩ 最小值
接触电阻 (Contact Rresistance) :	5mΩ (最初)




塑胶: 4.5*65.4mm 端子: 0.64*14.2
塑胶: 4.5*65.4mm 端子: 0.64*16.6

名称 (Name):	44P连接器
编码 (Code):	JHB00014/JHB00300(MG645802)
金属 (Metal):	黄铜电镀镍锡(Brass Tin)
极数 (Poles):	44* 0.64*0.64mm
原料 (Material):	PA6T GF/UL-94 V0
温度范围 (Temperature):	-40° - 265°
间距 (Pitch):	2.54mm
额定电流 (Current Rating):	2A - 3A
绝缘电阻 (Insulation Resistance):	100MΩ 最小值
接触电阻 (Contact Rresistance) :	5mΩ (最初)

需配合外壳结构



6.6*39.2*17.3mm




名称 (Name):	28P连接器
编码 (Code):	JHB00206(MG644088)
金属 (Metal):	黄铜电镀镍锡(Brass Tin)
极数 (Poles):	28* 0.64*0.64mm
原料 (Material):	PA6T GF/UL-94 V0
温度范围 (Temperature):	-40° - 265°
间距 (Pitch):	2.2mm
额定电流 (Current Rating):	2A - 3A
绝缘电阻 (Insulation Resistance):	100MΩ 最小值
接触电阻 (Contact Rresistance) :	5mΩ (最初)

需配合外壳结构




16.4*31.1*16.3mm




名称 (Name):	18P连接器
编码 (Code):	JHB00013(MG645701)
金属 (Metal):	黄铜电镀镍锡(Brass Tin)
极数 (Poles):	18* 1.5*0.6mm
原料 (Material):	PA6T GF/UL-94 V0
温度范围 (Temperature):	-40° - 265°
间距 (Pitch):	3.2mm
额定电流 (Current Rating):	5A - 8A
绝缘电阻 (Insulation Resistance):	100MΩ 最小值
接触电阻 (Contact Rresistance) :	5mΩ (最初)

需配合外壳结构

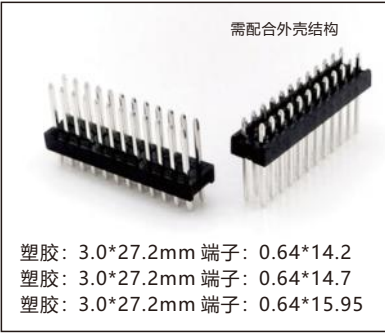


塑胶: 3.0*27.2mm 端子: 0.64*14.2
塑胶: 3.0*27.2mm 端子: 0.64*14.7
塑胶: 3.0*27.2mm 端子: 0.64*15.95




名称 (Name):	24P连接器(1376111-2)
编码 (Code):	JHB00350/JHB00523/JHB00527
金属 (Metal):	黄铜电镀镍锡(Brass Tin)
极数 (Poles):	24* 0.64*0.64mm
原料 (Material):	PA66GF/UL-94 HB
温度范围 (Temperature):	-40° - 125°
间距 (Pitch):	2.2mm
额定电流 (Current Rating):	3A - 5A
绝缘电阻 (Insulation Resistance):	100MΩ 最小值
接触电阻 (Contact Rresistance) :	5mΩ (最初)

需配合外壳结构

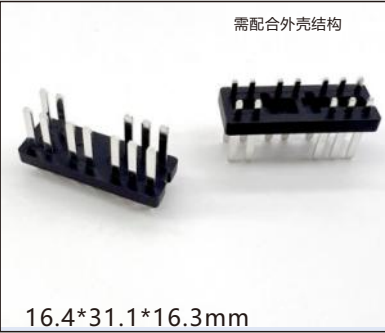

16.4*31.1*16.3mm




名称 (Name):	12P连接器
编码 (Code):	JHB00521(174957-1)
金属 (Metal):	黄铜电镀镍锡(Brass Tin)
极数 (Poles):	12* 1.7*0.6mm
原料 (Material):	PA66 GF/UL-94 V0
温度范围 (Temperature):	-40° - 125°
间距 (Pitch):	3.5mm
额定电流 (Current Rating):	5A - 8A
绝缘电阻 (Insulation Resistance):	100MΩ 最小值
接触电阻 (Contact Rresistance) :	5mΩ (最初)

需配合外壳结构



塑胶: 3.0*36mm 端子: 0.64*14.2
塑胶: 4.0*36mm 端子: 0.64*15.95




名称 (Name):	32P连接器
编码 (Code):	JHB00351/JHB00499
金属 (Metal):	黄铜电镀镍锡(Brass Tin)
极数 (Poles):	32* 0.64*0.64mm
原料 (Material):	PA66 GF/UL-94 V0
温度范围 (Temperature):	-40° - 125°
间距 (Pitch):	2.2mm
额定电流 (Current Rating):	3A - 5A
绝缘电阻 (Insulation Resistance):	100MΩ 最小值
接触电阻 (Contact Rresistance) :	5mΩ (最初)

需配合外壳结构




8.6*34.6*17.2mm




名称 (Name):	12P连接器
编码 (Code):	JHB00204(MG642466)
金属 (Metal):	黄铜电镀镍锡(Brass Tin)
极数 (Poles):	12* 2.3*0.6mm
原料 (Material):	PA6T GF/UL-94 V0
温度范围 (Temperature):	-40° - 265°
间距 (Pitch):	4.0mm
额定电流 (Current Rating):	10A - 12A
绝缘电阻 (Insulation Resistance):	100MΩ 最小值
接触电阻 (Contact Rresistance) :	5mΩ (最初)

需配合外壳结构

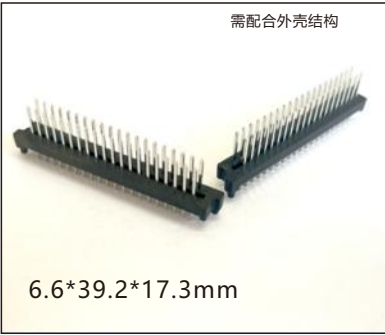

6.6*39.2*17.3mm




名称 (Name):	40P连接器
编码 (Code):	JHB00500(1376113-2)
金属 (Metal):	黄铜电镀镍锡(Brass Tin)
极数 (Poles):	40* 0.64*0.64mm
原料 (Material):	PA6T GF/UL-94 V0
温度范围 (Temperature):	-40° - 265°
间距 (Pitch):	2.2mm
额定电流 (Current Rating):	2A - 3A
绝缘电阻 (Insulation Resistance):	100MΩ 最小值
接触电阻 (Contact Rresistance) :	5mΩ (最初)

需配合外壳结构



8.6*39.0*17.2mm




名称 (Name):	16P连接器
编码 (Code):	JHB00205(MG643200)
金属 (Metal):	黄铜电镀镍锡(Brass Tin)
极数 (Poles):	16* 2.3*0.6mm
原料 (Material):	PA6T GF/UL-94 V0
温度范围 (Temperature):	-40° - 265°
间距 (Pitch):	4.0mm
额定电流 (Current Rating):	10A - 12A
绝缘电阻 (Insulation Resistance):	100MΩ 最小值
接触电阻 (Contact Rresistance) :	5mΩ (最初)

需配合外壳结构



9.7*28.0*19.0mm




名称 (Name):	16P连接器
编码 (Code):	JHB00102
金属 (Metal):	黄铜电镀镍锡(Brass Tin)
极数 (Poles):	16* 1.5*0.8mm
原料 (Material):	PA66 GF/UL-94 V0
温度范围 (Temperature):	-40° - 125°
间距 (Pitch):	3.5mm
额定电流 (Current Rating):	10A - 12A
绝缘电阻 (Insulation Resistance):	100MΩ 最小值
接触电阻 (Contact Rresistance) :	5mΩ (最初)



需配合外壳结构





10.4*29.9*19.0mm




名称 (Name):	12P连接器
编码 (Code):	JHB00101
金属 (Metal):	黄铜电镀镍锡(Brass Tin)
极数 (Poles):	12* 2.8*0.8mm
原料 (Material):	PA66 GF/UL-94 HB
温度范围 (Temperature):	-40° - 125°
间距 (Pitch):	5.0mm
额定电流 (Current Rating):	18A - 20A
绝缘电阻 (Insulation Resistance):	100MΩ 最小值
接触电阻 (Contact Rresistance) :	5mΩ (最初)

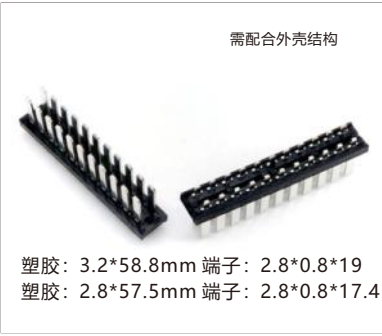


名称 (Name):	22P连接器
编码 (Code):	JHB00349/JHB00522(963357-1)
金属 (Metal):	黄铜电镀镍锡(Brass Tin)
极数 (Poles):	22* 2.8*0.8mm
原料 (Material):	PA66 GF/UL-94 V0
温度范围 (Temperature):	-40° - 125°
间距 (Pitch):	5mm
额定电流 (Current Rating):	3A - 5A
绝缘电阻 (Insulation Resistance):	100MΩ 最小值
接触电阻 (Contact Rresistance) :	5mΩ (最初)

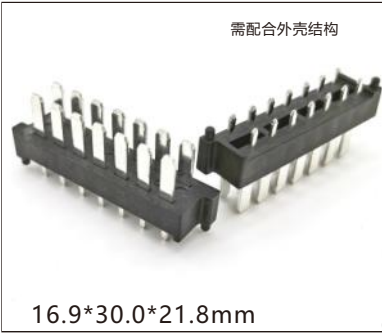


名称 (Name):	14P连接器
编码 (Code):	JHB00498(963357-3)
金属 (Metal):	黄铜电镀镍锡(Brass Tin)
极数 (Poles):	14* 2.8*0.8mm
原料 (Material):	PA6T GF/UL-94 V0
温度范围 (Temperature):	-40° - 265°
间距 (Pitch):	5mm
额定电流 (Current Rating):	3A - 5A
绝缘电阻 (Insulation Resistance):	100MΩ 最小值
接触电阻 (Contact Rresistance) :	5mΩ (最初)




名称 (Name):	22P连接器
编码 (Code):	JHB00303(963357-1)
金属 (Metal):	黄铜电镀镍锡(Brass Tin)
极数 (Poles):	22* 3.0*0.8mm
原料 (Material):	PA6T GF/UL-94V0
温度范围 (Temperature):	-40° - 265°
间距 (Pitch):	5.0mm
额定电流 (Current Rating):	20A - 25A
绝缘电阻 (Insulation Resistance):	100MΩ 最小值
接触电阻 (Contact Rresistance) :	5mΩ (最初)




名称 (Name):	25P连接器
编码 (Code):	JHB00524(1670615)
金属 (Metal):	黄铜电镀镍锡(Brass Tin)
极数 (Poles):	18* 1.7*0.6+7* 2.8*0.8
原料 (Material):	PA66 GF/UL-94 V0
温度范围 (Temperature):	-40° - 125°
间距 (Pitch):	4.0mm/5.0mm
额定电流 (Current Rating):	10A /20A
绝缘电阻 (Insulation Resistance):	100MΩ 最小值
接触电阻 (Contact Rresistance) :	5mΩ (最初)




名称 (Name):	48P连接器
编码 (Code):	JHB00352/JHB00515
金属 (Metal):	黄铜电镀镍锡(Brass Tin)
极数 (Poles):	8* 1.5*0.8+40* 0.64*0.64
原料 (Material):	PA66 GF/UL-94 V0
温度范围 (Temperature):	-40° - 125°
间距 (Pitch):	3.7mm/2.5mm
额定电流 (Current Rating):	3A - 5A
绝缘电阻 (Insulation Resistance):	100MΩ 最小值
接触电阻 (Contact Rresistance) :	5mΩ (最初)




名称 (Name):	12P连接器
编码 (Code):	JHB00117(174051-2)
金属 (Metal):	黄铜电镀镍锡(Brass Tin)
极数 (Poles):	12* 1.0*0.6mm
原料 (Material):	PBT GF/UL-94 HB
温度范围 (Temperature):	-40° - 125°
间距 (Pitch):	2.5mm
额定电流 (Current Rating):	3A - 5A
绝缘电阻 (Insulation Resistance):	100MΩ 最小值
接触电阻 (Contact Rresistance) :	5mΩ (最初)




名称 (Name):	20P连接器
编码 (Code):	JHB00003(174055-2)
金属 (Metal):	黄铜电镀镍锡(Brass Tin)
极数 (Poles):	20* 1.0*0.6mm
原料 (Material):	PBT GF/UL-94 HB
温度范围 (Temperature):	-40° - 125°
间距 (Pitch):	2.5mm
额定电流 (Current Rating):	3A - 5A
绝缘电阻 (Insulation Resistance):	100MΩ 最小值
接触电阻 (Contact Rresistance) :	5mΩ (最初)



名称 (Name):	20P连接器
编码 (Code):	JHB00104(175975-2)
金属 (Metal):	黄铜电镀镍锡(Brass Tin)
极数 (Poles):	20* 1.0*0.6mm
原料 (Material):	PBT GF/UL-94 HB
温度范围 (Temperature):	-40° - 125°
间距 (Pitch):	2.5mm
额定电流 (Current Rating):	3A - 5A
绝缘电阻 (Insulation Resistance):	100MΩ 最小值
接触电阻 (Contact Rresistance) :	5mΩ (最初)




名称 (Name):	36P连接器
编码 (Code):	JHB00122(174146-2)
金属 (Metal):	黄铜电镀镍锡(Brass Tin)
极数 (Poles):	36* 1.0*0.6mm
原料 (Material):	PBT GF/UL-94 HB
温度范围 (Temperature):	-40° - 125°
间距 (Pitch):	2.5mm
额定电流 (Current Rating):	3A - 5A
绝缘电阻 (Insulation Resistance):	100MΩ 最小值
接触电阻 (Contact Rresistance) :	5mΩ (最初)



名称 (Name):	36P连接器
编码 (Code):	JHB00449(174912-2)
金属 (Metal):	黄铜电镀镍锡(Brass Tin)
极数 (Poles):	36* 1.0*0.6mm
原料 (Material):	PBT GF/UL-94 HB
温度范围 (Temperature):	-40° - 125°
间距 (Pitch):	2.5mm
额定电流 (Current Rating):	3A - 5A
绝缘电阻 (Insulation Resistance):	100MΩ 最小值
接触电阻 (Contact Rresistance) :	5mΩ (最初)




19.6*60.5*16.2mm



名称 (Name):	40P连接器 (灰)
编码 (Code):	JHB00047 (DJ7403Y-0.6-10)
金属 (Metal):	黄铜电镀镍锡(Brass Tin)
极数 (Poles):	40* 0.64*0.64mm
原料 (Material):	PBT GF/UL-94 V0
温度范围 (Temperature):	-40° - 125°
间距 (Pitch):	2.54mm
额定电流 (Current Rating):	2A - 3A
绝缘电阻 (Insulation Resistance):	100MΩ 最小值
接触电阻 (Contact Rresistance) :	5mΩ (最初)




15.8*32.7*23.5mm



名称 (Name):	8P连接器
编码 (Code):	JHB00387(174955-1)
金属 (Metal):	黄铜电镀镍锡(Brass Tin)
极数 (Poles):	12* 1.7*0.6mm
原料 (Material):	PBT GF/UL-94 HB
温度范围 (Temperature):	-40° - 125°
间距 (Pitch):	3.5mm
额定电流 (Current Rating):	8A - 10A
绝缘电阻 (Insulation Resistance):	100MΩ 最小值
接触电阻 (Contact Rresistance) :	5mΩ (最初)




16.9*37.5*19.2mm



名称 (Name):	20P连接器
编码 (Code):	JHB00015(174977-2)
金属 (Metal):	黄铜电镀镍锡(Brass Tin)
极数 (Poles):	20* 1.0*0.6mm
原料 (Material):	PBT GF/UL-94 HB
温度范围 (Temperature):	-40° - 125°
间距 (Pitch):	2.5mm
额定电流 (Current Rating):	3A - 5A
绝缘电阻 (Insulation Resistance):	100MΩ 最小值
接触电阻 (Contact Rresistance) :	5mΩ (最初)




15.8*32.7*23.5mm



名称 (Name):	12P连接器
编码 (Code):	JHB00109(174957-1)
金属 (Metal):	黄铜电镀镍锡(Brass Tin)
极数 (Poles):	12* 1.7*0.6mm
原料 (Material):	PBT GF/UL-94 HB
温度范围 (Temperature):	-40° - 125°
间距 (Pitch):	3.5mm
额定电流 (Current Rating):	8A - 10A
绝缘电阻 (Insulation Resistance):	100MΩ 最小值
接触电阻 (Contact Rresistance) :	5mΩ (最初)




16.9*37.5*21.6mm



名称 (Name):	20P连接器
编码 (Code):	JHB00128(179254-2)
金属 (Metal):	黄铜电镀镍锡(Brass Tin)
极数 (Poles):	20* 1.0*0.6mm
原料 (Material):	PBT GF/UL-94 HB
温度范围 (Temperature):	-40° - 125°
间距 (Pitch):	2.5mm
额定电流 (Current Rating):	3A - 5A
绝缘电阻 (Insulation Resistance):	100MΩ 最小值
接触电阻 (Contact Rresistance) :	5mΩ (最初)




15.8*34.5*23.5mm



名称 (Name):	12P连接器
编码 (Code):	JHB00005(284162-1)
金属 (Metal):	黄铜电镀镍锡(Brass Tin)
极数 (Poles):	6* 2.8*0.6+6* 1.7*0.6mm
原料 (Material):	PBT GF/UL-94 HB
温度范围 (Temperature):	-40° - 125°
间距 (Pitch):	3.5mm/5.0mm
额定电流 (Current Rating):	12A - 15A/ 8A-10A
绝缘电阻 (Insulation Resistance):	100MΩ 最小值
接触电阻 (Contact Rresistance) :	5mΩ (最初)




16.9*51.0*21.6mm



名称 (Name):	28P连接器
编码 (Code):	JHB00017(174979-2)
金属 (Metal):	黄铜电镀镍锡(Brass Tin)
极数 (Poles):	28* 1.0*0.6mm
原料 (Material):	PBT GF/UL-94 HB
温度范围 (Temperature):	-40° - 125°
间距 (Pitch):	2.5mm
额定电流 (Current Rating):	3A - 5A
绝缘电阻 (Insulation Resistance):	100MΩ 最小值
接触电阻 (Contact Rresistance) :	5mΩ (最初)




15.8*34.5*23.5mm



名称 (Name):	12P连接器 (绿)
编码 (Code):	JHB00009(284162-3)
金属 (Metal):	黄铜电镀镍锡(Brass Tin)
极数 (Poles):	6* 2.8*0.6+6* 1.7*0.6mm
原料 (Material):	PBT GF/UL-94 HB
温度范围 (Temperature):	-40° - 125°
间距 (Pitch):	3.5mm/5.0mm
额定电流 (Current Rating):	12A - 15A/ 8A-10A
绝缘电阻 (Insulation Resistance):	100MΩ 最小值
接触电阻 (Contact Rresistance) :	5mΩ (最初)




16.9*61.0*21.6mm




名称 (Name):	36P连接器
编码 (Code):	JHB00016(175977-2)
金属 (Metal):	黄铜电镀镍锡(Brass Tin)
极数 (Poles):	36* 1.0*0.6mm
原料 (Material):	PBT GF/UL-94 HB
温度范围 (Temperature):	-40° - 125°
间距 (Pitch):	2.5mm
额定电流 (Current Rating):	3A - 5A
绝缘电阻 (Insulation Resistance):	100MΩ 最小值
接触电阻 (Contact Rresistance) :	5mΩ (最初)




15.8*46.7*23.5mm





名称 (Name):	20P连接器
编码 (Code):	JHB00152(174960-1)
金属 (Metal):	黄铜电镀镍锡(Brass Tin)
极数 (Poles):	20* 1.7*0.6mm
原料 (Material):	PBT GF/UL-94 HB
温度范围 (Temperature):	-40° - 125°
间距 (Pitch):	3.5mm
额定电流 (Current Rating):	8A - 10A
绝缘电阻 (Insulation Resistance):	100MΩ 最小值
接触电阻 (Contact Rresistance) :	5mΩ (最初)




名称 (Name):	12P连接器
编码 (Code):	JHB00454(173858-1)
金属 (Metal):	黄铜电镀镍锡(Brass Tin)
极数 (Poles):	12* 1.7*0.6mm
原料 (Material):	PBT GF/UL-94 HB
温度范围 (Temperature):	-40° - 125°
间距 (Pitch):	3.5mm
额定电流 (Current Rating):	8A - 10A
绝缘电阻 (Insulation Resistance):	100MΩ 最小值
接触电阻 (Contact Rresistance) :	5mΩ (最初)




名称 (Name):	20P连接器
编码 (Code):	JHB00107(175785-2)
金属 (Metal):	黄铜电镀镍锡(Brass Tin)
极数 (Poles):	20* 1.7*0.6mm
原料 (Material):	PBT GF/UL-94 HB
温度范围 (Temperature):	-40° - 125°
间距 (Pitch):	3.5mm
额定电流 (Current Rating):	8A - 10A
绝缘电阻 (Insulation Resistance):	100MΩ 最小值
接触电阻 (Contact Rresistance) :	5mΩ (最初)

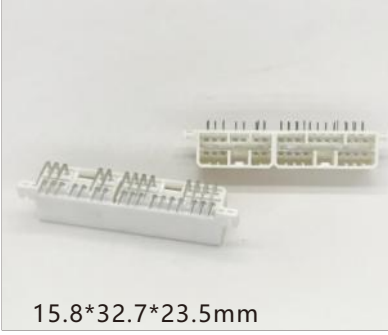


名称 (Name):	30P连接器
编码 (Code):	JHB00211 (173866-1)
金属 (Metal):	黄铜电镀镍锡(Brass Tin)
极数 (Poles):	30* 1.7*0.6mm
原料 (Material):	PBT GF/UL-94 HB
温度范围 (Temperature):	-40° - 125°
间距 (Pitch):	3.5mm
额定电流 (Current Rating):	8A - 10A
绝缘电阻 (Insulation Resistance):	100MΩ 最小值
接触电阻 (Contact Rresistance) :	5mΩ (最初)




名称 (Name):	9P连接器
编码 (Code):	JHB00001(171894-1)
金属 (Metal):	黄铜电镀镍锡(Brass Tin)
极数 (Poles):	9* 3.0*0.6mm
原料 (Material):	PA66 GF/UL-94 V1
温度范围 (Temperature):	-40° - 125°
间距 (Pitch):	5.0mm
额定电流 (Current Rating):	15A - 18A
绝缘电阻 (Insulation Resistance):	100MΩ 最小值
接触电阻 (Contact Rresistance) :	5mΩ (最初)




名称 (Name):	12P连接器 (绿)
编码 (Code):	JHB00046
金属 (Metal):	黄铜电镀镍锡(Brass Tin)
极数 (Poles):	12* 2.8*0.6mm
原料 (Material):	PBT GF/UL-94 V0
温度范围 (Temperature):	-40° - 125°
间距 (Pitch):	5.0mm
额定电流 (Current Rating):	12A - 15A
绝缘电阻 (Insulation Resistance):	100MΩ 最小值
接触电阻 (Contact Rresistance) :	5mΩ (最初)




名称 (Name):	5P连接器
编码 (Code):	JHB00089(7051-3-10)
金属 (Metal):	黄铜电镀镍锡(Brass Tin)
极数 (Poles):	5* 3.0*0.6mm
原料 (Material):	PA6 /UL-94 HB
温度范围 (Temperature):	-40° - 125°
间距 (Pitch):	7.0mm
额定电流 (Current Rating):	15A - 18A
绝缘电阻 (Insulation Resistance):	100MΩ 最小值
接触电阻 (Contact Rresistance) :	5mΩ (最初)




名称 (Name):	7P连接器
编码 (Code):	JHB00098(7071-3-10)
金属 (Metal):	黄铜电镀镍锡(Brass Tin)
极数 (Poles):	7* 3.0*0.6mm
原料 (Material):	PA6 /UL-94 HB
温度范围 (Temperature):	-40° - 125°
间距 (Pitch):	7.0mm
额定电流 (Current Rating):	15A - 18A
绝缘电阻 (Insulation Resistance):	100MΩ 最小值
接触电阻 (Contact Rresistance) :	5mΩ (最初)




名称 (Name):	9P连接器
编码 (Code):	JHB00092(7091-3-10)
金属 (Metal):	黄铜电镀镍锡(Brass Tin)
极数 (Poles):	9* 3.0*0.6mm
原料 (Material):	PA6 GF/UL-94 HB
温度范围 (Temperature):	-40° - 125°
间距 (Pitch):	7.0mm
额定电流 (Current Rating):	15A - 18A
绝缘电阻 (Insulation Resistance):	100MΩ 最小值
接触电阻 (Contact Rresistance) :	5mΩ (最初)



名称 (Name):	13P连接器
编码 (Code):	JHB00096(7131-3-10)
金属 (Metal):	黄铜电镀镍锡(Brass Tin)
极数 (Poles):	13* 3.0*0.6mm
原料 (Material):	PA6 GF/UL-94 HB
温度范围 (Temperature):	-40° - 125°
间距 (Pitch):	7.0mm
额定电流 (Current Rating):	15A - 18A
绝缘电阻 (Insulation Resistance):	100MΩ 最小值
接触电阻 (Contact Rresistance) :	5mΩ (最初)




名称 (Name):	17P连接器 (白)
编码 (Code):	JHB00097(7171-3-10)
金属 (Metal):	黄铜电镀镍锡(Brass Tin)
极数 (Poles):	17* 3.0*0.6mm
原料 (Material):	PA6 GF/UL-94 HB
温度范围 (Temperature):	-40° - 125°
间距 (Pitch):	7.0mm
额定电流 (Current Rating):	15A - 18A
绝缘电阻 (Insulation Resistance):	100MΩ 最小值
接触电阻 (Contact Rresistance) :	5mΩ (最初)

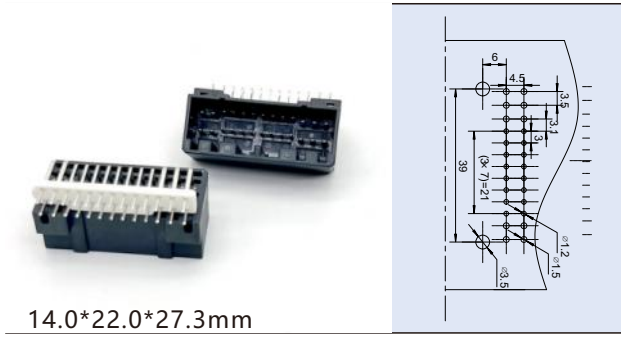


14.0*22.0*27.3mm

名称 (Name):	26P连接器 (灰)
编码 (Code):	JHB00567 (175571-6)
金属 (Metal):	黄铜电镀镍锡(Brass Tin)
极数 (Poles):	10* 1.7*0.6+16* 1.0*0.6mm
原料 (Material):	PBT GF/UL-94 HB
温度范围 (Temperature):	-40° - 125°
间距 (Pitch):	3.0mm/3.5mm
额定电流 (Current Rating):	8A-10A/ 5A-8A
绝缘电阻 (Insulation Resistance):	100MΩ 最小值
接触电阻 (Contact Rresistance) :	5mΩ (最初)

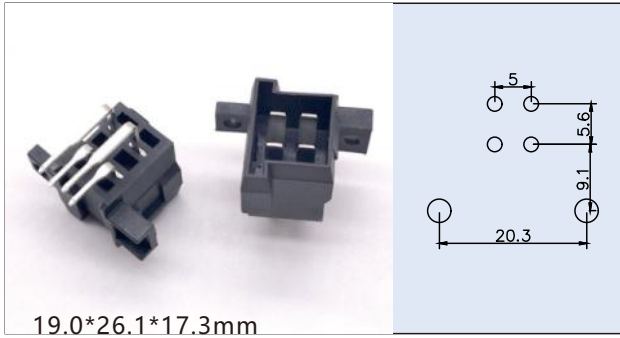


19.0*26.1*17.3mm

名称 (Name):	4P连接器
编码 (Code):	JHB00284(828801-1)
金属 (Metal):	黄铜电镀镍锡(Brass Tin)
极数 (Poles):	4* 3.0*0.8mm
原料 (Material):	PBT GF/UL-94 V0
温度范围 (Temperature):	-40° - 125°
间距 (Pitch):	5.0mm
额定电流 (Current Rating):	20A - 25A
绝缘电阻 (Insulation Resistance):	100MΩ 最小值
接触电阻 (Contact Rresistance) :	5mΩ (最初)

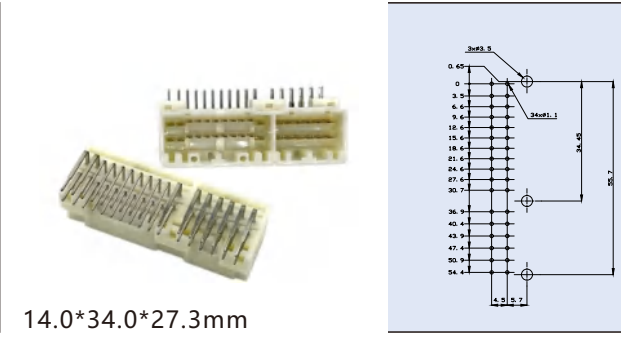


14.0*34.0*27.3mm

名称 (Name):	34P连接器
编码 (Code):	JHB00457(175444-1)
金属 (Metal):	黄铜电镀镍锡(Brass Tin)
极数 (Poles):	18* 1.7*0.6+16* 1.0*0.6mm
原料 (Material):	PBT GF/UL-94 HB
温度范围 (Temperature):	-40° - 125°
间距 (Pitch):	3.0mm/3.5mm
额定电流 (Current Rating):	8A-10A/ 5A-8A
绝缘电阻 (Insulation Resistance):	100MΩ 最小值
接触电阻 (Contact Rresistance) :	5mΩ (最初)

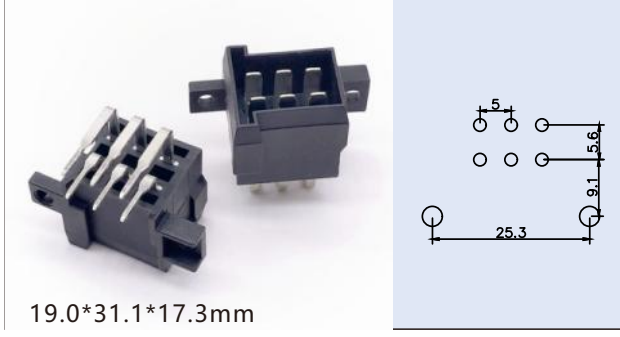


19.0*31.1*17.3mm

名称 (Name):	6P连接器
编码 (Code):	JHB00285(828801-2)
金属 (Metal):	黄铜电镀镍锡(Brass Tin)
极数 (Poles):	6* 3.0*0.8mm
原料 (Material):	PBT GF/UL-94 V0
温度范围 (Temperature):	-40° - 125°
间距 (Pitch):	5.0mm
额定电流 (Current Rating):	20A - 25A
绝缘电阻 (Insulation Resistance):	100MΩ 最小值
接触电阻 (Contact Rresistance) :	5mΩ (最初)

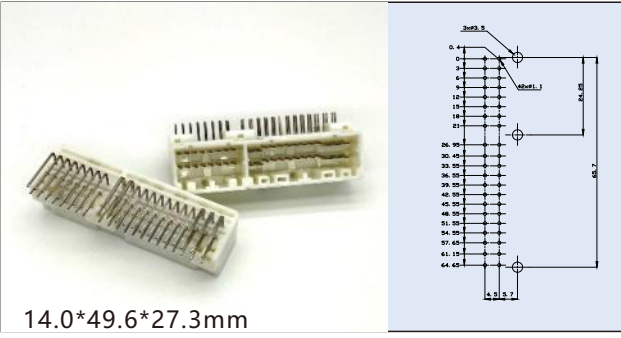


14.0*49.6*27.3mm

名称 (Name):	42P连接器
编码 (Code):	JHB00458(175446-1)
金属 (Metal):	黄铜电镀镍锡(Brass Tin)
极数 (Poles):	10* 1.7*0.6+32* 1.0*0.6mm
原料 (Material):	PBT GF/UL-94 HB
温度范围 (Temperature):	-40° - 125°
间距 (Pitch):	3.0mm/3.5mm
额定电流 (Current Rating):	8A-10A/ 5A-8A
绝缘电阻 (Insulation Resistance):	100MΩ 最小值
接触电阻 (Contact Rresistance) :	5mΩ (最初)

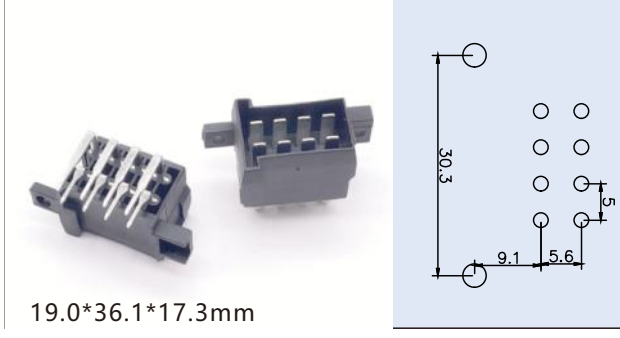


19.0*36.1*17.3mm

名称 (Name):	8P连接器
编码 (Code):	JHB00127(828801-3)
金属 (Metal):	黄铜电镀镍锡(Brass Tin)
极数 (Poles):	8* 3.0*0.8mm
原料 (Material):	PBT GF/UL-94 V0
温度范围 (Temperature):	-40° - 125°
间距 (Pitch):	5.0mm
额定电流 (Current Rating):	20A - 25A
绝缘电阻 (Insulation Resistance):	100MΩ 最小值
接触电阻 (Contact Rresistance) :	5mΩ (最初)

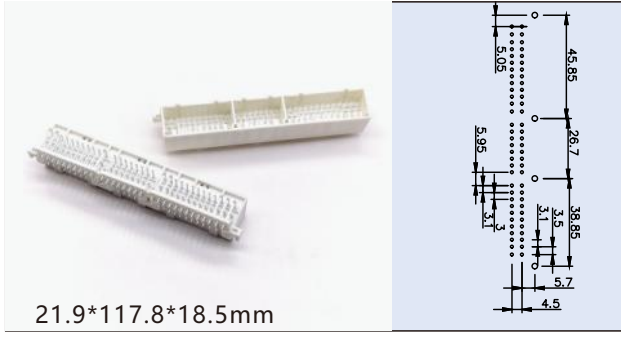


21.9*117.8*18.5mm

名称 (Name):	64P连接器
编码 (Code):	JHB00111(178764-2)
金属 (Metal):	黄铜电镀镍锡(Brass Tin)
极数 (Poles):	16* 1.7*0.6+48* 1.0*0.6mm
原料 (Material):	PBT GF/UL-94 HB
温度范围 (Temperature):	-40° - 125°
间距 (Pitch):	3.0mm/3.5mm
额定电流 (Current Rating):	8A-10A/ 5A-8A
绝缘电阻 (Insulation Resistance):	100MΩ 最小值
接触电阻 (Contact Rresistance) :	5mΩ (最初)

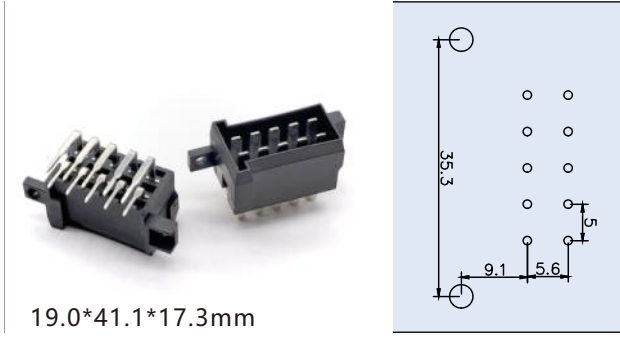


19.0*41.1*17.3mm

名称 (Name):	10P连接器
编码 (Code):	JHB00286(828801-4)
金属 (Metal):	黄铜电镀镍锡(Brass Tin)
极数 (Poles):	10* 3.0*0.8mm
原料 (Material):	PBT GF/UL-94 V0
温度范围 (Temperature):	-40° - 125°
间距 (Pitch):	5.0mm
额定电流 (Current Rating):	20A - 25A
绝缘电阻 (Insulation Resistance):	100MΩ 最小值
接触电阻 (Contact Rresistance) :	5mΩ (最初)

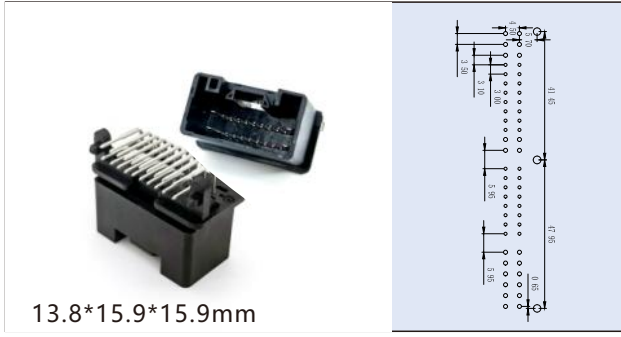

13.8*15.9*15.9mm

名称 (Name):	20P连接器
编码 (Code):	JHB00603
金属 (Metal):	黄铜电镀镍锡(Brass Tin)
极数 (Poles):	4* 1.7*0.6+16* 1.0*0.6mm
原料 (Material):	PBT GF/UL-94 HB
温度范围 (Temperature):	-40° - 125°
间距 (Pitch):	3.2mm/4.35mm
额定电流 (Current Rating):	8A-10A/ 5A-8A
绝缘电阻 (Insulation Resistance):	100MΩ 最小值
接触电阻 (Contact Rresistance) :	5mΩ (最初)

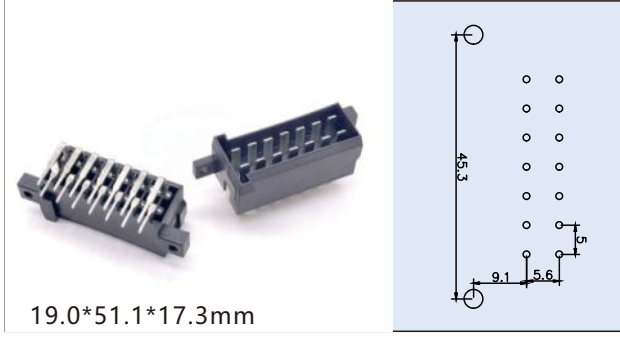


19.0*51.1*17.3mm

名称 (Name):	14P连接器
编码 (Code):	JHB00287(828801-5)
金属 (Metal):	黄铜电镀镍锡(Brass Tin)
极数 (Poles):	14* 3.0*0.8mm
原料 (Material):	PBT GF/UL-94 V0
温度范围 (Temperature):	-40° - 125°
间距 (Pitch):	5.0mm
额定电流 (Current Rating):	20A - 25A
绝缘电阻 (Insulation Resistance):	100MΩ 最小值
接触电阻 (Contact Rresistance) :	5mΩ (最初)




19.0*61.1*17.3mm




名称 (Name):	18P连接器
编码 (Code):	JHB00085(828801-6)
金属 (Metal):	黄铜电镀镍锡(Brass Tin)
极数 (Poles):	18* 3.0*0.8mm
原料 (Material):	PBT GF/UL-94 V0
温度范围 (Temperature):	-40° - 125°
间距 (Pitch):	5.0mm
额定电流 (Current Rating):	20A - 25A
绝缘电阻 (Insulation Resistance):	100MΩ 最小值
接触电阻 (Contact Rresistance) :	5mΩ (最初)



19.0*71.1*17.3mm




名称 (Name):	22P连接器
编码 (Code):	JHB00257(828801-7)
金属 (Metal):	黄铜电镀镍锡(Brass Tin)
极数 (Poles):	22* 3.0*0.8mm
原料 (Material):	PBT GF/UL-94 V0
温度范围 (Temperature):	-40° - 125°
间距 (Pitch):	5.0mm
额定电流 (Current Rating):	20A - 25A
绝缘电阻 (Insulation Resistance):	100MΩ 最小值
接触电阻 (Contact Rresistance) :	5mΩ (最初)



名称 (Name):	11P连接器
编码 (Code):	JHB00561
金属 (Metal):	黄铜电镀镍锡(Brass Tin)
极数 (Poles):	11* 2.8*0.8mm
原料 (Material):	PA66 GF/UL-94 V0
温度范围 (Temperature):	-40° - 125°
间距 (Pitch):	5.0mm
额定电流 (Current Rating):	20A - 25A
绝缘电阻 (Insulation Resistance):	100MΩ 最小值
接触电阻 (Contact Rresistance) :	5mΩ (最初)




20.0*61.1*18.3mm



名称 (Name):	4P连接器
编码 (Code):	JHB00452(963357-6)
金属 (Metal):	黄铜电镀镍锡(Brass Tin)
极数 (Poles):	4* 3.0*0.8mm
原料 (Material):	PBT GF/UL-94 HB
温度范围 (Temperature):	-40° - 125°
间距 (Pitch):	5.0mm
额定电流 (Current Rating):	20A - 25A
绝缘电阻 (Insulation Resistance):	100MΩ 最小值
接触电阻 (Contact Rresistance) :	5mΩ (最初)




20.0*71.1*18.3mm



名称 (Name):	6P连接器
编码 (Code):	JHB00165(963357-5)
金属 (Metal):	黄铜电镀镍锡(Brass Tin)
极数 (Poles):	6* 3.0*0.8mm
原料 (Material):	PBT GF/UL-94 HB
温度范围 (Temperature):	-40° - 125°
间距 (Pitch):	5.0mm
额定电流 (Current Rating):	20A - 25A
绝缘电阻 (Insulation Resistance):	100MΩ 最小值
接触电阻 (Contact Rresistance) :	5mΩ (最初)




20.0*61.1*18.3mm



名称 (Name):	10P连接器
编码 (Code):	JHB00256(963357-4)
金属 (Metal):	黄铜电镀镍锡(Brass Tin)
极数 (Poles):	10* 3.0*0.8mm
原料 (Material):	PBT GF/UL-94 HB
温度范围 (Temperature):	-40° - 125°
间距 (Pitch):	5.0mm
额定电流 (Current Rating):	20A - 25A
绝缘电阻 (Insulation Resistance):	100MΩ 最小值
接触电阻 (Contact Rresistance) :	5mΩ (最初)




20.0*71.1*18.3mm



名称 (Name):	14P连接器
编码 (Code):	JHB00228(963357-3)
金属 (Metal):	黄铜电镀镍锡(Brass Tin)
极数 (Poles):	14* 3.0*0.8mm
原料 (Material):	PBT GF/UL-94 HB
温度范围 (Temperature):	-40° - 125°
间距 (Pitch):	5.0mm
额定电流 (Current Rating):	20A - 25A
绝缘电阻 (Insulation Resistance):	100MΩ 最小值
接触电阻 (Contact Rresistance) :	5mΩ (最初)




20.0*61.1*18.3mm




名称 (Name):	18P连接器
编码 (Code):	JHB00002(963357-2)
金属 (Metal):	黄铜电镀镍锡(Brass Tin)
极数 (Poles):	18* 3.0*0.8mm
原料 (Material):	PBT GF/UL-94 HB
温度范围 (Temperature):	-40° - 125°
间距 (Pitch):	5.0mm
额定电流 (Current Rating):	20A - 25A
绝缘电阻 (Insulation Resistance):	100MΩ 最小值
接触电阻 (Contact Rresistance) :	5mΩ (最初)



20.0*71.1*18.3mm




名称 (Name):	22P连接器
编码 (Code):	JHB00010(963357-1)
金属 (Metal):	黄铜电镀镍锡(Brass Tin)
极数 (Poles):	22* 3.0*0.8mm
原料 (Material):	PBT GF/UL-94 HB
温度范围 (Temperature):	-40° - 125°
间距 (Pitch):	5.0mm
额定电流 (Current Rating):	20A - 25A
绝缘电阻 (Insulation Resistance):	100MΩ 最小值
接触电阻 (Contact Rresistance) :	5mΩ (最初)




名称 (Name):	6P连接器
编码 (Code):	JHB00359(966140-5)
金属 (Metal):	黄铜电镀镍锡(Brass Tin)
极数 (Poles):	6* 3.0*0.8mm
原料 (Material):	PA66 GF/UL-94 V0
温度范围 (Temperature):	-40° - 125°
间距 (Pitch):	5.0mm
额定电流 (Current Rating):	20A - 25A
绝缘电阻 (Insulation Resistance):	100MΩ 最小值
接触电阻 (Contact Rresistance) :	5mΩ (最初)






名称 (Name):	9P连接器
编码 (Code):	JHB00112(966140-4)
金属 (Metal):	黄铜电镀镍锡(Brass Tin)
极数 (Poles):	9* 3.0*0.8mm
原料 (Material):	PA66 GF/UL-94 V0
温度范围 (Temperature):	-40° - 125°
间距 (Pitch):	5.0mm
额定电流 (Current Rating):	20A - 25A
绝缘电阻 (Insulation Resistance):	100MΩ 最小值
接触电阻 (Contact Rresistance) :	5mΩ (最初)






名称 (Name):	12P连接器
编码 (Code):	JHB00315(966140-3)
金属 (Metal):	黄铜电镀镍锡(Brass Tin)
极数 (Poles):	12* 3.0*0.8mm
原料 (Material):	PA66 GF/UL-94 V0
温度范围 (Temperature):	-40° - 125°
间距 (Pitch):	5.0mm
额定电流 (Current Rating):	20A - 25A
绝缘电阻 (Insulation Resistance):	100MΩ 最小值
接触电阻 (Contact Rresistance) :	5mΩ (最初)






名称 (Name):	15P连接器
编码 (Code):	JHB00314(966140-2)
金属 (Metal):	黄铜电镀镍锡(Brass Tin)
极数 (Poles):	15* 3.0*0.8mm
原料 (Material):	PA66 GF/UL-94 V0
温度范围 (Temperature):	-40° - 125°
间距 (Pitch):	5.0mm
额定电流 (Current Rating):	20A - 25A
绝缘电阻 (Insulation Resistance):	100MΩ 最小值
接触电阻 (Contact Rresistance) :	5mΩ (最初)






名称 (Name):	18P连接器
编码 (Code):	JHB00316(966140-1)
金属 (Metal):	黄铜电镀镍锡(Brass Tin)
极数 (Poles):	18* 3.0*0.8mm
原料 (Material):	PA66 GF/UL-94 V0
温度范围 (Temperature):	-40° - 125°
间距 (Pitch):	5.0mm
额定电流 (Current Rating):	20A - 25A
绝缘电阻 (Insulation Resistance):	100MΩ 最小值
接触电阻 (Contact Rresistance) :	5mΩ (最初)






名称 (Name):	21P连接器
编码 (Code):	JHB00317(966140-6)
金属 (Metal):	黄铜电镀镍锡(Brass Tin)
极数 (Poles):	21* 3.0*0.8mm
原料 (Material):	PA66 GF/UL-94 V0
温度范围 (Temperature):	-40° - 125°
间距 (Pitch):	5.0mm
额定电流 (Current Rating):	20A - 25A
绝缘电阻 (Insulation Resistance):	100MΩ 最小值
接触电阻 (Contact Rresistance) :	5mΩ (最初)






名称 (Name):	8P连接器
编码 (Code):	JHB00505(1456468-1)
金属 (Metal):	黄铜电镀镍锡(Brass Tin)
极数 (Poles):	4* 0.64+4*2.3*0.6mm
原料 (Material):	PA66 GF/UL-94 V0
温度范围 (Temperature):	-40° - 125°
间距 (Pitch):	2.54mm
额定电流 (Current Rating):	2A /8A
绝缘电阻 (Insulation Resistance):	100MΩ 最小值
接触电阻 (Contact Rresistance) :	5mΩ (最初)






名称 (Name):	4P连接器 (白)
编码 (Code):	JHB00583
金属 (Metal):	黄铜电镀镍锡(Brass Tin)
极数 (Poles):	2* 6.3*0.8+2*2.8*0.8mm
原料 (Material):	PBT GF/UL-94 HB
温度范围 (Temperature):	-40° - 125°
间距 (Pitch):	3.75/2.75mm
额定电流 (Current Rating):	10A - 12A
绝缘电阻 (Insulation Resistance):	100MΩ 最小值
接触电阻 (Contact Rresistance) :	5mΩ (最初)






名称 (Name):	14P连接器 (白)
编码 (Code):	JHB00094(MG642868)
金属 (Metal):	黄铜电镀镍锡(Brass Tin)
极数 (Poles):	14* 2.2*0.6mm
原料 (Material):	PBT GF/UL-94 HB
温度范围 (Temperature):	-40° - 125°
间距 (Pitch):	4.0mm
额定电流 (Current Rating):	10A - 12A
绝缘电阻 (Insulation Resistance):	100MΩ 最小值
接触电阻 (Contact Rresistance) :	5mΩ (最初)






名称 (Name):	23P连接器
编码 (Code):	JHB00039(6098-3572)
金属 (Metal):	黄铜电镀镍锡(Brass Tin)
极数 (Poles):	4* 2.3*0.6+19* 1.0*0.6mm
原料 (Material):	PBT GF/UL-94 HB
温度范围 (Temperature):	-40° - 125°
间距 (Pitch):	2.4mm/3.5mm
额定电流 (Current Rating):	10A-12A/ 5A-8A
绝缘电阻 (Insulation Resistance):	100MΩ 最小值
接触电阻 (Contact Rresistance) :	5mΩ (最初)






名称 (Name):	20P连接器
编码 (Code):	JHB00108
金属 (Metal):	黄铜电镀镍锡(Brass Tin)
极数 (Poles):	6* 2.2*0.6+14* 1.0*0.6mm
原料 (Material):	PBT GF/UL-94 HB
温度范围 (Temperature):	-40° - 125°
间距 (Pitch):	2.54mm
适配说明 (Pitch):	1: 适配锐志/普拉多玻璃升降控制模块 2: 适用于汽车后装维修市场 3: 无匹配线端连接器及端子



 16.5*46.0*21.6mm		名称 (Name):	22P连接器
		编码 (Code):	JHB00126
		金属 (Metal):	黄铜电镀镍锡(Brass Tin)
		极数 (Poles):	22
		原料 (Material):	ABS
		温度范围 (Temperature):	-30° - 80°
		间距 (Pitch):	3.0mm
		适配说明 (Pitch):	1: 适配本田思域玻璃升降控制模块 2: 适用于汽车后装维修市场 3: 无匹配线端连接器及端子





25.3*40.0*20.0mm



名称 (Name):	24P连接器
编码 (Code):	JHB00070
金属 (Metal):	黄铜电镀镍锡(Brass Tin)
极数 (Poles):	24
原料 (Material):	ABS
温度范围 (Temperature):	-30° - 80°
间距 (Pitch):	3.4mm
适配说明 (Pitch):	1: 适配本田CRV玻璃升降控制模块 2: 适用于汽车后装维修市场 3: 无匹配线端连接器及端子

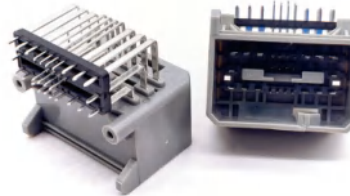		名称 (Name):	26P连接器
		编码 (Code):	JHB00124
32.1*41.4*25.0mm		金属 (Metal):	黄铜电镀镍锡(Brass Tin)
		极数 (Poles):	26
		原料 (Material):	ABS
		温度范围 (Temperature):	-30° - 80°
		间距 (Pitch):	2.2mm
		适配说明 (Pitch):	1: 适配本田思域玻璃升降控制模块 2: 适用于汽车后装维修市场 3: 无匹配线端连接器及端子


		名称 (Name):	37P连接器
		编码 (Code):	JHB00224
45.8*42.0*30.9mm		金属 (Metal):	黄铜电镀镍锡(Brass Tin)
		极数 (Poles):	37
		原料 (Material):	ABS
		温度范围 (Temperature):	-30° - 80°
		间距 (Pitch):	2.2mm
适配说明 (Pitch):		1: 适配八代雅阁玻璃升降控制模块 2: 适用于汽车后装维修市场 3: 无匹配线端连接器及端子	

		名称 (Name):	37P连接器
		编码 (Code):	JHB00064
		金属 (Metal):	黄铜电镀镍锡(Brass Tin)
		极数 (Poles):	37
		原料 (Material):	ABS
		温度范围 (Temperature):	-30° - 80°
		间距 (Pitch):	2.2mm
适配说明 (Pitch):		1: 适配十代雅阁玻璃升降控制模块 2: 适用于汽车后装维修市场 3: 无匹配线端连接器及端子	

25.5*42.0*22.3mm




28.0*65.6*19.3mm



名称 (Name):	13P连接器
编码 (Code):	JHB00048
金属 (Metal):	黄铜电镀镍锡(Brass Tin)
极数 (Poles):	13* 3.0*0.6mm
原料 (Material):	ABS/UL-94 V0
温度范围 (Temperature):	-30° - 80°
间距 (Pitch):	5.0mm
额定电流 (Current Rating):	15A - 18A
绝缘电阻 (Insulation Resistance):	100MΩ 最小值
接触电阻 (Contact Rresistance) :	5mΩ (最初)




15.8*33.5*14.6mm




名称 (Name):	14P连接器
编码 (Code):	JHB00086(三合一)
金属 (Metal):	黄铜电镀镍锡(Brass Tin)
极数 (Poles):	6* 1.8*0.6+8* 1.0*0.6mm
原料 (Material):	PA6/UL-94 HB
温度范围 (Temperature):	-30° - 125°
间距 (Pitch):	2.5mm/3.5mm
额定电流 (Current Rating):	8A - 10A/5A - 8A
绝缘电阻 (Insulation Resistance):	100MΩ 最小值
接触电阻 (Contact Rresistance) :	5mΩ (最初)



28.3*73.0*20.5mm




名称 (Name):	16P连接器
编码 (Code):	JHB00040(二合一)
金属 (Metal):	黄铜电镀镍锡(Brass Tin)
极数 (Poles):	16* 2.3*0.6mm
原料 (Material):	PA6/UL-94 V0
温度范围 (Temperature):	-30° - 125°
间距 (Pitch):	4.0mm
额定电流 (Current Rating):	13A - 15A
绝缘电阻 (Insulation Resistance):	100MΩ 最小值
接触电阻 (Contact Rresistance) :	5mΩ (最初)











		名称 (Name):	18P连接器
		编码 (Code):	JHB00140(加长二合一)
		金属 (Metal):	黄铜电镀镍锡(Brass Tin)
		极数 (Poles):	18* 2.3*0.6mm
		原料 (Material):	ABS GF/UL-94 V0
		温度范围 (Temperature):	-30° - 80°
		间距 (Pitch):	4.0mm
		额定电流 (Current Rating):	13A - 15A
		绝缘电阻 (Insulation Resistance):	100MΩ 最小值
28.3*73.0*20.5mm		接触电阻 (Contact Rresistance) :	5mΩ (最初)



24.6*72.0*24.8mm



名称 (Name):	22P连接器
编码 (Code):	JHB00028
金属 (Metal):	黄铜电镀镍锡(Brass Tin)
极数 (Poles):	16* 3.0*0.6+6* 1.0*0.6mm
原料 (Material):	PA66 GF/UL-94 V0
温度范围 (Temperature):	-40° - 125°
间距 (Pitch):	2.5mm/5.0mm
额定电流 (Current Rating):	15A - 18A/5A-8A
绝缘电阻 (Insulation Resistance):	100MΩ 最小值
接触电阻 (Contact Rresistance) :	5mΩ (最初)

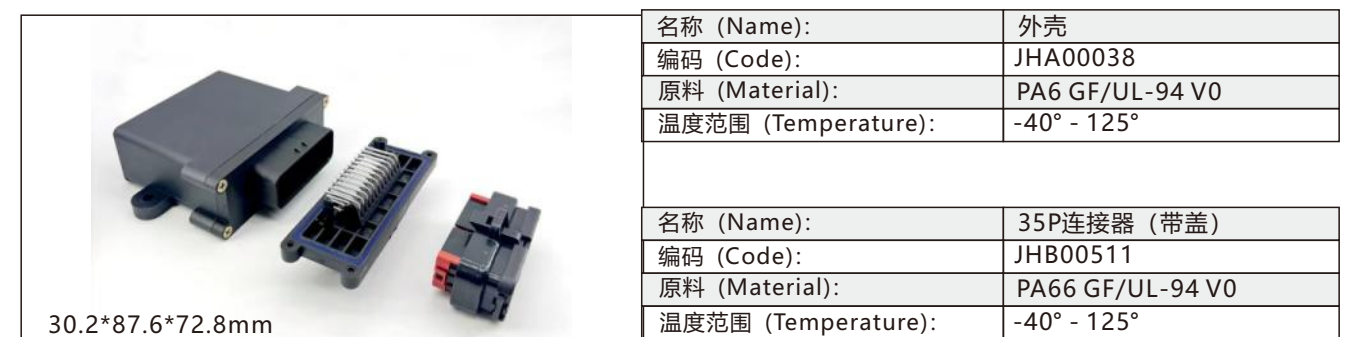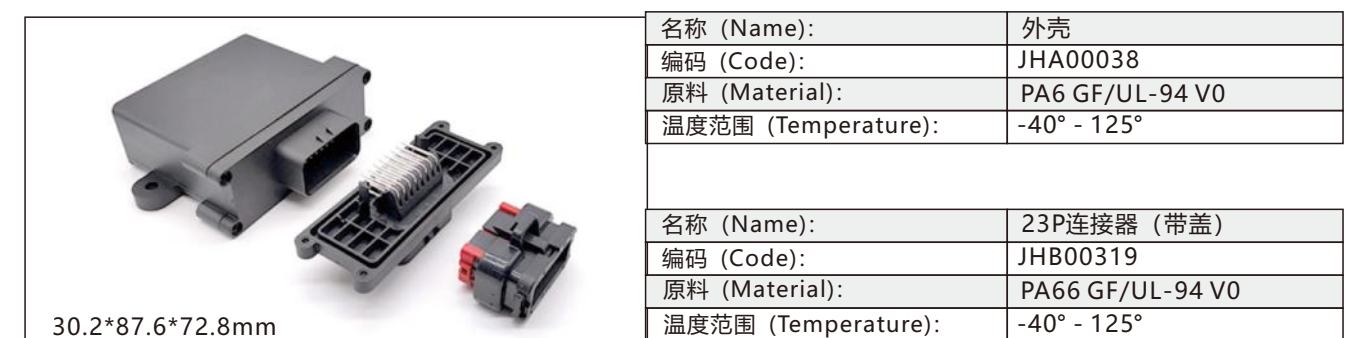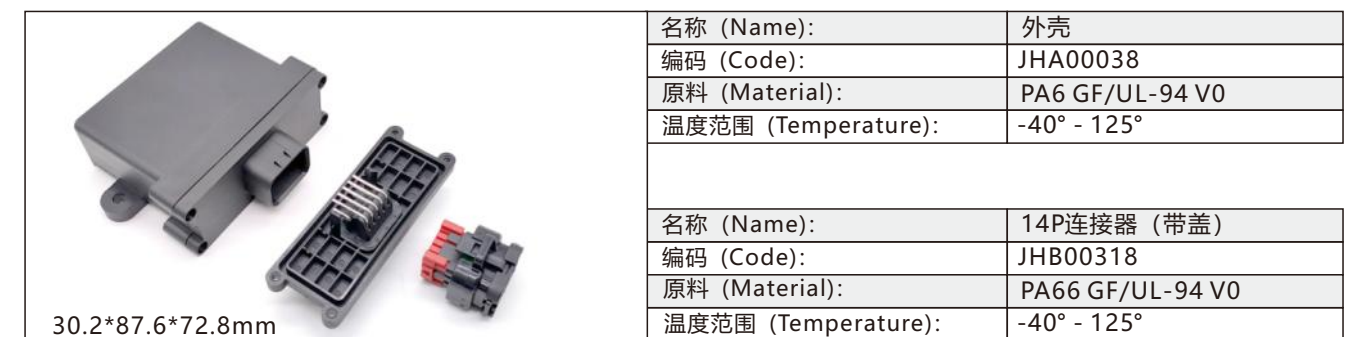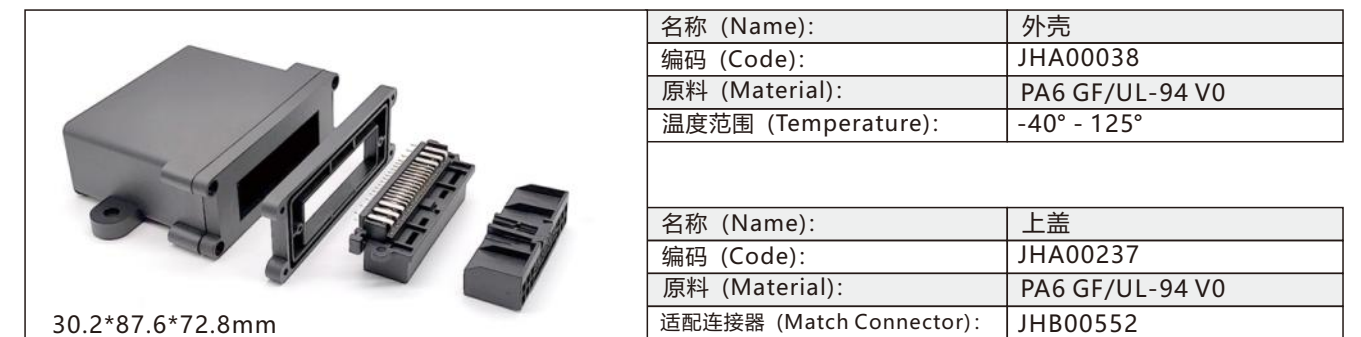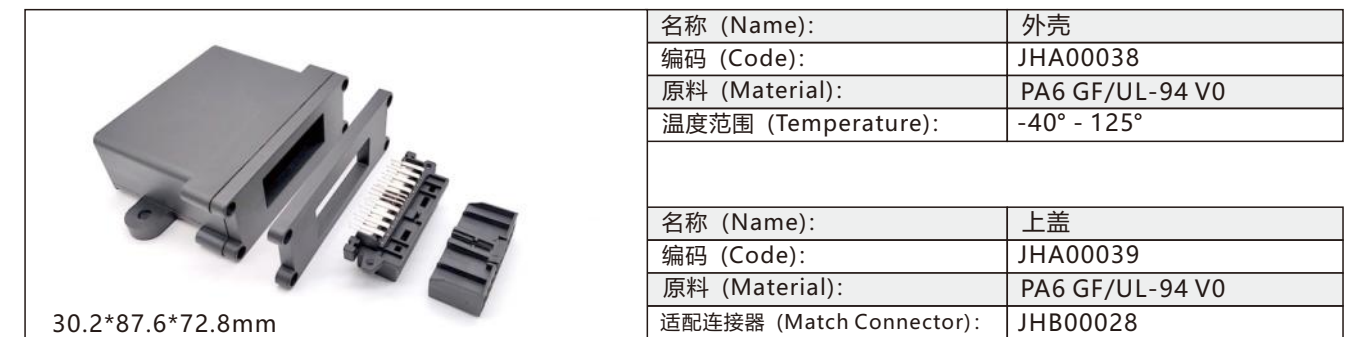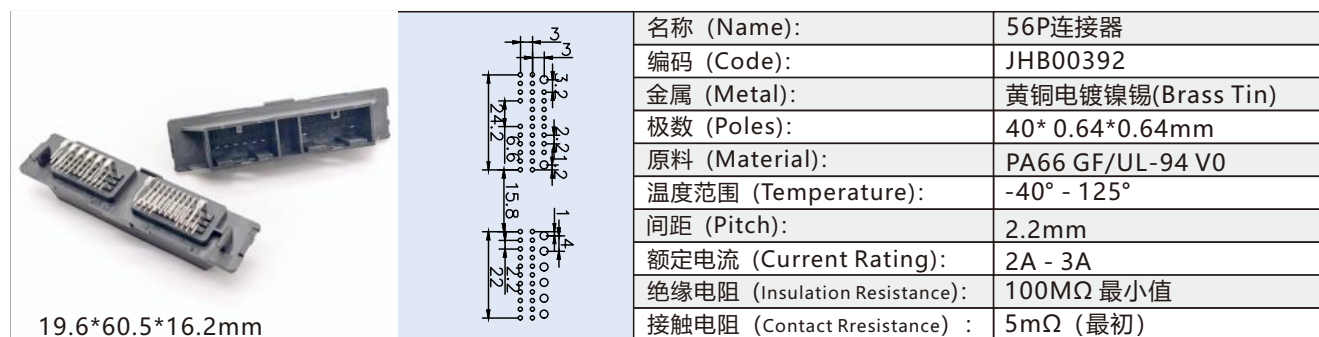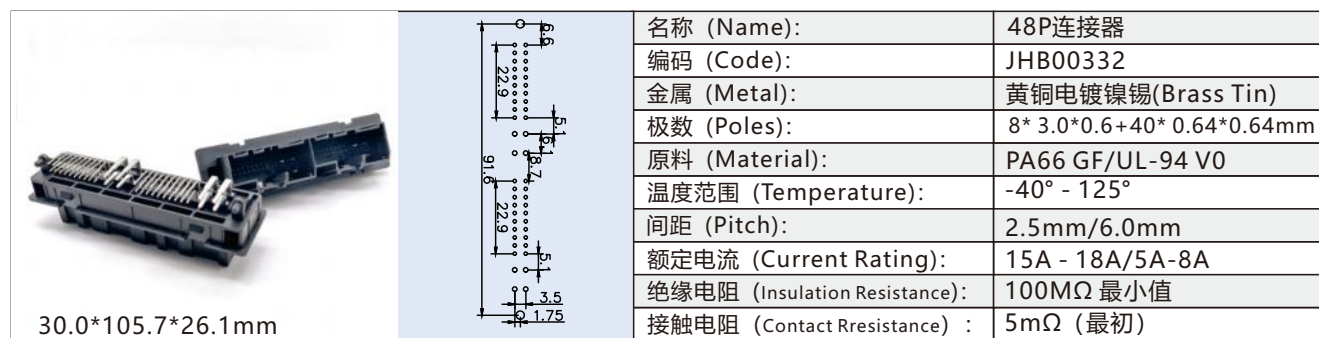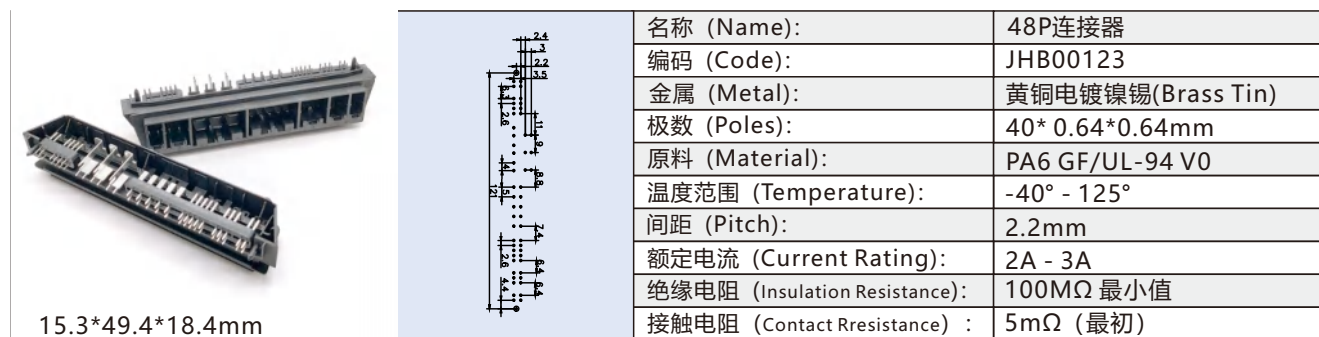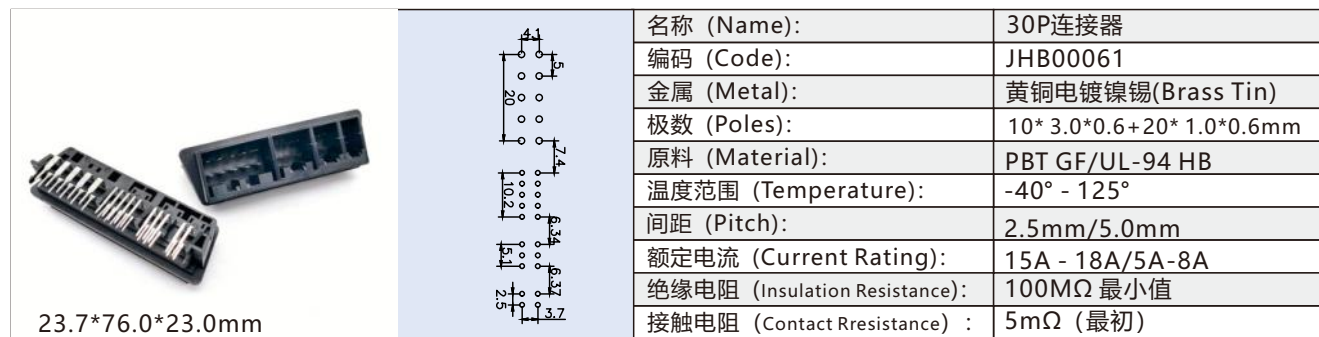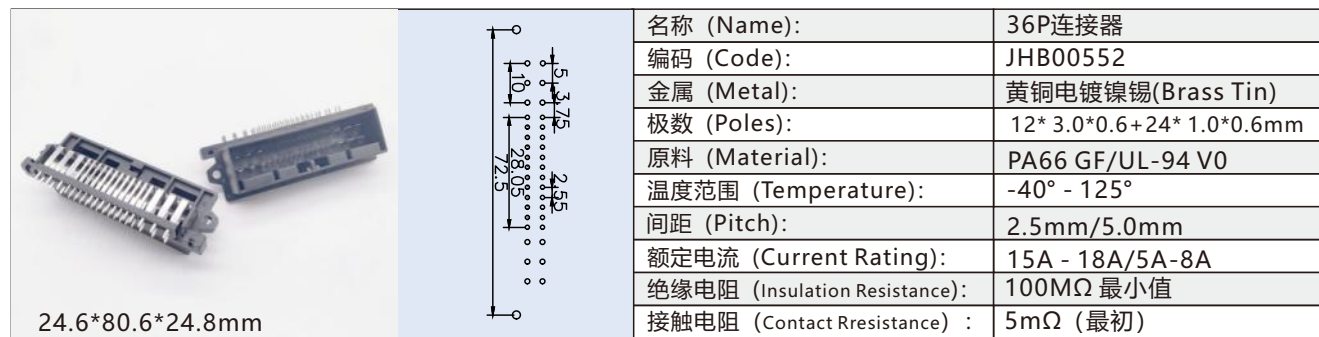

 74.2*127*24.0mm	名称 (Name):	踏步机外壳
	编码 (Code):	JHA00370
	原料 (Material):	PA6 GF/UL-94 V0
	温度范围 (Temperature):	-40° - 125°
	名称 (Name):	上盖
	编码 (Code):	JHA00371
	原料 (Material):	PA6 GF/UL-94 V0
	适配连接器 (Match Connector):	Pg接头出口

 85.5*196*36mm	名称 (Name):	外壳
	编码 (Code):	JHA00270
	原料 (Material):	PA6 GF/UL-94 V0
	温度范围 (Temperature):	-40° - 125°
	名称 (Name):	上盖
	编码 (Code):	JHA00271
	原料 (Material):	PA6 GF/UL-94 V0
	适配连接器 (Match Connector):	JHB00045/JHB00046/JHB00047

 31.8*158*83.0mm	名称 (Name):	外壳
	编码 (Code):	JHA00127
	原料 (Material):	ABS/UL-94 V0
	温度范围 (Temperature):	-30° - 150°
	名称 (Name):	上盖
	编码 (Code):	JHA00128
	原料 (Material):	ABS/UL-94 V0
	适配连接器 (Match Connector):	JHB00552

 27.4*67.6*48.5mm	名称 (Name):	外壳
	编码 (Code):	JHA00105
	原料 (Material):	PA6 GF/UL-94 V0
	温度范围 (Temperature):	-30° - 150°
	名称 (Name):	上盖
	编码 (Code):	JHA00239
	原料 (Material):	PA6 GF/UL-94 V0
	适配连接器 (Match Connector):	JHB00086

 27.4*67.6*48.5mm	名称 (Name):	外壳
	编码 (Code):	JHA00105
	原料 (Material):	PA6 GF/UL-94 V0
	温度范围 (Temperature):	-30° - 125°
	名称 (Name):	16P连接器
	编码 (Code):	JHB00040
	原料 (Material):	PA6 GF/UL-94 V0
	温度范围 (Temperature):	-30° - 125°

 28.0*66.0*78.0mm	名称 (Name):	外壳
	编码 (Code):	JHA00087
	原料 (Material):	ABS/UL-94 V0
	温度范围 (Temperature):	-30° - 80°
	名称 (Name):	13P连接器
	编码 (Code):	JHB00048
	原料 (Material):	ABS/UL-94 V0
	适配连接器 (Match Connector):	JHA00262

 68.3*103.8*27.7mm	名称 (Name):	外壳
	编码 (Code):	JHA00180
	原料 (Material):	PA6 GF/UL-94 V0
	温度范围 (Temperature):	-40° - 125°
	名称 (Name):	上盖
	编码 (Code):	JHA00181
	原料 (Material):	Pa66 GF/UL-94 V0
	适配连接器 (Match Connector):	28P连接器


 127*120*36.0mm	名称 (Name):	外壳
	编码 (Code):	JHA00233
	原料 (Material):	ABS/UL-94 V0
	温度范围 (Temperature):	-40° - 125°
	名称 (Name):	上盖
	编码 (Code):	JHA00234
	原料 (Material):	ABS/UL-94 V0
	适配连接器 (Match Connector):	34P连接器

 100*130*36.0mm	名称 (Name):	上盖
	编码 (Code):	JHA00034
	原料 (Material):	ABS/PC-UL-94 V0
	温度范围 (Temperature):	-30° - 105°
	名称 (Name):	下盖
	编码 (Code):	JHA00035
	原料 (Material):	ABS/PC-UL-94 V0
	适配连接器 (Match Connector):	JHB00104/JHB00137

 165*150*28.1mm	名称 (Name):	上盖+主体
	编码 (Code):	JHA00415+JHA00416
	原料 (Material):	Pa66 GF/UL-94 V0
	温度范围 (Temperature):	-40° - 125°
	适配连接器 (Match Connector):	22P连接器 (JHB00349)
	适配连接器 (Match Connector):	24P连接器 (JHB00350)
	适配连接器 (Match Connector):	32P连接器 (JHB00351)
	适配连接器 (Match Connector):	48P连接器 (JHB00352)

河南金华电气有限公司
电话：18803921718（微信同号）
邮箱：18803921718@163.com
网址：www.hnjhdq.com
工厂地址：河南省鹤壁市山城区铁东路

金华电气深圳分公司
电话：13631516650（微信同号）
邮箱：tw13631516650@163.com
地址：深圳市龙华区龙华大道昌龙路鸿宇大厦932



汽车连接器产品目录

AUTOMOTIVE CONNECTOR PRODUCT CATALOG



公司简介
ENTERPRISE
INTRODUCTION

产 品 目 录
PRODUCT CATALOG

河南金华电气有限公司(原鹤壁市天万电子有限公司，成立于2012年)位于河南省鹤壁市山城区铁东路。是一家专业从事汽车连接器、接插件、汽车线束、汽车配件等研发、生产和销售的现代化企业公司。

金华电气致力于自主创新，被评为“国家科技型中小型企业”，已获授权22项国家专利技术（汽车连接器方向）；同时重视产品质量和环境保护，通过IATF16949质量管理体系和ISO14001环境管理体系。

金华电气有员工100余名，生产车间约10000平方米，拥有自动化注塑生产车间，全自动插装装配车间。生产设备有海天牌精密数控注塑机、全自动插装生产线，全自动数控压接机、半自动压接设备和精密模具、夹具等。同时拥有数控机床、中走丝、电火花、数控磨床等模具加工设备，以及高低温试验箱、盐雾试验箱、燃烧试验箱、二次元测试仪、数控拉力计、冲击强度测试箱、防水试验箱、微电阻测试仪、电流测试仪等检测设备。金华电气生产的精密连接器、端子、护套、线束等系列产品，广泛应用在一汽红旗、理想汽车、东风汽车、吉利汽车、长安汽车、长城汽车、福田汽车、江淮、重汽、陕汽、徐工等国内知名品牌，并出口东南亚、中东及欧美等国。

金华电气在未来将继续以实现客户的满意和成功为目标，致力于为客户提供高品质的产品和服务，为中国汽车连接器的创新与腾飞做出应有的贡献！

Henan Jinhua Electric Co., Ltd. (formerly Hebi Tianwan Electronics Co., Ltd., established in 2012) is located in Tiedong Road, Shancheng District, Hebi City, Henan Province. It is a modern enterprise company specializing in the R & D, production and sales of automobile connectors, connectors, automobile harnesses and auto parts.

Jinhua Electric is committed to independent innovation, has been rated as "National Science and technology-based small and medium-sized enterprise", and has been authorized 15 national patent technologies (automobile connector direction); At the same time, pay attention to product quality and environmental protection, and pass iatf16949 quality management system and ISO14001 environmental management system.

Jinhua Electric has more than 100 employees, 13000 square meters of production workshop, automatic injection molding production workshop and automatic plug-in assembly workshop. Production equipment includes Haitian brand precision CNC injection molding machine, full-automatic insertion production line, full-automatic CNC crimping machine, semi-automatic crimping equipment, precision molds and fixtures, etc. At the same time, it has CNC machine tools, medium wire walking, EDM, CNC grinder and other mold processing equipment, as well as high and low temperature test chamber, salt spray test chamber, combustion test chamber, secondary element tester, CNC tension meter, impact strength test chamber, waterproof test chamber, micro resistance tester, current tester and other testing equipment. The precision connectors, terminals, sheaths, wire harnesses and other products produced by Jinhua Electric are widely used in domestic well-known brands such as FAW Hongqi, Dongfeng Motor, Geely motor, Chang'an Motor, Great Wall Motor, Futian motor, JAC, heavy truck, Shaanxi Auto, XCMG, and exported to Southeast Asia, the Middle East, Europe and the United States.

Jinhua Electric will continue to take customer satisfaction and success as the goal in the future, devote itself to providing customers with high-quality products and services, and make due contributions to the innovation and take-off of China's automobile connectors!

01 / 02	企业简介/目录 Company Profile/Catalogue
03 / 04	产品研发/企业荣誉 Product Research/ Honor
05 / 06	质量控制 Quality Control
07 / 08	产品应用 Application Case
09 / 18	防水板端连接器 Waterproof Connectors
19 / 21	064板端连接器 064 Pcb Header Connectors
22 / 24	简易排插/1.0板端连接器 1.0 Pcb Header Connectors
25 / 34	1.8/3.0板端连接器 1.8/3.0 Header Connectors
35 / 36	玻璃升降控制模块板端连接器 Glass Lifter Connectors
37 / 38	定制板端连接器 Custom Header Connectors
39 / 40	定制塑胶外壳 Custom Plastic Shell

应用案例


APPLICATION CASE

汽车产品配套说明

Description of car products

金华电气属于汽车产业链的二级或三级配套供应商。生产的产品并不直接供应给汽车工厂，而是组装在客户（多为生产汽车电子产品，控制模组产品的厂商）产品上，销售给以下客户。

inhua Electric is a secondary or tertiary supporting supplier in the automotive industry chain. The products produced are not directly supplied to automobile factories, but are assembled on the products of customers (mostly manufacturers of automotive electronic products and control module products) and sold to the following customers.

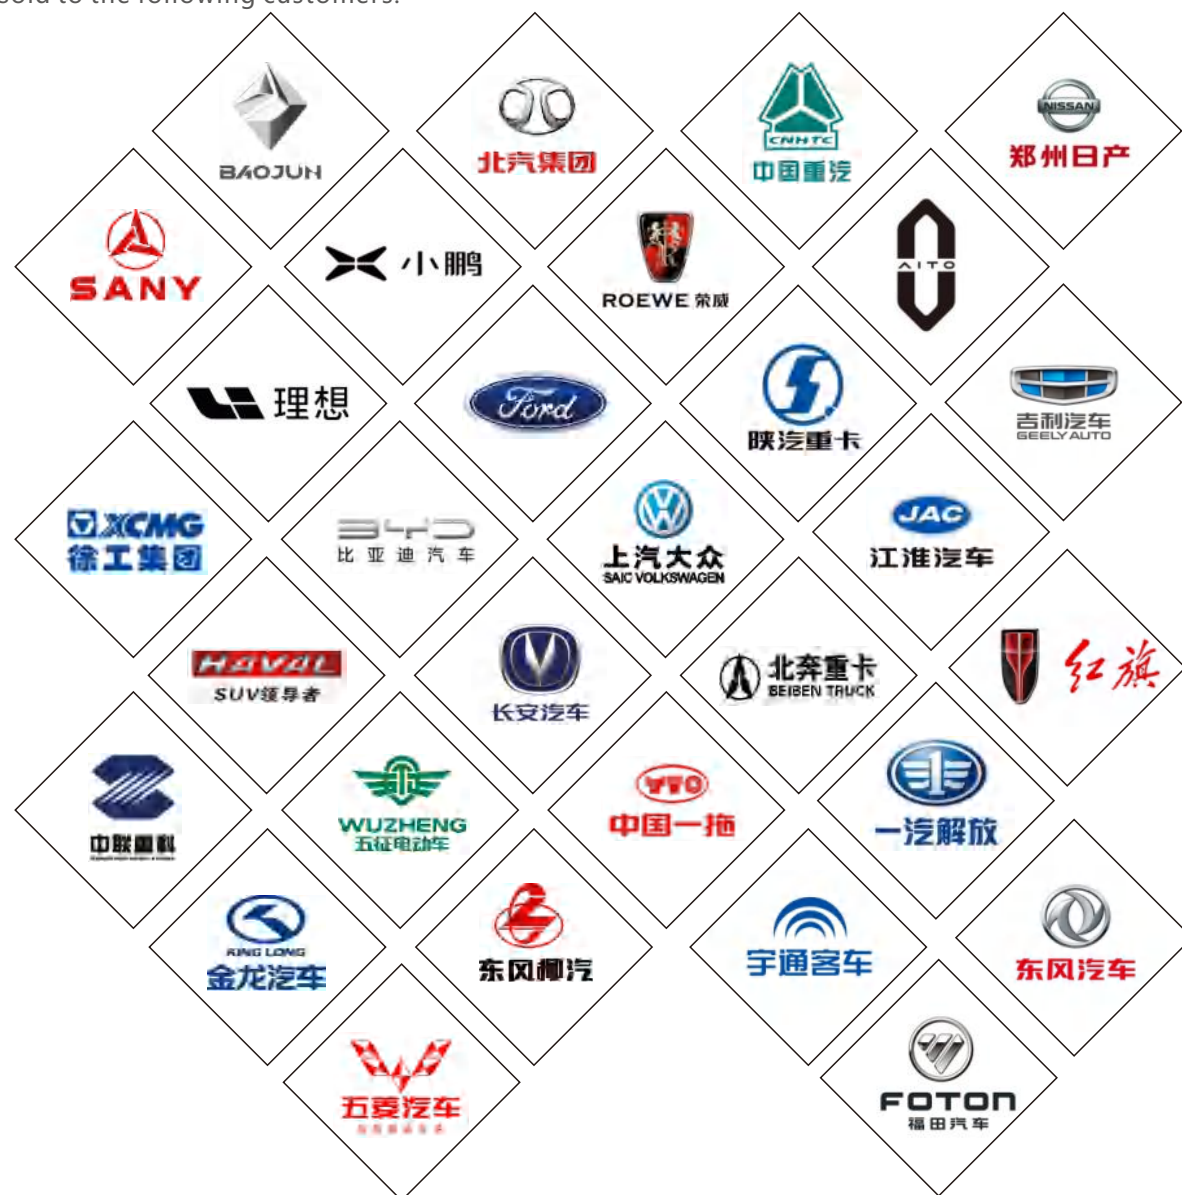

公司专利荣誉

COMPANY PATENT HONOR





国家认可的CNAS实验室 模具 冲压 注塑 装配 全工序工厂



模具车间 Die shop

金华电气投资的模具车间均为国际或国内知名品牌设备，拥有慢丝线切割机，电火花机、加工中心、高精度磨床等，可以完成从模具的设计、模流分析、制造、调试等全工序。
The mold workshops invested by Jinhua Electric are all internationally or domestically renowned brand equipment, equipped with slow wire cutting machines, electric discharge machines, machining centers, high-precision grinders, etc., which can complete the entire process from mold design, mold flow analysis, manufacturing, debugging, etc.



金华电气投资的冲压车间均为全自动冲床。可以完成金属端子的冲压，在线检测，计数等功能。给客户交付电镀完成的金属端子。
The stamping workshops invested by Jinhua Electric are all fully automatic punching machines. It can complete functions such as stamping, online detection, and counting of metal terminals. Deliver electroplated metal terminals to customers.



冲压车间 Stamping Workshop



注塑车间 Injection Molding Workshop

金华电气的注塑车间为海天注塑机，配以全自动机械手、三位一体烘干除湿机。使用国际知名品牌塑胶颗粒，按照IATF16949质量体系运行.保证质量。
Jinhua Electric's injection molding workshop uses Haitian injection molding machines, equipped with fully automatic robotic arms and a three in one drying and dehumidification machine. Use internationally renowned brand plastic pellets and operate according to the IATF16949 quality system to ensure quality.



金华电气的装配车间为封闭式洁净车间。拥有全自动生产线、半自动电动/气动生产线和手动生产线。符合日均产能5万套汽车连接器的产能要求。
The assembly workshop of Jinhua Electric is a closed clean workshop. We have fully automated production lines, semi-automatic electric/pneumatic production lines, and manual production lines. Meet the production capacity requirement of 50000 sets of automotive connectors per day.



装配车间 assembling shop



国家认可的CNAS实验室 CNAS laboratories accredited by the state

金华电气投资的第三方实验室拥有CMA和CNAS双证。实验室可以为汽车连接器、汽车线束、汽车保险丝盒等产品的出具机械试验、电子性能实验、复合环境实验等项目的实验报告。
The third-party laboratory invested by Jinhua Electric has both CMA and CNAS certifications. The laboratory can provide experimental reports for mechanical testing, electronic performance testing, composite environment testing, and other projects related to automotive connectors, automotive wiring harnesses, automotive fuse boxes, and other products.



Contact: Mandy

Email number:

lqm849538848@gmail.com