



防水连接器 WATERPROOF CONNECTORS




		名称 (Name):	8P连接器
		编码 (Code):	JHB00280(776280-1)
		金属 (Metal):	黄铜电镀镍锡(Brass Tin)
		极数 (Poles):	8* Φ1.3mm
		原料 (Material):	PBT GF/UL-94 V0
		温度范围 (Temperature):	-40° - 125°
		间距 (Pitch):	4.0mm
		额定电流 (Current Rating):	10A - 15A
		绝缘电阻 (Insulation Resistance):	100MΩ 最小值
		接触电阻 (Contact Resistance):	5mΩ (最初)


32.1*40.8*37.8mm

		名称 (Name):	14P连接器
		编码 (Code):	JHB00281(776267-1)
		金属 (Metal):	黄铜电镀镍锡(Brass Tin)
		极数 (Poles):	14* Φ1.3mm
		原料 (Material):	PBT GF/UL-94 V0
		温度范围 (Temperature):	-40° - 125°
		间距 (Pitch):	4.0mm
		额定电流 (Current Rating):	10A - 15A
		绝缘电阻 (Insulation Resistance):	100MΩ 最小值
		接触电阻 (Contact Resistance):	5mΩ (最初)


32.1*48.9*37.8mm

		名称 (Name):	23P连接器
		编码 (Code):	JHB00282(776087-1)
		金属 (Metal):	黄铜电镀镍锡(Brass Tin)
		极数 (Poles):	23* Φ1.3mm
		原料 (Material):	PBT GF/UL-94 V0
		温度范围 (Temperature):	-40° - 125°
		间距 (Pitch):	4.0mm
		额定电流 (Current Rating):	10A - 15A
		绝缘电阻 (Insulation Resistance):	100MΩ 最小值
		接触电阻 (Contact Resistance):	5mΩ (最初)


32.1*60.9*37.8mm

		名称 (Name):	23P连接器 (反向折弯带螺母)
		编码 (Code):	JHB00513
		金属 (Metal):	黄铜电镀镍锡(Brass Tin)
		极数 (Poles):	23* Φ1.3mm
		原料 (Material):	PBT GF/UL-94 V0
		温度范围 (Temperature):	-40° - 125°
		间距 (Pitch):	4.0mm
		额定电流 (Current Rating):	10A - 15A
		绝缘电阻 (Insulation Resistance):	100MΩ 最小值
		接触电阻 (Contact Resistance):	5mΩ (最初)


32.1*60.9*37.8mm

		名称 (Name):	35P连接器
		编码 (Code):	JHB00283(776163-1)
		金属 (Metal):	黄铜电镀镍锡(Brass Tin)
		极数 (Poles):	35* Φ1.3mm
		原料 (Material):	PBT GF/UL-94 V0
		温度范围 (Temperature):	-40° - 125°
		间距 (Pitch):	4.0mm
		额定电流 (Current Rating):	10A - 15A
		绝缘电阻 (Insulation Resistance):	100MΩ 最小值
		接触电阻 (Contact Resistance):	5mΩ (最初)


32.1*76.9*37.8mm

		名称 (Name):	8P连接器(白)
		编码 (Code):	JHB00413(776280-2)
		金属 (Metal):	黄铜电镀镍锡(Brass Tin)
		极数 (Poles):	8* Φ1.3mm
		原料 (Material):	PBT GF/UL-94 V0
		温度范围 (Temperature):	-40° - 125°
		间距 (Pitch):	4.0mm
		额定电流 (Current Rating):	10A - 15A
		绝缘电阻 (Insulation Resistance):	100MΩ 最小值
		接触电阻 (Contact Resistance):	5mΩ (最初)


32.1*40.8*37.8mm

		名称 (Name):	14P连接器(白)
		编码 (Code):	JHB00414(776267-2)
		金属 (Metal):	黄铜电镀镍锡(Brass Tin)
		极数 (Poles):	14* Φ1.3mm
		原料 (Material):	PBT GF/UL-94 V0
		温度范围 (Temperature):	-40° - 125°
		间距 (Pitch):	4.0mm
		额定电流 (Current Rating):	10A - 15A
		绝缘电阻 (Insulation Resistance):	100MΩ 最小值
		接触电阻 (Contact Resistance):	5mΩ (最初)

32.1*48.9*37.8mm


		名称 (Name):	23P连接器(白)
		编码 (Code):	JHB00415(776087-2)
		金属 (Metal):	黄铜电镀镍锡(Brass Tin)
		极数 (Poles):	23* Φ1.3mm
		原料 (Material):	PBT GF/UL-94 V0
		温度范围 (Temperature):	-40° - 125°
		间距 (Pitch):	4.0mm
		额定电流 (Current Rating):	10A - 15A
		绝缘电阻 (Insulation Resistance):	100MΩ 最小值
		接触电阻 (Contact Resistance):	5mΩ (最初)

32.1*60.9*37.8mm




名称 (Name):	35P连接器(白)
编码 (Code):	JHB00416(776163-2)
金属 (Metal):	黄铜电镀镍锡(Brass Tin)
极数 (Poles):	35*Φ1.3mm
原料 (Material):	PBT GF/UL-94 V0
温度范围 (Temperature):	-40° - 125°
间距 (Pitch):	4.0mm
额定电流 (Current Rating):	10A - 15A
绝缘电阻 (Insulation Resistance):	100MΩ 最小值
接触电阻 (Contact Resistance):	5mΩ (最初)

32.1*76.9*37.8mm




名称 (Name):	8P连接器(白)
编码 (Code):	JHB00409(776276-2)
金属 (Metal):	黄铜电镀镍锡(Brass Tin)
极数 (Poles):	8* Φ1.3mm
原料 (Material):	PBT GF/UL-94 V0
温度范围 (Temperature):	-40° - 125°
间距 (Pitch):	4.0mm
额定电流 (Current Rating):	10A - 15A
绝缘电阻 (Insulation Resistance):	100MΩ 最小值
接触电阻 (Contact Resistance):	5mΩ (最初)

32.1*40.8*37.8mm





名称 (Name):	8P连接器
编码 (Code):	JHB00362(776276-1)
金属 (Metal):	黄铜电镀镍锡(Brass Tin)
极数 (Poles):	8* Φ1.3mm
原料 (Material):	PBT GF/UL-94 V0
温度范围 (Temperature):	-40° - 125°
间距 (Pitch):	4.0mm
额定电流 (Current Rating):	10A - 15A
绝缘电阻 (Insulation Resistance):	100MΩ 最小值
接触电阻 (Contact Resistance):	5mΩ (最初)

32.1*40.8*37.8mm




名称 (Name):	14P连接器(白)
编码 (Code):	JHB00410(776262-2)
金属 (Metal):	黄铜电镀镍锡(Brass Tin)
极数 (Poles):	14* Φ1.3mm
原料 (Material):	PBT GF/UL-94 V0
温度范围 (Temperature):	-40° - 125°
间距 (Pitch):	4.0mm
额定电流 (Current Rating):	10A - 15A
绝缘电阻 (Insulation Resistance):	100MΩ 最小值
接触电阻 (Contact Resistance):	5mΩ (最初)

32.1*48.9*37.8mm

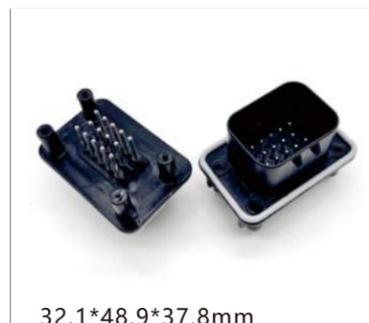


名称 (Name):	14P连接器
编码 (Code):	JHB00363(776262-1)
金属 (Metal):	黄铜电镀镍锡(Brass Tin)
极数 (Poles):	14* Φ1.3mm
原料 (Material):	PBT GF/UL-94 V0
温度范围 (Temperature):	-40° - 125°
间距 (Pitch):	4.0mm
额定电流 (Current Rating):	10A - 15A
绝缘电阻 (Insulation Resistance):	100MΩ 最小值
接触电阻 (Contact Resistance):	5mΩ (最初)

32.1*48.9*37.8mm




名称 (Name):	23P连接器(白)
编码 (Code):	JHB00411(776228-2)
金属 (Metal):	黄铜电镀镍锡(Brass Tin)
极数 (Poles):	23*Φ1.3mm
原料 (Material):	PBT GF/UL-94 V0
温度范围 (Temperature):	-40° - 125°
间距 (Pitch):	4.0mm
额定电流 (Current Rating):	10A - 15A
绝缘电阻 (Insulation Resistance):	100MΩ 最小值
接触电阻 (Contact Resistance):	5mΩ (最初)

32.1*60.9*37.8mm




名称 (Name):	23P连接器
编码 (Code):	JHB00364(776228-1)
金属 (Metal):	黄铜电镀镍锡(Brass Tin)
极数 (Poles):	23*Φ1.3mm
原料 (Material):	PBT GF/UL-94 V0
温度范围 (Temperature):	-40° - 125°
间距 (Pitch):	4.0mm
额定电流 (Current Rating):	10A - 15A
绝缘电阻 (Insulation Resistance):	100MΩ 最小值
接触电阻 (Contact Resistance):	5mΩ (最初)

32.1*60.9*37.8mm




名称 (Name):	35P连接器(白)
编码 (Code):	JHB00408(776231-2)
金属 (Metal):	黄铜电镀镍锡(Brass Tin)
极数 (Poles):	35*Φ1.3mm
原料 (Material):	PBT GF/UL-94 V0
温度范围 (Temperature):	-40° - 125°
间距 (Pitch):	4.0mm
额定电流 (Current Rating):	10A - 15A
绝缘电阻 (Insulation Resistance):	100MΩ 最小值
接触电阻 (Contact Resistance):	5mΩ (最初)

32.1*76.9*37.8mm




名称 (Name):	35P连接器
编码 (Code):	JHB00365(776231-1)
金属 (Metal):	黄铜电镀镍锡(Brass Tin)
极数 (Poles):	35*Φ1.3mm
原料 (Material):	PBT GF/UL-94 V0
温度范围 (Temperature):	-40° - 125°
间距 (Pitch):	4.0mm
额定电流 (Current Rating):	10A - 15A
绝缘电阻 (Insulation Resistance):	100MΩ 最小值
接触电阻 (Contact Resistance):	5mΩ (最初)

32.1*76.9*37.8mm



名称 (Name):	14P连接器(蓝)
编码 (Code):	JHB00465(776262-5)
金属 (Metal):	黄铜电镀镍锡(Brass Tin)
极数 (Poles):	14* Φ1.3mm
原料 (Material):	PBT GF/UL-94 V0
温度范围 (Temperature):	-40° - 125°
间距 (Pitch):	4.0mm
额定电流 (Current Rating):	10A - 15A
绝缘电阻 (Insulation Resistance):	100MΩ 最小值
接触电阻 (Contact Resistance):	5mΩ (最初)

32.1*48.9*37.8mm



名称 (Name):	23P连接器(蓝)
编码 (Code):	JHB00466(776228-5)
金属 (Metal):	黄铜电镀镍锡(Brass Tin)
极数 (Poles):	23*Φ1.3mm
原料 (Material):	PBT GF/UL-94 V0
温度范围 (Temperature):	-40° - 125°
间距 (Pitch):	4.0mm
额定电流 (Current Rating):	10A - 15A
绝缘电阻 (Insulation Resistance):	100MΩ 最小值
接触电阻 (Contact Resistance):	5mΩ (最初)



名称 (Name):	16P连接器
编码 (Code):	JHB00475(19428-0016)
金属 (Metal):	黄铜电镀镍锡(Brass Tin)
极数 (Poles):	16* 1.5*0.8mm
原料 (Material):	PBT GF/UL-94 V0
温度范围 (Temperature):	-40° - 125°
间距 (Pitch):	5.84mm
额定电流 (Current Rating):	20A - 25A
绝缘电阻 (Insulation Resistance):	100MΩ 最小值
接触电阻 (Contact Resistance):	5mΩ (最初)



名称 (Name):	35P连接器(蓝)
编码 (Code):	JHB00467(776231-5)
金属 (Metal):	黄铜电镀镍锡(Brass Tin)
极数 (Poles):	35*Φ1.3mm
原料 (Material):	PBT GF/UL-94 V0
温度范围 (Temperature):	-40° - 125°
间距 (Pitch):	4.0mm
额定电流 (Current Rating):	10A - 15A
绝缘电阻 (Insulation Resistance):	100MΩ 最小值
接触电阻 (Contact Resistance):	5mΩ (最初)



名称 (Name):	14P连接器 (带上盖)
编码 (Code):	JHB00318
金属 (Metal):	黄铜电镀镍锡(Brass Tin)
极数 (Poles):	14* Φ1.3mm
原料 (Material):	PA66 GF/UL-94 V0
温度范围 (Temperature):	-40° - 125°
间距 (Pitch):	4.0mm
额定电流 (Current Rating):	10A - 15A
绝缘电阻 (Insulation Resistance):	100MΩ 最小值
接触电阻 (Contact Resistance):	5mΩ (最初)



名称 (Name):	4P连接器
编码 (Code):	JHB00343(19428-0011)
金属 (Metal):	黄铜电镀镍锡(Brass Tin)
极数 (Poles):	4* 1.5*0.8mm
原料 (Material):	PBT GF/UL-94 V0
温度范围 (Temperature):	-40° - 125°
间距 (Pitch):	5.84mm
额定电流 (Current Rating):	20A - 25A
绝缘电阻 (Insulation Resistance):	100MΩ 最小值
接触电阻 (Contact Resistance):	5mΩ (最初)



名称 (Name):	23P连接器 (带上盖)
编码 (Code):	JHB00319
金属 (Metal):	黄铜电镀镍锡(Brass Tin)
极数 (Poles):	23*Φ1.3mm
原料 (Material):	PA66 GF/UL-94 V0
温度范围 (Temperature):	-40° - 125°
间距 (Pitch):	4.0mm
额定电流 (Current Rating):	10A - 15A
绝缘电阻 (Insulation Resistance):	100MΩ 最小值
接触电阻 (Contact Resistance):	5mΩ (最初)



名称 (Name):	10P连接器
编码 (Code):	JHB00473(19428-0014)
金属 (Metal):	黄铜电镀镍锡(Brass Tin)
极数 (Poles):	10* 1.5*0.8mm
原料 (Material):	PBT GF/UL-94 V0
温度范围 (Temperature):	-40° - 125°
间距 (Pitch):	5.84mm
额定电流 (Current Rating):	20A - 25A
绝缘电阻 (Insulation Resistance):	100MΩ 最小值
接触电阻 (Contact Resistance):	5mΩ (最初)




名称 (Name):	35P连接器 (带上盖)
编码 (Code):	JHB00511
金属 (Metal):	黄铜电镀镍锡(Brass Tin)
极数 (Poles):	35*Φ1.3mm
原料 (Material):	PA66 GF/UL-94 V0
温度范围 (Temperature):	-40° - 125°
间距 (Pitch):	4.0mm
额定电流 (Current Rating):	10A - 15A
绝缘电阻 (Insulation Resistance):	100MΩ 最小值
接触电阻 (Contact Resistance):	5mΩ (最初)




名称 (Name):	12P连接器
编码 (Code):	JHB00474(19428-0015)
金属 (Metal):	黄铜电镀镍锡(Brass Tin)
极数 (Poles):	12* 1.5*0.8mm
原料 (Material):	PBT GF/UL-94 V0
温度范围 (Temperature):	-40° - 125°
间距 (Pitch):	5.84mm
额定电流 (Current Rating):	20A - 25A
绝缘电阻 (Insulation Resistance):	100MΩ 最小值
接触电阻 (Contact Resistance):	5mΩ (最初)




名称 (Name):	22P连接器
编码 (Code):	JHB00545 (1-794107-0)
金属 (Metal):	黄铜电镀镍锡(Brass Tin)
极数 (Poles):	22* Φ1.0mm
原料 (Material):	Pa66
温度范围 (Temperature):	-40° - 125°
间距 (Pitch):	4.14mm
额定电流 (Current Rating):	8A - 10A
绝缘电阻 (Insulation Resistance):	100MΩ 最小值
接触电阻 (Contact Resistance):	5mΩ (最初)


名称 (Name):	26P连接器(5槽)
编码 (Code):	JHB00427(6473418-2)
金属 (Metal):	黄铜电镀镍金(Brass Gold)
极数 (Poles):	26* Φ 1.0mm
原料 (Material):	PA66 GF/UL-94 V0
温度范围 (Temperature):	-40° - 125°
间距 (Pitch):	3.0mm
额定电流 (Current Rating):	8A - 10A
绝缘电阻 (Insulation Resistance):	100M Ω 最小值
接触电阻 (Contact Resistance):	5m Ω (最初)


名称 (Name):	34P连接器
编码 (Code):	JHB00320(2-6447232-3)
金属 (Metal):	黄铜电镀镍锡(Brass Tin)
极数 (Poles):	34* Φ 1.0mm
原料 (Material):	PA66 GF/UL-94 V0
温度范围 (Temperature):	-40° - 125°
间距 (Pitch):	3.0mm
额定电流 (Current Rating):	8A - 10A
绝缘电阻 (Insulation Resistance):	100M Ω 最小值
接触电阻 (Contact Resistance):	5m Ω (最初)


名称 (Name):	26P连接器 (3导槽)
编码 (Code):	JHB00403(9-6437287-8)
金属 (Metal):	黄铜电镀镍锡(Brass Tin)
极数 (Poles):	26* Φ 1.0mm
原料 (Material):	PBT GF/UL-94 V0
温度范围 (Temperature):	-40° - 125°
间距 (Pitch):	3.0mm
额定电流 (Current Rating):	8A - 10A
绝缘电阻 (Insulation Resistance):	100M Ω 最小值
接触电阻 (Contact Resistance):	5m Ω (最初)


名称 (Name):	34P连接器 (3导槽)
编码 (Code):	JHB00404(6437288-1)
金属 (Metal):	黄铜电镀镍锡(Brass Tin)
极数 (Poles):	34* Φ 1.0mm
原料 (Material):	PBT GF/UL-94 V0
温度范围 (Temperature):	-40° - 125°
间距 (Pitch):	3.0mm
额定电流 (Current Rating):	8A - 10A
绝缘电阻 (Insulation Resistance):	100M Ω 最小值
接触电阻 (Contact Resistance):	5m Ω (最初)


名称 (Name):	60P连接器
编码 (Code):	JHB00020(6437288-3)
金属 (Metal):	黄铜电镀镍锡(Brass Tin)
极数 (Poles):	60* Φ 1.0mm
原料 (Material):	PBT GF/UL-94 V0
温度范围 (Temperature):	-40° - 125°
间距 (Pitch):	3.0mm
额定电流 (Current Rating):	8A - 10A
绝缘电阻 (Insulation Resistance):	100M Ω 最小值
接触电阻 (Contact Resistance):	5m Ω (最初)


名称 (Name):	48P连接器
编码 (Code):	JHB00590
金属 (Metal):	黄铜电镀镍锡(Brass Tin)
极数 (Poles):	48*0.64*0.64mm
原料 (Material):	PBT GF/UL-94 HB
温度范围 (Temperature):	-40° - 125°
间距 (Pitch):	4.14mm
额定电流 (Current Rating):	2A - 3A
绝缘电阻 (Insulation Resistance):	100M Ω 最小值
接触电阻 (Contact Resistance):	5m Ω (最初)


名称 (Name):	16P连接器
编码 (Code):	JHB00022
金属 (Metal):	黄铜电镀镍锡(Brass Tin)
极数 (Poles):	16* 2.8*0.8mm
原料 (Material):	PA66 GF/UL-94 V0
温度范围 (Temperature):	-40° - 125°
间距 (Pitch):	6.5mm
额定电流 (Current Rating):	20A - 25A
绝缘电阻 (Insulation Resistance):	100M Ω 最小值
接触电阻 (Contact Resistance):	5m Ω (最初)

名称 (Name):	16P连接器
编码 (Code):	JHB00417(1-963215-1)
金属 (Metal):	黄铜电镀镍锡(Brass Tin)
极数 (Poles):	16*3.0*0.8
原料 (Material):	PBT GF/UL-94 HB
温度范围 (Temperature):	-40° - 125°
间距 (Pitch):	5.0mm
额定电流 (Current Rating):	20A-25A
绝缘电阻 (Insulation Resistance):	100M Ω 最小值
接触电阻 (Contact Resistance):	5m Ω (最初)


名称 (Name):	42P连接器
编码 (Code):	JHB00077(967280-1)
金属 (Metal):	黄铜电镀镍锡(Brass Tin)
极数 (Poles):	6*3.0*0.6+36*1.6 mm
原料 (Material):	PBT GF/UL-94 V0
温度范围 (Temperature):	-40° - 125°
间距 (Pitch):	2.0/4.0mm
额定电流 (Current Rating):	10A(小针) + 20A (大针)
绝缘电阻 (Insulation Resistance):	100M Ω 最小值
接触电阻 (Contact Resistance):	5m Ω (最初)

名称 (Name):	26P连接器
编码 (Code):	JHB00530(6437288-6)
金属 (Metal):	黄铜电镀镍锡(Brass Tin)
极数 (Poles):	26* Φ 1.0mm
原料 (Material):	PA6T GF/UL-94 V0
温度范围 (Temperature):	-40° - 265°
间距 (Pitch):	3.0mm
额定电流 (Current Rating):	8A - 10A
绝缘电阻 (Insulation Resistance):	100M Ω 最小值
接触电阻 (Contact Resistance):	5m Ω (最初)



需配合外壳结构防水




名称 (Name):	34P连接器
编码 (Code):	JHB00531(6447232-3)
金属 (Metal):	黄铜电镀镍锡(Brass Tin)
极数 (Poles):	34* Φ 1.0mm
原料 (Material):	PA6T GF/UL-94 V0
温度范围 (Temperature):	-40° - 265°
间距 (Pitch):	3.0mm
额定电流 (Current Rating):	8A -10A
绝缘电阻 (Insulation Resistance):	100M Ω 最小值
接触电阻 (Contact Resistance):	5m Ω (最初)

16.0*23.0*17.7mm



需配合外壳结构防水




名称 (Name):	8P连接器
编码 (Code):	JHB00395(2301063-1)
金属 (Metal):	黄铜电镀镍锡(Brass Tin)
极数 (Poles):	8* Φ 1.3mm
原料 (Material):	PA66 GF/UL-94 V0
温度范围 (Temperature):	-40° - 125°
间距 (Pitch):	4.0mm
额定电流 (Current Rating):	10A -15A
绝缘电阻 (Insulation Resistance):	100M Ω 最小值
接触电阻 (Contact Resistance):	5m Ω (最初)

14.0*14.0*27.3mm



需配合外壳结构防水




名称 (Name):	14P连接器
编码 (Code):	JHB00396(776267-1)
金属 (Metal):	黄铜电镀镍锡(Brass Tin)
极数 (Poles):	14* Φ 1.3mm
原料 (Material):	PA66 GF/UL-94 V0
温度范围 (Temperature):	-40° - 125°
间距 (Pitch):	4.0mm
额定电流 (Current Rating):	10A -15A
绝缘电阻 (Insulation Resistance):	100M Ω 最小值
接触电阻 (Contact Resistance):	5m Ω (最初)

14.0*22.0*27.3mm



需配合外壳结构防水




名称 (Name):	23P连接器
编码 (Code):	JHB00397(1740313-1)
金属 (Metal):	黄铜电镀镍锡(Brass Tin)
极数 (Poles):	23* Φ 1.3mm
原料 (Material):	PA66 GF/UL-94 V0
温度范围 (Temperature):	-40° - 125°
间距 (Pitch):	4.0mm
额定电流 (Current Rating):	10A -15A
绝缘电阻 (Insulation Resistance):	100M Ω 最小值
接触电阻 (Contact Resistance):	5m Ω (最初)

14.0*34.0*27.3mm



需配合外壳结构防水




名称 (Name):	35P连接器
编码 (Code):	JHB00398(1103599-1)
金属 (Metal):	黄铜电镀镍锡(Brass Tin)
极数 (Poles):	35* Φ 1.3mm
原料 (Material):	PA66 GF/UL-94 V0
温度范围 (Temperature):	-40° - 125°
间距 (Pitch):	4.0mm
额定电流 (Current Rating):	10A -15A
绝缘电阻 (Insulation Resistance):	100M Ω 最小值
接触电阻 (Contact Resistance):	5m Ω (最初)

14.0*49.6*27.3mm



需配合外壳结构防水




名称 (Name):	8P连接器
编码 (Code):	JHB00042(776276-1)
金属 (Metal):	黄铜电镀镍锡(Brass Tin)
极数 (Poles):	8* Φ 1.3mm
原料 (Material):	PA6T GF/UL-94 V0
温度范围 (Temperature):	-40° - 265°
间距 (Pitch):	4.0mm
额定电流 (Current Rating):	10A -15A
绝缘电阻 (Insulation Resistance):	100M Ω 最小值
接触电阻 (Contact Resistance):	5m Ω (最初)

14.0*14.0*27.3mm



需配合外壳结构防水




名称 (Name):	14P连接器
编码 (Code):	JHB00043(776262-1)
金属 (Metal):	黄铜电镀镍锡(Brass Tin)
极数 (Poles):	14* Φ 1.3mm
原料 (Material):	PA6T GF/UL-94 V0
温度范围 (Temperature):	-40° - 265°
间距 (Pitch):	4.0mm
额定电流 (Current Rating):	10A -15A
绝缘电阻 (Insulation Resistance):	100M Ω 最小值
接触电阻 (Contact Resistance):	5m Ω (最初)

14.0*22.0*27.3mm



需配合外壳结构防水




名称 (Name):	23P连接器
编码 (Code):	JHB00044((776228-1)
金属 (Metal):	黄铜电镀镍锡(Brass Tin)
极数 (Poles):	23* Φ 1.3mm
原料 (Material):	PA6T GF/UL-94 V0
温度范围 (Temperature):	-40° - 265°
间距 (Pitch):	4.0mm
额定电流 (Current Rating):	10A -15A
绝缘电阻 (Insulation Resistance):	100M Ω 最小值
接触电阻 (Contact Resistance):	5m Ω (最初)

14.0*34.0*27.3mm



需配合外壳结构防水




名称 (Name):	35P连接器
编码 (Code):	JHB00321/JHB00393(776231-1)
金属 (Metal):	黄铜电镀镍锡(Brass Tin)
极数 (Poles):	35* Φ 1.3mm
原料 (Material):	PA66 GF/UL-94 V0
温度范围 (Temperature):	-40° - 125°
间距 (Pitch):	4.0mm
额定电流 (Current Rating):	10A -15A
绝缘电阻 (Insulation Resistance):	100M Ω 最小值
接触电阻 (Contact Resistance):	5m Ω (最初)

14.0*49.6*22.0mm
14.0*49.6*27.3mm





需配合外壳结构防水





名称 (Name):	4P连接器
编码 (Code):	JHB00023(DT15-4P)
金属 (Metal):	黄铜电镀镍锡(Brass Tin)
极数 (Poles):	4* Φ 1.6mm
原料 (Material):	PA6 GF/UL-94 V0
温度范围 (Temperature):	-40° - 125°
间距 (Pitch):	4.4mm
额定电流 (Current Rating):	15A -20A
绝缘电阻 (Insulation Resistance):	100M Ω 最小值
接触电阻 (Contact Resistance):	5m Ω (最初)


13.8*15.9*15.9mm



		名称 (Name):	8P连接器
		编码 (Code):	JHB00518(30700-4085)
19.6*29.9*16.2mm		金属 (Metal):	黄铜电镀镍锡(Brass Tin)
		极数 (Poles):	8* 0.6*0.8mm
		原料 (Material):	PBT GF/UL-94 HB
		温度范围 (Temperature):	-40° - 105°
		间距 (Pitch):	2.54mm
		额定电流 (Current Rating):	2A - 3A
		绝缘电阻 (Insulation Resistance):	100MΩ 最小值
		接触电阻 (Contact Resistance):	5mΩ (最初)



		名称 (Name):	12P连接器
		编码 (Code):	JHB00045
19.6*29.9*16.2mm		金属 (Metal):	黄铜电镀镍锡(Brass Tin)
		极数 (Poles):	12* 0.64*0.64mm
		原料 (Material):	PBT GF/UL-94 HB
		温度范围 (Temperature):	-40° - 125°
		间距 (Pitch):	2.54mm
		额定电流 (Current Rating):	2A - 3A
		绝缘电阻 (Insulation Resistance):	100MΩ 最小值
		接触电阻 (Contact Resistance):	5mΩ (最初)



		名称 (Name):	32P连接器(灰)
		编码 (Code):	JHB00564 (967598-1)
22.5*53.4*30.2mm		金属 (Metal):	黄铜电镀镍锡(Brass Tin)
		极数 (Poles):	32* 0.64*0.64mm
		原料 (Material):	PBT GF/UL-94 HB
		温度范围 (Temperature):	-40° - 125°
		间距 (Pitch):	2.54mm
		额定电流 (Current Rating):	2A - 3A
		绝缘电阻 (Insulation Resistance):	100MΩ 最小值
		接触电阻 (Contact Resistance):	5mΩ (最初)


		名称 (Name):	32P连接器(绿)
		编码 (Code):	JHB00361(966658-1)
15.6*57.6*20.2mm		金属 (Metal):	黄铜电镀镍锡(Brass Tin)
		极数 (Poles):	32* 0.64*0.64mm
		原料 (Material):	PBT GF/UL-94 HB
		温度范围 (Temperature):	-40° - 125°
		间距 (Pitch):	2.54mm
		额定电流 (Current Rating):	2A - 3A
		绝缘电阻 (Insulation Resistance):	100MΩ 最小值
		接触电阻 (Contact Resistance):	5mΩ (最初)


		名称 (Name):	32P连接器(蓝)
		编码 (Code):	JHB00360(966658-2)
15.6*57.6*20.2mm		金属 (Metal):	黄铜电镀镍锡(Brass Tin)
		极数 (Poles):	32* 0.64*0.64mm
		原料 (Material):	PBT GF/UL-94 HB
		温度范围 (Temperature):	-40° - 125°
		间距 (Pitch):	2.54mm
		额定电流 (Current Rating):	2A - 3A
		绝缘电阻 (Insulation Resistance):	100MΩ 最小值
		接触电阻 (Contact Resistance):	5mΩ (最初)



		名称 (Name):	16P连接器
		编码 (Code):	JHB00293(103254-7)
5.0*20.2*16.6mm		金属 (Metal):	黄铜电镀镍锡(Brass Tin)
		极数 (Poles):	16* 0.64*0.64mm
		原料 (Material):	PA66 GF/UL-94 V0
		温度范围 (Temperature):	-40° - 125°
		间距 (Pitch):	2.54mm
		额定电流 (Current Rating):	2A - 3A
		绝缘电阻 (Insulation Resistance):	100MΩ 最小值
		接触电阻 (Contact Resistance):	5mΩ (最初)



		名称 (Name):	20P连接器
		编码 (Code):	JHB00294(103254-9)
5.0*25.2*16.6mm		金属 (Metal):	黄铜电镀镍锡(Brass Tin)
		极数 (Poles):	20* 0.64*0.64mm
		原料 (Material):	PA66 GF/UL-94 V0
		温度范围 (Temperature):	-40° - 125°
		间距 (Pitch):	2.54mm
		额定电流 (Current Rating):	2A - 3A
		绝缘电阻 (Insulation Resistance):	100MΩ 最小值
		接触电阻 (Contact Resistance):	5mΩ (最初)


		名称 (Name):	32P连接器
		编码 (Code):	JHB00504(966658-1/2)
5.0*25.2*16.6mm		金属 (Metal):	黄铜电镀镍锡(Brass Tin)
		极数 (Poles):	32* 0.64*0.64mm
		原料 (Material):	PA66 GF/UL-94 V0
		温度范围 (Temperature):	-40° - 125°
		间距 (Pitch):	2.54mm
		额定电流 (Current Rating):	2A - 3A
		绝缘电阻 (Insulation Resistance):	100MΩ 最小值
		接触电阻 (Contact Resistance):	5mΩ (最初)


		名称 (Name):	52P连接器
		编码 (Code):	JHB00472/JHB00516/JHB00525
5.0*35.3*16.6mm		金属 (Metal):	黄铜电镀镍锡(Brass Tin)
		极数 (Poles):	52* 0.64*0.64mm
		原料 (Material):	PA66 GF/UL-94 V0
		温度范围 (Temperature):	-40° - 125°
		间距 (Pitch):	2.54mm
		额定电流 (Current Rating):	2A - 3A
		绝缘电阻 (Insulation Resistance):	100MΩ 最小值
		接触电阻 (Contact Resistance):	5mΩ (最初)

		名称 (Name):	44P连接器
		编码 (Code):	JHB00014/JHB00300(MG645802)
5.0*65.4*16.6mm		金属 (Metal):	黄铜电镀镍锡(Brass Tin)
		极数 (Poles):	44* 0.64*0.64mm
		原料 (Material):	PA6T GF/UL-94 V0
		温度范围 (Temperature):	-40° - 265°
		间距 (Pitch):	2.54mm
		额定电流 (Current Rating):	2A - 3A
		绝缘电阻 (Insulation Resistance):	100MΩ 最小值
		接触电阻 (Contact Resistance):	5mΩ (最初)


 <p>需配合外壳结构</p> <p>6.6*39.2*17.3mm</p>		名称 (Name):	28P连接器
		编码 (Code):	JHB00206(MG644088)
		金属 (Metal):	黄铜电镀镍锡(Brass Tin)
		极数 (Poles):	28* 0.64*0.64mm
		原料 (Material):	PA6T GF/UL-94 V0
		温度范围 (Temperature):	-40° - 265°
		间距 (Pitch):	2.2mm
		额定电流 (Current Rating):	2A - 3A
		绝缘电阻 (Insulation Resistance):	100MΩ 最小值
		接触电阻 (Contact Resistance):	5mΩ (最初)


 <p>需配合外壳结构</p> <p>16.4*31.1*16.3mm</p>		名称 (Name):	18P连接器
		编码 (Code):	JHB00013(MG645701)
		金属 (Metal):	黄铜电镀镍锡(Brass Tin)
		极数 (Poles):	18* 1.5*0.6mm
		原料 (Material):	PA6T GF/UL-94 V0
		温度范围 (Temperature):	-40° - 265°
		间距 (Pitch):	3.2mm
		额定电流 (Current Rating):	5A - 8A
		绝缘电阻 (Insulation Resistance):	100MΩ 最小值
		接触电阻 (Contact Resistance):	5mΩ (最初)


 <p>需配合外壳结构</p> <p>塑胶: 3.0*27.2mm 端子: 0.64*14.2 塑胶: 3.0*27.2mm 端子: 0.64*14.7 塑胶: 3.0*27.2mm 端子: 0.64*15.95</p>		名称 (Name):	24P连接器(1376111-2)
		编码 (Code):	JHB00350/JHB00523/JHB00527
		金属 (Metal):	黄铜电镀镍锡(Brass Tin)
		极数 (Poles):	24* 0.64*0.64mm
		原料 (Material):	PA66GF/UL-94 HB
		温度范围 (Temperature):	-40° - 125°
		间距 (Pitch):	2.2mm
		额定电流 (Current Rating):	3A - 5A
		绝缘电阻 (Insulation Resistance):	100MΩ 最小值
		接触电阻 (Contact Resistance):	5mΩ (最初)



 <p>需配合外壳结构</p> <p>16.4*31.1*16.3mm</p>		名称 (Name):	12P连接器
		编码 (Code):	JHB00521(174957-1)
		金属 (Metal):	黄铜电镀镍锡(Brass Tin)
		极数 (Poles):	12* 1.7*0.6mm
		原料 (Material):	PA66 GF/UL-94 V0
		温度范围 (Temperature):	-40° - 125°
		间距 (Pitch):	3.5mm
		额定电流 (Current Rating):	5A - 8A
		绝缘电阻 (Insulation Resistance):	100MΩ 最小值
		接触电阻 (Contact Resistance):	5mΩ (最初)


 <p>需配合外壳结构</p> <p>塑胶: 3.0*36mm 端子: 0.64*14.2 塑胶: 4.0*36mm 端子: 0.64*15.95</p>		名称 (Name):	32P连接器
		编码 (Code):	JHB00351/JHB00499
		金属 (Metal):	黄铜电镀镍锡(Brass Tin)
		极数 (Poles):	32* 0.64*0.64mm
		原料 (Material):	PA66 GF/UL-94 V0
		温度范围 (Temperature):	-40° - 125°
		间距 (Pitch):	2.2mm
		额定电流 (Current Rating):	3A - 5A
		绝缘电阻 (Insulation Resistance):	100MΩ 最小值
		接触电阻 (Contact Resistance):	5mΩ (最初)

 <p>需配合外壳结构</p> <p>8.6*34.6*17.2mm</p>		名称 (Name):	12P连接器
		编码 (Code):	JHB00204(MG642466)
		金属 (Metal):	黄铜电镀镍锡(Brass Tin)
		极数 (Poles):	12* 2.3*0.6mm
		原料 (Material):	PA6T GF/UL-94 V0
		温度范围 (Temperature):	-40° - 265°
		间距 (Pitch):	4.0mm
		额定电流 (Current Rating):	10A - 12A
		绝缘电阻 (Insulation Resistance):	100MΩ 最小值
		接触电阻 (Contact Resistance):	5mΩ (最初)

 <p>需配合外壳结构</p> <p>6.6*39.2*17.3mm</p>		名称 (Name):	40P连接器
		编码 (Code):	JHB00500(1376113-2)
		金属 (Metal):	黄铜电镀镍锡(Brass Tin)
		极数 (Poles):	40* 0.64*0.64mm
		原料 (Material):	PA6T GF/UL-94 V0
		温度范围 (Temperature):	-40° - 265°
		间距 (Pitch):	2.2mm
		额定电流 (Current Rating):	2A - 3A
		绝缘电阻 (Insulation Resistance):	100MΩ 最小值
		接触电阻 (Contact Resistance):	5mΩ (最初)

 <p>需配合外壳结构</p> <p>8.6*39.0*17.2mm</p>		名称 (Name):	16P连接器
		编码 (Code):	JHB00205(MG643200)
		金属 (Metal):	黄铜电镀镍锡(Brass Tin)
		极数 (Poles):	16* 2.3*0.6mm
		原料 (Material):	PA6T GF/UL-94 V0
		温度范围 (Temperature):	-40° - 265°
		间距 (Pitch):	4.0mm
		额定电流 (Current Rating):	10A - 12A
		绝缘电阻 (Insulation Resistance):	100MΩ 最小值
		接触电阻 (Contact Resistance):	5mΩ (最初)

 <p>需配合外壳结构</p> <p>9.7*28.0*19.0mm</p>		名称 (Name):	16P连接器
		编码 (Code):	JHB00102
		金属 (Metal):	黄铜电镀镍锡(Brass Tin)
		极数 (Poles):	16* 1.5*0.8mm
		原料 (Material):	PA66 GF/UL-94 V0
		温度范围 (Temperature):	-40° - 125°
		间距 (Pitch):	3.5mm
		额定电流 (Current Rating):	10A - 12A
		绝缘电阻 (Insulation Resistance):	100MΩ 最小值
		接触电阻 (Contact Resistance):	5mΩ (最初)


 <p>需配合外壳结构</p> <p>10.4*29.9*19.0mm</p>		名称 (Name):	12P连接器
		编码 (Code):	JHB00101
		金属 (Metal):	黄铜电镀镍锡(Brass Tin)
		极数 (Poles):	12* 2.8*0.8mm
		原料 (Material):	PA66 GF/UL-94 HB
		温度范围 (Temperature):	-40° - 125°
		间距 (Pitch):	5.0mm
		额定电流 (Current Rating):	18A - 20A
		绝缘电阻 (Insulation Resistance):	100MΩ 最小值
		接触电阻 (Contact Resistance):	5mΩ (最初)

需配合外壳结构



塑胶: 3.2*58.8mm 端子: 2.8*0.8*19
塑胶: 2.8*57.5mm 端子: 2.8*0.8*17.4

名称 (Name):	22P连接器
编码 (Code):	JHB00349/JHB00522(963357-1)
金属 (Metal):	黄铜电镀镍锡(Brass Tin)
极数 (Poles):	22* 2.8*0.8mm
原料 (Material):	PA66 GF/UL-94 V0
温度范围 (Temperature):	-40° - 125°
间距 (Pitch):	5mm
额定电流 (Current Rating):	3A - 5A
绝缘电阻 (Insulation Resistance):	100MΩ 最小值
接触电阻 (Contact Resistance):	5mΩ (最初)

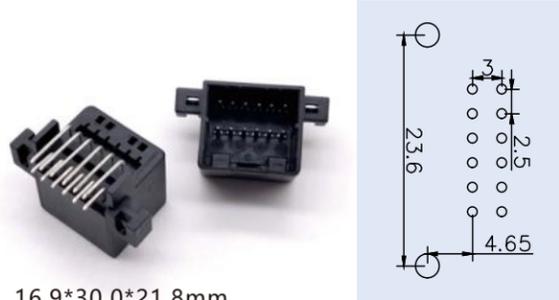

16.9*30.0*21.8mm


名称 (Name):	12P连接器
编码 (Code):	JHB00117(174051-2)
金属 (Metal):	黄铜电镀镍锡(Brass Tin)
极数 (Poles):	12* 1.0*0.6mm
原料 (Material):	PBT GF/UL-94 HB
温度范围 (Temperature):	-40° - 125°
间距 (Pitch):	2.5mm
额定电流 (Current Rating):	3A - 5A
绝缘电阻 (Insulation Resistance):	100MΩ 最小值
接触电阻 (Contact Resistance):	5mΩ (最初)

需配合外壳结构



16.9*30.0*21.8mm

名称 (Name):	14P连接器
编码 (Code):	JHB00498(963357-3)
金属 (Metal):	黄铜电镀镍锡(Brass Tin)
极数 (Poles):	14* 2.8*0.8mm
原料 (Material):	PA6T GF/UL-94 V0
温度范围 (Temperature):	-40° - 265°
间距 (Pitch):	5mm
额定电流 (Current Rating):	3A - 5A
绝缘电阻 (Insulation Resistance):	100MΩ 最小值
接触电阻 (Contact Resistance):	5mΩ (最初)

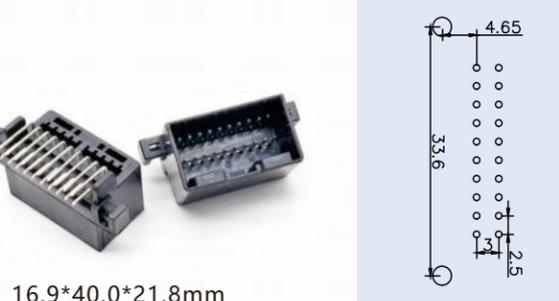

16.9*40.0*21.8mm


名称 (Name):	20P连接器
编码 (Code):	JHB00003(174055-2)
金属 (Metal):	黄铜电镀镍锡(Brass Tin)
极数 (Poles):	20* 1.0*0.6mm
原料 (Material):	PBT GF/UL-94 HB
温度范围 (Temperature):	-40° - 125°
间距 (Pitch):	2.5mm
额定电流 (Current Rating):	3A - 5A
绝缘电阻 (Insulation Resistance):	100MΩ 最小值
接触电阻 (Contact Resistance):	5mΩ (最初)

需配合外壳结构



9.4*63.0*21.0mm

名称 (Name):	22P连接器
编码 (Code):	JHB00303(963357-1)
金属 (Metal):	黄铜电镀镍锡(Brass Tin)
极数 (Poles):	22* 3.0*0.8mm
原料 (Material):	PA6T GF/UL-94V0
温度范围 (Temperature):	-40° - 265°
间距 (Pitch):	5.0mm
额定电流 (Current Rating):	20A - 25A
绝缘电阻 (Insulation Resistance):	100MΩ 最小值
接触电阻 (Contact Resistance):	5mΩ (最初)

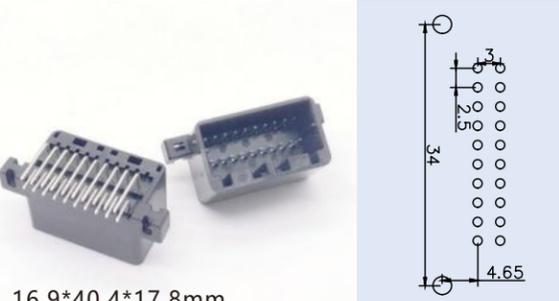

16.9*40.4*17.8mm


名称 (Name):	20P连接器
编码 (Code):	JHB00104(175975-2)
金属 (Metal):	黄铜电镀镍锡(Brass Tin)
极数 (Poles):	20* 1.0*0.6mm
原料 (Material):	PBT GF/UL-94 HB
温度范围 (Temperature):	-40° - 125°
间距 (Pitch):	2.5mm
额定电流 (Current Rating):	3A - 5A
绝缘电阻 (Insulation Resistance):	100MΩ 最小值
接触电阻 (Contact Resistance):	5mΩ (最初)

需配合外壳结构



16.9*30.0*21.8mm

名称 (Name):	25P连接器
编码 (Code):	JHB00524(1670615)
金属 (Metal):	黄铜电镀镍锡(Brass Tin)
极数 (Poles):	18* 1.7*0.6+7* 2.8*0.8
原料 (Material):	PA66 GF/UL-94 V0
温度范围 (Temperature):	-40° - 125°
间距 (Pitch):	4.0mm/5.0mm
额定电流 (Current Rating):	10A /20A
绝缘电阻 (Insulation Resistance):	100MΩ 最小值
接触电阻 (Contact Resistance):	5mΩ (最初)

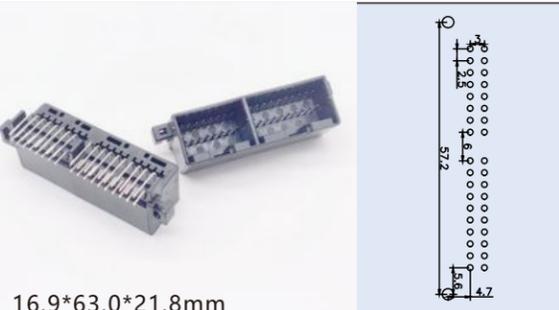

16.9*63.0*21.8mm

名称 (Name):	36P连接器
编码 (Code):	JHB00122(174146-2)
金属 (Metal):	黄铜电镀镍锡(Brass Tin)
极数 (Poles):	36* 1.0*0.6mm
原料 (Material):	PBT GF/UL-94 HB
温度范围 (Temperature):	-40° - 125°
间距 (Pitch):	2.5mm
额定电流 (Current Rating):	3A - 5A
绝缘电阻 (Insulation Resistance):	100MΩ 最小值
接触电阻 (Contact Resistance):	5mΩ (最初)

需配合外壳结构



塑胶: 2.5*36.6mm 端子: 0.64*15.95
塑胶: 2.5*36.6mm 端子: 0.64*14.2

名称 (Name):	48P连接器
编码 (Code):	JHB00352/JHB00515
金属 (Metal):	黄铜电镀镍锡(Brass Tin)
极数 (Poles):	8* 1.5*0.8+40* 0.64*0.64
原料 (Material):	PA66 GF/UL-94 V0
温度范围 (Temperature):	-40° - 125°
间距 (Pitch):	3.7mm/2.5mm
额定电流 (Current Rating):	3A - 5A
绝缘电阻 (Insulation Resistance):	100MΩ 最小值
接触电阻 (Contact Resistance):	5mΩ (最初)




16.9*53.0*21.8mm

名称 (Name):	36P连接器
编码 (Code):	JHB00449(174912-2)
金属 (Metal):	黄铜电镀镍锡(Brass Tin)
极数 (Poles):	36* 1.0*0.6mm
原料 (Material):	PBT GF/UL-94 HB
温度范围 (Temperature):	-40° - 125°
间距 (Pitch):	2.5mm
额定电流 (Current Rating):	3A - 5A
绝缘电阻 (Insulation Resistance):	100MΩ 最小值
接触电阻 (Contact Resistance):	5mΩ (最初)




19.6*60.5*16.2mm

名称 (Name):	40P连接器 (灰)
编码 (Code):	JHB00047 (DJ7403Y-0.6-10)
金属 (Metal):	黄铜电镀镍锡(Brass Tin)
极数 (Poles):	40* 0.64*0.64mm
原料 (Material):	PBT GF/UL-94 V0
温度范围 (Temperature):	-40° - 125°
间距 (Pitch):	2.54mm
额定电流 (Current Rating):	2A - 3A
绝缘电阻 (Insulation Resistance):	100MΩ 最小值
接触电阻 (Contact Resistance) :	5mΩ (最初)





15.8*32.7*23.5mm

名称 (Name):	8P连接器
编码 (Code):	JHB00387(174955-1)
金属 (Metal):	黄铜电镀镍锡(Brass Tin)
极数 (Poles):	12* 1.7*0.6mm
原料 (Material):	PBT GF/UL-94 HB
温度范围 (Temperature):	-40° - 125°
间距 (Pitch):	3.5mm
额定电流 (Current Rating):	8A - 10A
绝缘电阻 (Insulation Resistance):	100MΩ 最小值
接触电阻 (Contact Resistance) :	5mΩ (最初)





16.9*37.5*19.2mm

名称 (Name):	20P连接器
编码 (Code):	JHB00015(174977-2)
金属 (Metal):	黄铜电镀镍锡(Brass Tin)
极数 (Poles):	20* 1.0*0.6mm
原料 (Material):	PBT GF/UL-94 HB
温度范围 (Temperature):	-40° - 125°
间距 (Pitch):	2.5mm
额定电流 (Current Rating):	3A - 5A
绝缘电阻 (Insulation Resistance):	100MΩ 最小值
接触电阻 (Contact Resistance) :	5mΩ (最初)





15.8*32.7*23.5mm

名称 (Name):	12P连接器
编码 (Code):	JHB00109(174957-1)
金属 (Metal):	黄铜电镀镍锡(Brass Tin)
极数 (Poles):	12* 1.7*0.6mm
原料 (Material):	PBT GF/UL-94 HB
温度范围 (Temperature):	-40° - 125°
间距 (Pitch):	3.5mm
额定电流 (Current Rating):	8A - 10A
绝缘电阻 (Insulation Resistance):	100MΩ 最小值
接触电阻 (Contact Resistance) :	5mΩ (最初)





16.9*37.5*21.6mm

名称 (Name):	20P连接器
编码 (Code):	JHB00128(179254-2)
金属 (Metal):	黄铜电镀镍锡(Brass Tin)
极数 (Poles):	20* 1.0*0.6mm
原料 (Material):	PBT GF/UL-94 HB
温度范围 (Temperature):	-40° - 125°
间距 (Pitch):	2.5mm
额定电流 (Current Rating):	3A - 5A
绝缘电阻 (Insulation Resistance):	100MΩ 最小值
接触电阻 (Contact Resistance) :	5mΩ (最初)






15.8*34.5*23.5mm

名称 (Name):	12P连接器
编码 (Code):	JHB00005(284162-1)
金属 (Metal):	黄铜电镀镍锡(Brass Tin)
极数 (Poles):	6* 2.8*0.6+6* 1.7*0.6mm
原料 (Material):	PBT GF/UL-94 HB
温度范围 (Temperature):	-40° - 125°
间距 (Pitch):	3.5mm/5.0mm
额定电流 (Current Rating):	12A - 15A/ 8A-10A
绝缘电阻 (Insulation Resistance):	100MΩ 最小值
接触电阻 (Contact Resistance) :	5mΩ (最初)





16.9*51.0*21.6mm

名称 (Name):	28P连接器
编码 (Code):	JHB00017(174979-2)
金属 (Metal):	黄铜电镀镍锡(Brass Tin)
极数 (Poles):	28* 1.0*0.6mm
原料 (Material):	PBT GF/UL-94 HB
温度范围 (Temperature):	-40° - 125°
间距 (Pitch):	2.5mm
额定电流 (Current Rating):	3A - 5A
绝缘电阻 (Insulation Resistance):	100MΩ 最小值
接触电阻 (Contact Resistance) :	5mΩ (最初)



15.8*34.5*23.5mm

名称 (Name):	12P连接器 (绿)
编码 (Code):	JHB00009(284162-3)
金属 (Metal):	黄铜电镀镍锡(Brass Tin)
极数 (Poles):	6* 2.8*0.6+6* 1.7*0.6mm
原料 (Material):	PBT GF/UL-94 HB
温度范围 (Temperature):	-40° - 125°
间距 (Pitch):	3.5mm/5.0mm
额定电流 (Current Rating):	12A - 15A/ 8A-10A
绝缘电阻 (Insulation Resistance):	100MΩ 最小值
接触电阻 (Contact Resistance) :	5mΩ (最初)





16.9*61.0*21.6mm


名称 (Name):	36P连接器
编码 (Code):	JHB00016(175977-2)
金属 (Metal):	黄铜电镀镍锡(Brass Tin)
极数 (Poles):	36* 1.0*0.6mm
原料 (Material):	PBT GF/UL-94 HB
温度范围 (Temperature):	-40° - 125°
间距 (Pitch):	2.5mm
额定电流 (Current Rating):	3A - 5A
绝缘电阻 (Insulation Resistance):	100MΩ 最小值
接触电阻 (Contact Resistance) :	5mΩ (最初)






15.8*46.7*23.5mm


名称 (Name):	20P连接器
编码 (Code):	JHB00152(174960-1)
金属 (Metal):	黄铜电镀镍锡(Brass Tin)
极数 (Poles):	20* 1.7*0.6mm
原料 (Material):	PBT GF/UL-94 HB
温度范围 (Temperature):	-40° - 125°
间距 (Pitch):	3.5mm
额定电流 (Current Rating):	8A - 10A
绝缘电阻 (Insulation Resistance):	100MΩ 最小值
接触电阻 (Contact Resistance) :	5mΩ (最初)





 <p>15.8*32.7*23.5mm</p>		名称 (Name):	12P连接器
		编码 (Code):	JHB00454(173858-1)
		金属 (Metal):	黄铜电镀镍锡(Brass Tin)
		极数 (Poles):	12* 1.7*0.6mm
		原料 (Material):	PBT GF/UL-94 HB
		温度范围 (Temperature):	-40° - 125°
		间距 (Pitch):	3.5mm
		额定电流 (Current Rating):	8A - 10A
		绝缘电阻 (Insulation Resistance):	100MΩ 最小值
		接触电阻 (Contact Resistance):	5mΩ (最初)


 <p>15.7*23.5*22.7mm</p>		名称 (Name):	5P连接器
		编码 (Code):	JHB00089(7051-3-10)
		金属 (Metal):	黄铜电镀镍锡(Brass Tin)
		极数 (Poles):	5* 3.0*0.6mm
		原料 (Material):	PA6 /UL-94 HB
		温度范围 (Temperature):	-40° - 125°
		间距 (Pitch):	7.0mm
		额定电流 (Current Rating):	15A - 18A
		绝缘电阻 (Insulation Resistance):	100MΩ 最小值
		接触电阻 (Contact Resistance):	5mΩ (最初)


 <p>15.8*60.6*18.5mm</p>		名称 (Name):	20P连接器
		编码 (Code):	JHB00107(175785-2)
		金属 (Metal):	黄铜电镀镍锡(Brass Tin)
		极数 (Poles):	20* 1.7*0.6mm
		原料 (Material):	PBT GF/UL-94 HB
		温度范围 (Temperature):	-40° - 125°
		间距 (Pitch):	3.5mm
		额定电流 (Current Rating):	8A - 10A
		绝缘电阻 (Insulation Resistance):	100MΩ 最小值
		接触电阻 (Contact Resistance):	5mΩ (最初)


 <p>15.7*29.0*22.7mm</p>		名称 (Name):	7P连接器
		编码 (Code):	JHB00098(7071-3-10)
		金属 (Metal):	黄铜电镀镍锡(Brass Tin)
		极数 (Poles):	7* 3.0*0.6mm
		原料 (Material):	PA6 /UL-94 HB
		温度范围 (Temperature):	-40° - 125°
		间距 (Pitch):	7.0mm
		额定电流 (Current Rating):	15A - 18A
		绝缘电阻 (Insulation Resistance):	100MΩ 最小值
		接触电阻 (Contact Resistance):	5mΩ (最初)


 <p>15.8*32.7*23.5mm</p>		名称 (Name):	30P连接器
		编码 (Code):	JHB00211 (173866-1)
		金属 (Metal):	黄铜电镀镍锡(Brass Tin)
		极数 (Poles):	30* 1.7*0.6mm
		原料 (Material):	PBT GF/UL-94 HB
		温度范围 (Temperature):	-40° - 125°
		间距 (Pitch):	3.5mm
		额定电流 (Current Rating):	8A - 10A
		绝缘电阻 (Insulation Resistance):	100MΩ 最小值
		接触电阻 (Contact Resistance):	5mΩ (最初)

 <p>15.7*34.0*22.7mm</p>		名称 (Name):	9P连接器
		编码 (Code):	JHB00092(7091-3-10)
		金属 (Metal):	黄铜电镀镍锡(Brass Tin)
		极数 (Poles):	9* 3.0*0.6mm
		原料 (Material):	PA6 GF/UL-94 HB
		温度范围 (Temperature):	-40° - 125°
		间距 (Pitch):	7.0mm
		额定电流 (Current Rating):	15A - 18A
		绝缘电阻 (Insulation Resistance):	100MΩ 最小值
		接触电阻 (Contact Resistance):	5mΩ (最初)

 <p>17.1*48.5*22.2mm</p>		名称 (Name):	9P连接器
		编码 (Code):	JHB00001(171894-1)
		金属 (Metal):	黄铜电镀镍锡(Brass Tin)
		极数 (Poles):	9* 3.0*0.6mm
		原料 (Material):	PA66 GF/UL-94 V1
		温度范围 (Temperature):	-40° - 125°
		间距 (Pitch):	5.0mm
		额定电流 (Current Rating):	15A - 18A
		绝缘电阻 (Insulation Resistance):	100MΩ 最小值
		接触电阻 (Contact Resistance):	5mΩ (最初)


 <p>15.7*44.6*22.7mm</p>		名称 (Name):	13P连接器
		编码 (Code):	JHB00096(7131-3-10)
		金属 (Metal):	黄铜电镀镍锡(Brass Tin)
		极数 (Poles):	13* 3.0*0.6mm
		原料 (Material):	PA6 GF/UL-94 HB
		温度范围 (Temperature):	-40° - 125°
		间距 (Pitch):	7.0mm
		额定电流 (Current Rating):	15A - 18A
		绝缘电阻 (Insulation Resistance):	100MΩ 最小值
		接触电阻 (Contact Resistance):	5mΩ (最初)

 <p>22.0*35.8*24.2mm</p>		名称 (Name):	12P连接器 (绿)
		编码 (Code):	JHB00046
		金属 (Metal):	黄铜电镀镍锡(Brass Tin)
		极数 (Poles):	12* 2.8*0.6mm
		原料 (Material):	PBT GF/UL-94 V0
		温度范围 (Temperature):	-40° - 125°
		间距 (Pitch):	5.0mm
		额定电流 (Current Rating):	12A - 15A
		绝缘电阻 (Insulation Resistance):	100MΩ 最小值
		接触电阻 (Contact Resistance):	5mΩ (最初)


 <p>15.7*54.6*22.7mm</p>		名称 (Name):	17P连接器 (白)
		编码 (Code):	JHB00097(7171-3-10)
		金属 (Metal):	黄铜电镀镍锡(Brass Tin)
		极数 (Poles):	17* 3.0*0.6mm
		原料 (Material):	PA6 GF/UL-94 HB
		温度范围 (Temperature):	-40° - 125°
		间距 (Pitch):	7.0mm
		额定电流 (Current Rating):	15A - 18A
		绝缘电阻 (Insulation Resistance):	100MΩ 最小值
		接触电阻 (Contact Resistance):	5mΩ (最初)




14.0*22.0*27.3mm



名称 (Name):	26P连接器 (灰)
编码 (Code):	JHB00567 (175571-6)
金属 (Metal):	黄铜电镀镍锡(Brass Tin)
极数 (Poles):	10* 1.7*0.6+16* 1.0*0.6mm
原料 (Material):	PBT GF/UL-94 HB
温度范围 (Temperature):	-40° - 125°
间距 (Pitch):	3.0mm/3.5mm
额定电流 (Current Rating):	8A-10A/ 5A-8A
绝缘电阻 (Insulation Resistance):	100MΩ 最小值
接触电阻 (Contact Resistance) :	5mΩ (最初)

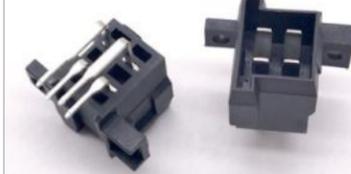


19.0*26.1*17.3mm



名称 (Name):	4P连接器
编码 (Code):	JHB00284(828801-1)
金属 (Metal):	黄铜电镀镍锡(Brass Tin)
极数 (Poles):	4* 3.0*0.8mm
原料 (Material):	PBT GF/UL-94 V0
温度范围 (Temperature):	-40° - 125°
间距 (Pitch):	5.0mm
额定电流 (Current Rating):	20A - 25A
绝缘电阻 (Insulation Resistance):	100MΩ 最小值
接触电阻 (Contact Resistance) :	5mΩ (最初)




14.0*34.0*27.3mm



名称 (Name):	34P连接器
编码 (Code):	JHB00457(175444-1)
金属 (Metal):	黄铜电镀镍锡(Brass Tin)
极数 (Poles):	18* 1.7*0.6+16* 1.0*0.6mm
原料 (Material):	PBT GF/UL-94 HB
温度范围 (Temperature):	-40° - 125°
间距 (Pitch):	3.0mm/3.5mm
额定电流 (Current Rating):	8A-10A/ 5A-8A
绝缘电阻 (Insulation Resistance):	100MΩ 最小值
接触电阻 (Contact Resistance) :	5mΩ (最初)




19.0*31.1*17.3mm



名称 (Name):	6P连接器
编码 (Code):	JHB00285(828801-2)
金属 (Metal):	黄铜电镀镍锡(Brass Tin)
极数 (Poles):	6* 3.0*0.8mm
原料 (Material):	PBT GF/UL-94 V0
温度范围 (Temperature):	-40° - 125°
间距 (Pitch):	5.0mm
额定电流 (Current Rating):	20A - 25A
绝缘电阻 (Insulation Resistance):	100MΩ 最小值
接触电阻 (Contact Resistance) :	5mΩ (最初)




14.0*49.6*27.3mm



名称 (Name):	42P连接器
编码 (Code):	JHB00458(175446-1)
金属 (Metal):	黄铜电镀镍锡(Brass Tin)
极数 (Poles):	10* 1.7*0.6+32* 1.0*0.6mm
原料 (Material):	PBT GF/UL-94 HB
温度范围 (Temperature):	-40° - 125°
间距 (Pitch):	3.0mm/3.5mm
额定电流 (Current Rating):	8A-10A/ 5A-8A
绝缘电阻 (Insulation Resistance):	100MΩ 最小值
接触电阻 (Contact Resistance) :	5mΩ (最初)




19.0*36.1*17.3mm



名称 (Name):	8P连接器
编码 (Code):	JHB00127(828801-3)
金属 (Metal):	黄铜电镀镍锡(Brass Tin)
极数 (Poles):	8* 3.0*0.8mm
原料 (Material):	PBT GF/UL-94 V0
温度范围 (Temperature):	-40° - 125°
间距 (Pitch):	5.0mm
额定电流 (Current Rating):	20A - 25A
绝缘电阻 (Insulation Resistance):	100MΩ 最小值
接触电阻 (Contact Resistance) :	5mΩ (最初)




21.9*117.8*18.5mm



名称 (Name):	64P连接器
编码 (Code):	JHB00111(178764-2)
金属 (Metal):	黄铜电镀镍锡(Brass Tin)
极数 (Poles):	16* 1.7*0.6+48* 1.0*0.6mm
原料 (Material):	PBT GF/UL-94 HB
温度范围 (Temperature):	-40° - 125°
间距 (Pitch):	3.0mm/3.5mm
额定电流 (Current Rating):	8A-10A/ 5A-8A
绝缘电阻 (Insulation Resistance):	100MΩ 最小值
接触电阻 (Contact Resistance) :	5mΩ (最初)




19.0*41.1*17.3mm




名称 (Name):	10P连接器
编码 (Code):	JHB00286(828801-4)
金属 (Metal):	黄铜电镀镍锡(Brass Tin)
极数 (Poles):	10* 3.0*0.8mm
原料 (Material):	PBT GF/UL-94 V0
温度范围 (Temperature):	-40° - 125°
间距 (Pitch):	5.0mm
额定电流 (Current Rating):	20A - 25A
绝缘电阻 (Insulation Resistance):	100MΩ 最小值
接触电阻 (Contact Resistance) :	5mΩ (最初)




13.8*15.9*15.9mm




名称 (Name):	20P连接器
编码 (Code):	JHB00603
金属 (Metal):	黄铜电镀镍锡(Brass Tin)
极数 (Poles):	4* 1.7*0.6+16* 1.0*0.6mm
原料 (Material):	PBT GF/UL-94 HB
温度范围 (Temperature):	-40° - 125°
间距 (Pitch):	3.2mm/4.35mm
额定电流 (Current Rating):	8A-10A/ 5A-8A
绝缘电阻 (Insulation Resistance):	100MΩ 最小值
接触电阻 (Contact Resistance) :	5mΩ (最初)

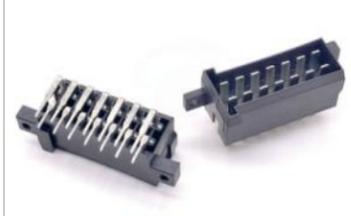

19.0*51.1*17.3mm



名称 (Name):	14P连接器
编码 (Code):	JHB00287(828801-5)
金属 (Metal):	黄铜电镀镍锡(Brass Tin)
极数 (Poles):	14* 3.0*0.8mm
原料 (Material):	PBT GF/UL-94 V0
温度范围 (Temperature):	-40° - 125°
间距 (Pitch):	5.0mm
额定电流 (Current Rating):	20A - 25A
绝缘电阻 (Insulation Resistance):	100MΩ 最小值
接触电阻 (Contact Resistance) :	5mΩ (最初)

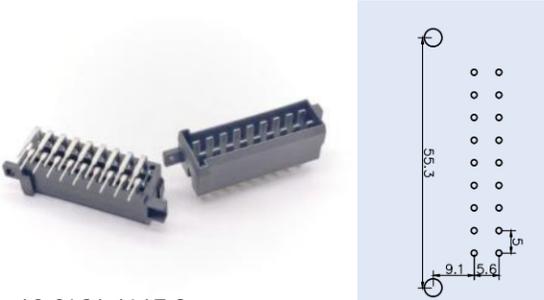

19.0*61.1*17.3mm

名称 (Name):	18P连接器
编码 (Code):	JHB00085(828801-6)
金属 (Metal):	黄铜电镀镍锡(Brass Tin)
极数 (Poles):	18* 3.0*0.8mm
原料 (Material):	PBT GF/UL-94 V0
温度范围 (Temperature):	-40° - 125°
间距 (Pitch):	5.0mm
额定电流 (Current Rating):	20A - 25A
绝缘电阻 (Insulation Resistance):	100MΩ 最小值
接触电阻 (Contact Rresistance) :	5mΩ (最初)



20.0*61.1*18.3mm

名称 (Name):	10P连接器
编码 (Code):	JHB00256(963357-4)
金属 (Metal):	黄铜电镀镍锡(Brass Tin)
极数 (Poles):	10* 3.0*0.8mm
原料 (Material):	PBT GF/UL-94 HB
温度范围 (Temperature):	-40° - 125°
间距 (Pitch):	5.0mm
额定电流 (Current Rating):	20A - 25A
绝缘电阻 (Insulation Resistance):	100MΩ 最小值
接触电阻 (Contact Resistance) :	5mΩ (最初)




19.0*71.1*17.3mm

名称 (Name):	22P连接器
编码 (Code):	JHB00257(828801-7)
金属 (Metal):	黄铜电镀镍锡(Brass Tin)
极数 (Poles):	22* 3.0*0.8mm
原料 (Material):	PBT GF/UL-94 V0
温度范围 (Temperature):	-40° - 125°
间距 (Pitch):	5.0mm
额定电流 (Current Rating):	20A - 25A
绝缘电阻 (Insulation Resistance):	100MΩ 最小值
接触电阻 (Contact Rresistance) :	5mΩ (最初)



20.0*71.1*18.3mm

名称 (Name):	14P连接器
编码 (Code):	JHB00228(963357-3)
金属 (Metal):	黄铜电镀镍锡(Brass Tin)
极数 (Poles):	14* 3.0*0.8mm
原料 (Material):	PBT GF/UL-94 HB
温度范围 (Temperature):	-40° - 125°
间距 (Pitch):	5.0mm
额定电流 (Current Rating):	20A - 25A
绝缘电阻 (Insulation Resistance):	100MΩ 最小值
接触电阻 (Contact Resistance) :	5mΩ (最初)

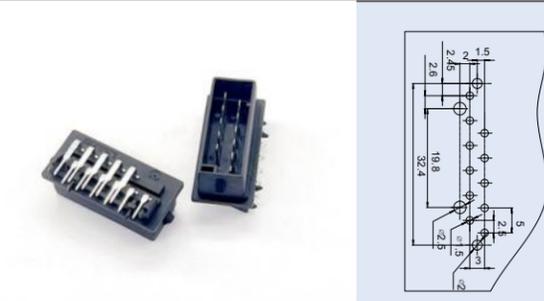

20.0*61.1*18.3mm

名称 (Name):	11P连接器
编码 (Code):	JHB00561
金属 (Metal):	黄铜电镀镍锡(Brass Tin)
极数 (Poles):	11* 2.8*0.8mm
原料 (Material):	PA66 GF/UL-94 V0
温度范围 (Temperature):	-40° - 125°
间距 (Pitch):	5.0mm
额定电流 (Current Rating):	20A - 25A
绝缘电阻 (Insulation Resistance):	100MΩ 最小值
接触电阻 (Contact Rresistance) :	5mΩ (最初)



20.0*61.1*18.3mm

名称 (Name):	18P连接器
编码 (Code):	JHB00002(963357-2)
金属 (Metal):	黄铜电镀镍锡(Brass Tin)
极数 (Poles):	18* 3.0*0.8mm
原料 (Material):	PBT GF/UL-94 HB
温度范围 (Temperature):	-40° - 125°
间距 (Pitch):	5.0mm
额定电流 (Current Rating):	20A - 25A
绝缘电阻 (Insulation Resistance):	100MΩ 最小值
接触电阻 (Contact Resistance) :	5mΩ (最初)



20.0*61.1*18.3mm

名称 (Name):	4P连接器
编码 (Code):	JHB00452(963357-6)
金属 (Metal):	黄铜电镀镍锡(Brass Tin)
极数 (Poles):	4* 3.0*0.8mm
原料 (Material):	PBT GF/UL-94 HB
温度范围 (Temperature):	-40° - 125°
间距 (Pitch):	5.0mm
额定电流 (Current Rating):	20A - 25A
绝缘电阻 (Insulation Resistance):	100MΩ 最小值
接触电阻 (Contact Rresistance) :	5mΩ (最初)



20.0*71.1*18.3mm

名称 (Name):	22P连接器
编码 (Code):	JHB00010(963357-1)
金属 (Metal):	黄铜电镀镍锡(Brass Tin)
极数 (Poles):	22* 3.0*0.8mm
原料 (Material):	PBT GF/UL-94 HB
温度范围 (Temperature):	-40° - 125°
间距 (Pitch):	5.0mm
额定电流 (Current Rating):	20A - 25A
绝缘电阻 (Insulation Resistance):	100MΩ 最小值
接触电阻 (Contact Resistance) :	5mΩ (最初)




20.0*71.1*18.3mm

名称 (Name):	6P连接器
编码 (Code):	JHB00165(963357-5)
金属 (Metal):	黄铜电镀镍锡(Brass Tin)
极数 (Poles):	6* 3.0*0.8mm
原料 (Material):	PBT GF/UL-94 HB
温度范围 (Temperature):	-40° - 125°
间距 (Pitch):	5.0mm
额定电流 (Current Rating):	20A - 25A
绝缘电阻 (Insulation Resistance):	100MΩ 最小值
接触电阻 (Contact Rresistance) :	5mΩ (最初)




20.0*71.1*18.3mm


名称 (Name):	6P连接器
编码 (Code):	JHB00359(966140-5)
金属 (Metal):	黄铜电镀镍锡(Brass Tin)
极数 (Poles):	6* 3.0*0.8mm
原料 (Material):	PA66 GF/UL-94 V0
温度范围 (Temperature):	-40° - 125°
间距 (Pitch):	5.0mm
额定电流 (Current Rating):	20A - 25A
绝缘电阻 (Insulation Resistance):	100MΩ 最小值
接触电阻 (Contact Resistance) :	5mΩ (最初)


名称 (Name):	9P连接器
编码 (Code):	JHB00112(966140-4)
金属 (Metal):	黄铜电镀镍锡(Brass Tin)
极数 (Poles):	9* 3.0*0.8mm
原料 (Material):	PA66 GF/UL-94 V0
温度范围 (Temperature):	-40° - 125°
间距 (Pitch):	5.0mm
额定电流 (Current Rating):	20A - 25A
绝缘电阻 (Insulation Resistance):	100MΩ 最小值
接触电阻 (Contact Resistance):	5mΩ (最初)


名称 (Name):	12P连接器
编码 (Code):	JHB00315(966140-3)
金属 (Metal):	黄铜电镀镍锡(Brass Tin)
极数 (Poles):	12* 3.0*0.8mm
原料 (Material):	PA66 GF/UL-94 V0
温度范围 (Temperature):	-40° - 125°
间距 (Pitch):	5.0mm
额定电流 (Current Rating):	20A - 25A
绝缘电阻 (Insulation Resistance):	100MΩ 最小值
接触电阻 (Contact Resistance):	5mΩ (最初)


名称 (Name):	15P连接器
编码 (Code):	JHB00314(966140-2)
金属 (Metal):	黄铜电镀镍锡(Brass Tin)
极数 (Poles):	15* 3.0*0.8mm
原料 (Material):	PA66 GF/UL-94 V0
温度范围 (Temperature):	-40° - 125°
间距 (Pitch):	5.0mm
额定电流 (Current Rating):	20A - 25A
绝缘电阻 (Insulation Resistance):	100MΩ 最小值
接触电阻 (Contact Resistance):	5mΩ (最初)


名称 (Name):	18P连接器
编码 (Code):	JHB00316(966140-1)
金属 (Metal):	黄铜电镀镍锡(Brass Tin)
极数 (Poles):	18* 3.0*0.8mm
原料 (Material):	PA66 GF/UL-94 V0
温度范围 (Temperature):	-40° - 125°
间距 (Pitch):	5.0mm
额定电流 (Current Rating):	20A - 25A
绝缘电阻 (Insulation Resistance):	100MΩ 最小值
接触电阻 (Contact Resistance):	5mΩ (最初)


名称 (Name):	21P连接器
编码 (Code):	JHB00317(966140-6)
金属 (Metal):	黄铜电镀镍锡(Brass Tin)
极数 (Poles):	21* 3.0*0.8mm
原料 (Material):	PA66 GF/UL-94 V0
温度范围 (Temperature):	-40° - 125°
间距 (Pitch):	5.0mm
额定电流 (Current Rating):	20A - 25A
绝缘电阻 (Insulation Resistance):	100MΩ 最小值
接触电阻 (Contact Resistance):	5mΩ (最初)


名称 (Name):	8P连接器
编码 (Code):	JHB00505(1456468-1)
金属 (Metal):	黄铜电镀镍锡(Brass Tin)
极数 (Poles):	4* 0.64+4*2.3*0.6mm
原料 (Material):	PA66 GF/UL-94 V0
温度范围 (Temperature):	-40° - 125°
间距 (Pitch):	2.54mm
额定电流 (Current Rating):	2A /8A
绝缘电阻 (Insulation Resistance):	100MΩ 最小值
接触电阻 (Contact Resistance):	5mΩ (最初)


名称 (Name):	4P连接器 (白)
编码 (Code):	JHB00583
金属 (Metal):	黄铜电镀镍锡(Brass Tin)
极数 (Poles):	2* 6.3*0.8+2*2.8*0.8mm
原料 (Material):	PBT GF/UL-94 HB
温度范围 (Temperature):	-40° - 125°
间距 (Pitch):	3.75/2.75mm
额定电流 (Current Rating):	10A - 12A
绝缘电阻 (Insulation Resistance):	100MΩ 最小值
接触电阻 (Contact Resistance):	5mΩ (最初)

名称 (Name):	14P连接器 (白)
编码 (Code):	JHB00094(MG642868)
金属 (Metal):	黄铜电镀镍锡(Brass Tin)
极数 (Poles):	14* 2.2*0.6mm
原料 (Material):	PBT GF/UL-94 HB
温度范围 (Temperature):	-40° - 125°
间距 (Pitch):	4.0mm
额定电流 (Current Rating):	10A - 12A
绝缘电阻 (Insulation Resistance):	100MΩ 最小值
接触电阻 (Contact Resistance):	5mΩ (最初)


名称 (Name):	23P连接器
编码 (Code):	JHB00039(6098-3572)
金属 (Metal):	黄铜电镀镍锡(Brass Tin)
极数 (Poles):	4* 2.3*0.6+19* 1.0*0.6mm
原料 (Material):	PBT GF/UL-94 HB
温度范围 (Temperature):	-40° - 125°
间距 (Pitch):	2.4mm/3.5mm
额定电流 (Current Rating):	10A-12A/ 5A-8A
绝缘电阻 (Insulation Resistance):	100MΩ 最小值
接触电阻 (Contact Resistance):	5mΩ (最初)

名称 (Name):	20P连接器
编码 (Code):	JHB00108
金属 (Metal):	黄铜电镀镍锡(Brass Tin)
极数 (Poles):	6* 2.2*0.6+14* 1.0*0.6mm
原料 (Material):	PBT GF/UL-94 HB
温度范围 (Temperature):	-40° - 125°
间距 (Pitch):	2.54mm
适配说明 (Pitch):	1: 适配锐志/普拉多玻璃升降控制模块 2: 适用于汽车后装维修市场 3: 无匹配线端连接器及端子




16.5*46.0*21.6mm



名称 (Name):	22P连接器
编码 (Code):	JHB00126
金属 (Metal):	黄铜电镀镍锡(Brass Tin)
极数 (Poles):	22
原料 (Material):	ABS
温度范围 (Temperature):	-30° - 80°
间距 (Pitch):	3.0mm
适配说明 (Pitch):	1: 适配本田思域玻璃升降控制模块 2: 适用于汽车后装维修市场 3: 无匹配线端连接器及端子




28.0*65.6*19.3mm



名称 (Name):	13P连接器
编码 (Code):	JHB00048
金属 (Metal):	黄铜电镀镍锡(Brass Tin)
极数 (Poles):	13* 3.0*0.6mm
原料 (Material):	ABS/UL-94 V0
温度范围 (Temperature):	-30° - 80°
间距 (Pitch):	5.0mm
额定电流 (Current Rating):	15A - 18A
绝缘电阻 (Insulation Resistance):	100MΩ 最小值
接触电阻 (Contact Resistance):	5mΩ (最初)




25.3*40.0*20.0mm



名称 (Name):	24P连接器
编码 (Code):	JHB00070
金属 (Metal):	黄铜电镀镍锡(Brass Tin)
极数 (Poles):	24
原料 (Material):	ABS
温度范围 (Temperature):	-30° - 80°
间距 (Pitch):	3.4mm
适配说明 (Pitch):	1: 适配本田CRV玻璃升降控制模块 2: 适用于汽车后装维修市场 3: 无匹配线端连接器及端子




15.8*33.5*14.6mm



名称 (Name):	14P连接器
编码 (Code):	JHB00086(三合一)
金属 (Metal):	黄铜电镀镍锡(Brass Tin)
极数 (Poles):	6* 1.8*0.6+8* 1.0*0.6mm
原料 (Material):	PA6/UL-94 HB
温度范围 (Temperature):	-30° - 125°
间距 (Pitch):	2.5mm/3.5mm
额定电流 (Current Rating):	8A - 10A/5A - 8A
绝缘电阻 (Insulation Resistance):	100MΩ 最小值
接触电阻 (Contact Resistance):	5mΩ (最初)




32.1*41.4*25.0mm



名称 (Name):	26P连接器
编码 (Code):	JHB00124
金属 (Metal):	黄铜电镀镍锡(Brass Tin)
极数 (Poles):	26
原料 (Material):	ABS
温度范围 (Temperature):	-30° - 80°
间距 (Pitch):	2.2mm
适配说明 (Pitch):	1: 适配本田思域玻璃升降控制模块 2: 适用于汽车后装维修市场 3: 无匹配线端连接器及端子




28.3*73.0*20.5mm



名称 (Name):	16P连接器
编码 (Code):	JHB00040(二合一)
金属 (Metal):	黄铜电镀镍锡(Brass Tin)
极数 (Poles):	16* 2.3*0.6mm
原料 (Material):	PA6/UL-94 V0
温度范围 (Temperature):	-30° - 125°
间距 (Pitch):	4.0mm
额定电流 (Current Rating):	13A - 15A
绝缘电阻 (Insulation Resistance):	100MΩ 最小值
接触电阻 (Contact Resistance):	5mΩ (最初)




45.8*42.0*30.9mm




名称 (Name):	37P连接器
编码 (Code):	JHB00224
金属 (Metal):	黄铜电镀镍锡(Brass Tin)
极数 (Poles):	37
原料 (Material):	ABS
温度范围 (Temperature):	-30° - 80°
间距 (Pitch):	2.2mm
适配说明 (Pitch):	1: 适配八代雅阁玻璃升降控制模块 2: 适用于汽车后装维修市场 3: 无匹配线端连接器及端子




28.3*73.0*20.5mm



名称 (Name):	18P连接器
编码 (Code):	JHB00140(加长二合一)
金属 (Metal):	黄铜电镀镍锡(Brass Tin)
极数 (Poles):	18* 2.3*0.6mm
原料 (Material):	ABS GF/UL-94 V0
温度范围 (Temperature):	-30° - 80°
间距 (Pitch):	4.0mm
额定电流 (Current Rating):	13A - 15A
绝缘电阻 (Insulation Resistance):	100MΩ 最小值
接触电阻 (Contact Resistance):	5mΩ (最初)




25.5*42.0*22.3mm



名称 (Name):	37P连接器
编码 (Code):	JHB00064
金属 (Metal):	黄铜电镀镍锡(Brass Tin)
极数 (Poles):	37
原料 (Material):	ABS
温度范围 (Temperature):	-30° - 80°
间距 (Pitch):	2.2mm
适配说明 (Pitch):	1: 适配十代雅阁玻璃升降控制模块 2: 适用于汽车后装维修市场 3: 无匹配线端连接器及端子



24.6*72.0*24.8mm



名称 (Name):	22P连接器
编码 (Code):	JHB00028
金属 (Metal):	黄铜电镀镍锡(Brass Tin)
极数 (Poles):	16* 3.0*0.6+6* 1.0*0.6mm
原料 (Material):	PA66 GF/UL-94 V0
温度范围 (Temperature):	-40° - 125°
间距 (Pitch):	2.5mm/5.0mm
额定电流 (Current Rating):	15A - 18A/5A-8A
绝缘电阻 (Insulation Resistance):	100MΩ 最小值
接触电阻 (Contact Resistance):	5mΩ (最初)



24.6*80.6*24.8mm

名称 (Name):	36P连接器
编码 (Code):	JHB00552
金属 (Metal):	黄铜电镀镍锡(Brass Tin)
极数 (Poles):	12* 3.0*0.6+24* 1.0*0.6mm
原料 (Material):	PA66 GF/UL-94 V0
温度范围 (Temperature):	-40° - 125°
间距 (Pitch):	2.5mm/5.0mm
额定电流 (Current Rating):	15A - 18A/5A-8A
绝缘电阻 (Insulation Resistance):	100MΩ 最小值
接触电阻 (Contact Resistance) :	5mΩ (最初)



30.2*87.6*72.8mm

名称 (Name):	外壳
编码 (Code):	JHA00038
原料 (Material):	PA6 GF/UL-94 V0
温度范围 (Temperature):	-40° - 125°
名称 (Name):	上盖
编码 (Code):	JHA00039
原料 (Material):	PA6 GF/UL-94 V0
适配连接器 (Match Connector):	JHB00028



23.7*76.0*23.0mm

名称 (Name):	30P连接器
编码 (Code):	JHB00061
金属 (Metal):	黄铜电镀镍锡(Brass Tin)
极数 (Poles):	10* 3.0*0.6+20* 1.0*0.6mm
原料 (Material):	PBT GF/UL-94 HB
温度范围 (Temperature):	-40° - 125°
间距 (Pitch):	2.5mm/5.0mm
额定电流 (Current Rating):	15A - 18A/5A-8A
绝缘电阻 (Insulation Resistance):	100MΩ 最小值
接触电阻 (Contact Resistance) :	5mΩ (最初)



30.2*87.6*72.8mm

名称 (Name):	外壳
编码 (Code):	JHA00038
原料 (Material):	PA6 GF/UL-94 V0
温度范围 (Temperature):	-40° - 125°
名称 (Name):	上盖
编码 (Code):	JHA00237
原料 (Material):	PA6 GF/UL-94 V0
适配连接器 (Match Connector):	JHB00552



15.3*49.4*18.4mm

名称 (Name):	48P连接器
编码 (Code):	JHB00123
金属 (Metal):	黄铜电镀镍锡(Brass Tin)
极数 (Poles):	40* 0.64*0.64mm
原料 (Material):	PA6 GF/UL-94 V0
温度范围 (Temperature):	-40° - 125°
间距 (Pitch):	2.2mm
额定电流 (Current Rating):	2A - 3A
绝缘电阻 (Insulation Resistance):	100MΩ 最小值
接触电阻 (Contact Resistance) :	5mΩ (最初)



30.2*87.6*72.8mm

名称 (Name):	外壳
编码 (Code):	JHA00038
原料 (Material):	PA6 GF/UL-94 V0
温度范围 (Temperature):	-40° - 125°
名称 (Name):	14P连接器 (带盖)
编码 (Code):	JHB00318
原料 (Material):	PA66 GF/UL-94 V0
温度范围 (Temperature):	-40° - 125°



30.0*105.7*26.1mm

名称 (Name):	48P连接器
编码 (Code):	JHB00332
金属 (Metal):	黄铜电镀镍锡(Brass Tin)
极数 (Poles):	8* 3.0*0.6+40* 0.64*0.64mm
原料 (Material):	PA66 GF/UL-94 V0
温度范围 (Temperature):	-40° - 125°
间距 (Pitch):	2.5mm/6.0mm
额定电流 (Current Rating):	15A - 18A/5A-8A
绝缘电阻 (Insulation Resistance):	100MΩ 最小值
接触电阻 (Contact Resistance) :	5mΩ (最初)




30.2*87.6*72.8mm

名称 (Name):	外壳
编码 (Code):	JHA00038
原料 (Material):	PA6 GF/UL-94 V0
温度范围 (Temperature):	-40° - 125°
名称 (Name):	23P连接器 (带盖)
编码 (Code):	JHB00319
原料 (Material):	PA66 GF/UL-94 V0
温度范围 (Temperature):	-40° - 125°



19.6*60.5*16.2mm

名称 (Name):	56P连接器
编码 (Code):	JHB00392
金属 (Metal):	黄铜电镀镍锡(Brass Tin)
极数 (Poles):	40* 0.64*0.64mm
原料 (Material):	PA66 GF/UL-94 V0
温度范围 (Temperature):	-40° - 125°
间距 (Pitch):	2.2mm
额定电流 (Current Rating):	2A - 3A
绝缘电阻 (Insulation Resistance):	100MΩ 最小值
接触电阻 (Contact Resistance) :	5mΩ (最初)

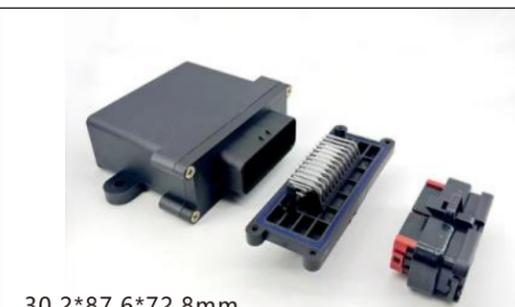

30.2*87.6*72.8mm

名称 (Name):	外壳
编码 (Code):	JHA00038
原料 (Material):	PA6 GF/UL-94 V0
温度范围 (Temperature):	-40° - 125°
名称 (Name):	35P连接器 (带盖)
编码 (Code):	JHB00511
原料 (Material):	PA66 GF/UL-94 V0
温度范围 (Temperature):	-40° - 125°



名称 (Name):	踏步机外壳
编码 (Code):	JHA00370
原料 (Material):	PA6 GF/UL-94 V0
温度范围 (Temperature):	-40° - 125°
名称 (Name):	上盖
编码 (Code):	JHA00371
原料 (Material):	PA6 GF/UL-94 V0
适配连接器 (Match Connector):	Pg接头出口

74.2*127*24.0mm



名称 (Name):	外壳
编码 (Code):	JHA00087
原料 (Material):	ABS/UL-94 V0
温度范围 (Temperature):	-30° - 80°
名称 (Name):	13P连接器
编码 (Code):	JHB00048
原料 (Material):	ABS/UL-94 V0
适配连接器 (Match Connector):	JHA00262

28.0*66.0*78.0mm



名称 (Name):	外壳
编码 (Code):	JHA00270
原料 (Material):	PA6 GF/UL-94 V0
温度范围 (Temperature):	-40° - 125°
名称 (Name):	上盖
编码 (Code):	JHA00271
原料 (Material):	PA6 GF/UL-94 V0
适配连接器 (Match Connector):	JHB00045/JHB00046/JHB00047

85.5*196*36mm



名称 (Name):	外壳
编码 (Code):	JHA00180
原料 (Material):	PA6 GF/UL-94 V0
温度范围 (Temperature):	-40° - 125°
名称 (Name):	上盖
编码 (Code):	JHA00181
原料 (Material):	Pa66 GF/UL-94 V0
适配连接器 (Match Connector):	28P连接器

68.3*103.8*27.7mm



名称 (Name):	外壳
编码 (Code):	JHA00127
原料 (Material):	ABS/UL-94 V0
温度范围 (Temperature):	-30° - 150°
名称 (Name):	上盖
编码 (Code):	JHA00128
原料 (Material):	ABS/UL-94 V0
适配连接器 (Match Connector):	JHB00552

31.8*158*83.0mm



名称 (Name):	外壳
编码 (Code):	JHA00233
原料 (Material):	ABS/UL-94 V0
温度范围 (Temperature):	-40° - 125°
名称 (Name):	上盖
编码 (Code):	JHA00234
原料 (Material):	ABS/UL-94 V0
适配连接器 (Match Connector):	34P连接器

127*120*36.0mm



名称 (Name):	外壳
编码 (Code):	JHA00105
原料 (Material):	PA6 GF/UL-94 V0
温度范围 (Temperature):	-30° - 150°
名称 (Name):	上盖
编码 (Code):	JHA00239
原料 (Material):	PA6 GF/UL-94 V0
适配连接器 (Match Connector):	JHB00086

27.4*67.6*48.5mm



名称 (Name):	上盖
编码 (Code):	JHA00034
原料 (Material):	ABS/PC-UL-94 V0
温度范围 (Temperature):	-30° - 105°
名称 (Name):	下盖
编码 (Code):	JHA00035
原料 (Material):	ABS/PC-UL-94 V0
适配连接器 (Match Connector):	JHB00104/JHB00137

100*130*36.0mm



名称 (Name):	外壳
编码 (Code):	JHA00105
原料 (Material):	PA6 GF/UL-94 V0
温度范围 (Temperature):	-30° - 125°
名称 (Name):	16P连接器
编码 (Code):	JHB00040
原料 (Material):	PA6 GF/UL-94 V0
温度范围 (Temperature):	-30° - 125°

27.4*67.6*48.5mm



名称 (Name):	上盖+主体
编码 (Code):	JHA00415+JHA00416
原料 (Material):	Pa66 GF/UL-94 V0
温度范围 (Temperature):	-40° - 125°
适配连接器 (Match Connector):	22P连接器 (JHB00349)
适配连接器 (Match Connector):	24P连接器 (JHB00350)
适配连接器 (Match Connector):	32P连接器 (JHB00351)
适配连接器 (Match Connector):	48P连接器 (JHB00352)

165*150*28.1mm

全自动连接器插装机



河南金华电气有限公司
电话：18803921718 (微信同号)
邮箱：18803921718@163.com
网址：www.hnjhdq.com
工厂地址：河南省鹤壁市山城区铁东路

金华电气深圳分公司
电话：13631516650 (微信同号)
邮箱：tw13631516650@163.com
地址：深圳市龙华区龙华大道昌龙路鸿宇大厦932



汽车连接器产品目录

AUTOMOTIVE CONNECTOR PRODUCT CATALOG



公司简介 ENTERPRISE INTRODUCTION

产品目录 PRODUCT CATALOG

河南金华电气有限公司(原鹤壁市天万电子有限公司, 成立于2012年)位于河南省鹤壁市山城区铁东路。是一家专业从事汽车连接器、接插件、汽车线束、汽车配件等研发、生产和销售的现代化企业公司。

金华电气致力于自主创新, 被评为“国家科技型中小型企业”, 已获授权22项国家专利技术(汽车连接器方向); 同时重视产品质量和环境保护, 通过IATF16949质量管理体系和ISO14001环境管理体系。

金华电气有员工100余名, 生产车间约10000平方米, 拥有自动化注塑生产车间, 全自动插装装配车间。生产设备有海天牌精密数控注塑机、全自动插装生产线, 全自动数控压接机、半自动压接设备和精密模具、夹具等。同时拥有数控机床、中走丝、电火花、数控磨床等模具加工设备, 以及高低温试验箱、盐雾试验箱、燃烧试验箱、二次元测试仪、数控拉力计、冲击强度测试箱、防水试验箱、微电阻测试仪、电流测试仪等检测设备。金华电气生产的精密连接器、端子、护套、线束等系列产品, 广泛应用在一汽红旗、理想汽车、东风汽车、吉利汽车、长安汽车、长城汽车、福田汽车、江淮、重汽、陕汽、徐工等国内知名品牌, 并出口东南亚、中东及欧美等国。

金华电气在未来将继续以实现客户的满意和成功为目标, 致力于为客户提供高品质的产品和服务, 为中国汽车连接器的创新与腾飞做出应有的贡献!

Henan Jinhua Electric Co., Ltd. (formerly Hebi Tianwan Electronics Co., Ltd., established in 2012) is located in Tiedong Road, Shancheng District, Hebi City, Henan Province. It is a modern enterprise company specializing in the R & D, production and sales of automobile connectors, connectors, automobile harnesses and auto parts.

Jinhua Electric is committed to independent innovation, has been rated as "National Science and technology-based small and medium-sized enterprise", and has been authorized 15 national patent technologies (automobile connector direction); At the same time, pay attention to product quality and environmental protection, and pass iatf16949 quality management system and ISO14001 environmental management system.

Jinhua Electric has more than 100 employees, 13000 square meters of production workshop, automatic injection molding production workshop and automatic plug-in assembly workshop. Production equipment includes Haitian brand precision CNC injection molding machine, full-automatic insertion production line, full-automatic CNC crimping machine, semi-automatic crimping equipment, precision molds and fixtures, etc. At the same time, it has CNC machine tools, medium wire walking, EDM, CNC grinder and other mold processing equipment, as well as high and low temperature test chamber, salt spray test chamber, combustion test chamber, secondary element tester, CNC tension meter, impact strength test chamber, waterproof test chamber, micro resistance tester, current tester and other testing equipment. The precision connectors, terminals, sheaths, wire harnesses and other products produced by Jinhua Electric are widely used in domestic well-known brands such as FAW Hongqi, Dongfeng Motor, Geely motor, Chang'an Motor, Great Wall Motor, Futian motor, JAC, heavy truck, Shaanxi Auto, XCMG, and exported to Southeast Asia, the Middle East, Europe and the United States.

Jinhua Electric will continue to take customer satisfaction and success as the goal in the future, devote itself to providing customers with high-quality products and services, and make due contributions to the innovation and take-off of China's automobile connectors!

01 / 02

企业简介/目录
Company Profile/Catalogue

产品研发/企业荣誉
Product Research/Honor

03 / 04

05 / 06

质量控制
Quality Control

产品应用
Application Case

07 / 08

09 / 18

防水板端连接器
Waterproof Connectors

064板端连接器
064 Pcb Header Connectors

19 / 21

22 / 24

简易排插/1.0板端连接器
1.0 Pcb Header Connectors

1.8/3.0板端连接器
1.8/3.0 Header Connectors

25 / 34

玻璃升降控制模块板端连接器
Glass Lifter Connectors

35 / 36

37 / 38

定制板端连接器
Custom Header Connectors

定制塑胶外壳
Custom Plastic Shell

39 / 40

应用案例


APPLICATION CASE

汽车产品配套说明

Description of car products

金华电气属于汽车产业链的二级或三级配套供应商。生产的产品并不直接供应给汽车工厂，而是组装在客户（多为生产汽车电子产品，控制模组产品的厂商）产品上，销售给以下客户。

inhua Electric is a secondary or tertiary supporting supplier in the automotive industry chain. The products produced are not directly supplied to automobile factories, but are assembled on the products of customers (mostly manufacturers of automotive electronic products and control module products) and sold to the following customers.

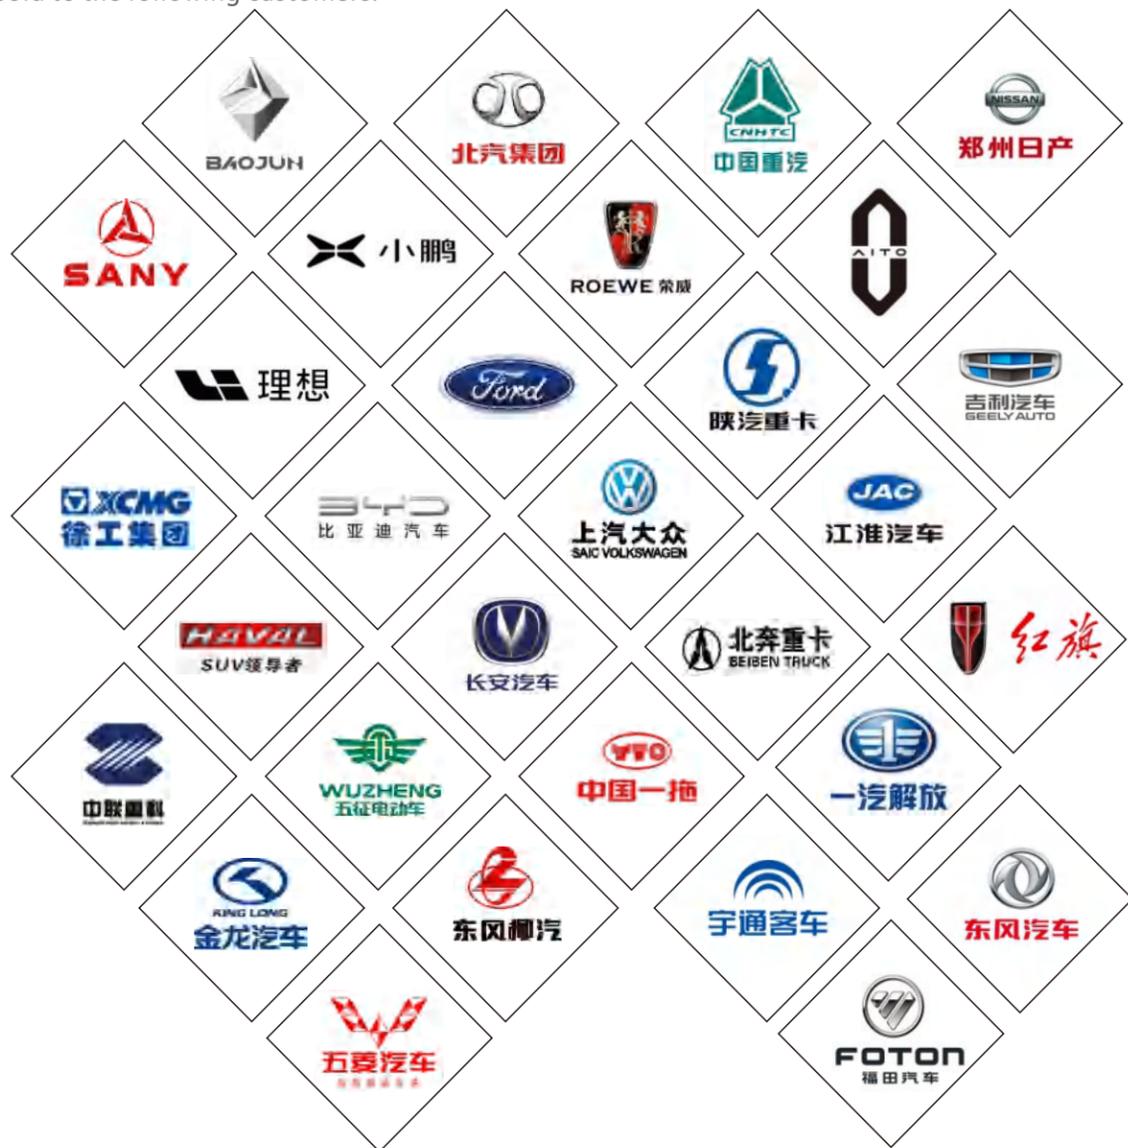

公司专利荣誉

COMPANY PATENT HONOR





国家认可的CNAS实验室

模具 冲压 注塑 装配 全工序工厂



模具车间

Die shop

金华电气投资的模具车间均为国际或国内知名品牌设备，拥有慢丝线切割机，电火花机、加工中心、高精度磨床等，可以完成从模具的设计、模流分析、制造、调试等全工序。

The mold workshops invested by Jinhua Electric are all internationally or domestically renowned brand equipment, equipped with slow wire cutting machines, electric discharge machines, machining centers, high-precision grinders, etc., which can complete the entire process from mold design, mold flow analysis, manufacturing, debugging, etc.



金华电气投资的冲压车间均为全自动冲床。可以完成金属端子的冲压，在线检测，计数等功能。给客户交付电镀完成的金属端子。

The stamping workshops invested by Jinhua Electric are all fully automatic punching machines. It can complete functions such as stamping, online detection, and counting of metal terminals. Deliver electroplated metal terminals to customers.



冲压车间

Stamping Workshop



注塑车间

Injection Molding Workshop

金华电气的注塑车间为海天注塑机，配以全自动机械手、三位一体烘干除湿机。使用国际知名品牌塑胶颗粒，按照IATF16949质量体系运行.保证质量。
Jinhua Electric's injection molding workshop uses Haitian injection molding machines, equipped with fully automatic robotic arms and a three in one drying and dehumidification machine. Use internationally renowned brand plastic pellets and operate according to the IATF16949 quality system to ensure quality.



金华电气的装配车间为封闭式洁净车间。拥有全自动生产线、半自动电动/气动生产线和手动生产线。符合日均产能5万套汽车连接器的产能要求。

The assembly workshop of Jinhua Electric is a closed clean workshop. We have fully automated production lines, semi-automatic electric/pneumatic production lines, and manual production lines. Meet the production capacity requirement of 50000 sets of automotive connectors per day.



装配车间

assembling shop



国家认可的CNAS实验室

CNAS laboratories accredited by the state

金华电气投资的第三方实验室拥有CMA和CNAS双证。实验室可以为汽车连接器、汽车线束、汽车保险丝盒等产品的出具机械试验、电子性能实验、复合环境实验等项目的实验报告。

The third-party laboratory invested by Jinhua Electric has both CMA and CNAS certifications. The laboratory can provide experimental reports for mechanical testing, electronic performance testing, composite environment testing, and other projects related to automotive connectors, automotive wiring harnesses, automotive fuse boxes, and other products.



产品目录清单



进口号	282079-1	进口号	282080-1	进口号	282087-1	进口号	282088-1
型号	DJ7011-1.5-21	型号	DJ7021-1.5-21	型号	DJ7031-1.5-21	型号	DJ7041-1.5-21



进口号	282103-1	进口号	282104-1	进口号	282105-1	进口号	282106-1
型号	DJ7011-1.5-11	型号	DJ7021-1.5-11	型号	DJ7031-1.5-11	型号	DJ7041-1.5-11



进口号	282089-1	进口号	282090-1	进口号	282107-1	进口号	282108-1
型号	DJ7051-1.5-21	型号	DJ7061-1.5-21	型号	DJ7051-1.5-11	型号	DJ701-1.5-11



进口号	282192-1	进口号	282191-1	进口号	282189-1	进口号	282189-6
型号	DJ7043-3.5-21	型号	DJ7033-3.5-21	型号	DJ7023-3.5-21	型号	DJ7024-3.5-21



进口号	1928403966	进口号	1928403968	进口号	1928404073	进口号	1928403698	进口号	1928403874
型号	DJ7036A-3.5-21	型号	DJ7036B-3.5-21	型号	DJ7035A-3.5-21	型号	DJ7026A-3.5-21	型号	DJ7036B-3.5-21



进口号	1473672-1	进口号	1376352-1	进口号	1376352-2	进口号	1318774-1	进口号	
型号	DJ7041S-0.7-21	型号	DJ7081S-0.7-21	型号	DJ7081S-0.7-21 黑色	型号	DJ7121S-0.7-21	型号	0220-413NR




进口号	1318386-1	进口号	1318917-1	进口号	1565380-1	进口号	1318747-1	进口号	1318389-1
型号	DJ7161S-0.7-21-W	型号	DJ7241S-0.7-21	型号	DJ7281S-0.7-21	型号	DJ7321S-0.7-21	型号	DJ401S-0.7-21



进口号	1565804-1	进口号		进口号		进口号	1473407-1	进口号	1473410-1
型号		型号		型号		型号		型号	



进口号	6098-5071	进口号	6098-5070	进口号	9-1452577-1	进口号	9-968554-1	进口号	1473413-1
型号		型号		型号		型号		型号	

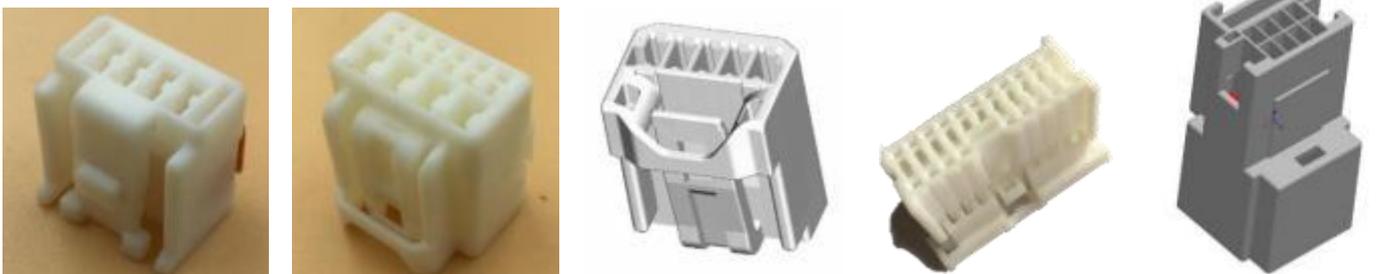

进口号	6098-2013	进口号	7283-1556	进口号	7283-5830	进口号	1123379-1	进口号	30968-1080
型号		型号		型号		型号		型号	


产品目录清单



进口号	211PC022S5149	进口号	211PC022S0149	进口号	211PC022S1149	进口号	211PL022S0049
型号	DJ7024G-1.5-21	型号	DJ7024-1.5-21	型号	DJ7024L-1.5-21	型号	DJ7024-1.5-11



进口号	211PC042S4021	进口号	FCI902970-00	进口号	211PL042S0011	进口号	12162260	进口号	
型号	DJ7044-1.5-21	型号	DJ7064J-1.5-21	型号	DJ7044-1.5-11	型号	DJ7064J-1.2-21	型号	DJ7054J-1.2-21



进口号	54200200N	进口号	54200207	进口号	15419715	进口号	15329073/15329074
型号		型号		型号		型号	




进口号	12065172	进口号	12186568	进口号	12160482	进口号	15300027
型号		型号		型号		型号	




进口号	12065171	进口号	12162343	进口号	12162102	进口号	1544334-1	进口号	15326655
-----	----------	-----	----------	-----	----------	-----	-----------	-----	----------

型号									
----	--	----	--	----	--	----	--	----	--




产品目录清单



进口号	936124-1	进口号	175507-2	进口号	179057-6	进口号	179054-1
型号		型号		型号		型号	



进口号	827603-1	进口号	282994-2	进口号	MG620055	进口号	MG620153
型号		型号		型号		型号	



进口号	MG620268	进口号	MG620838	进口号	MG610837	进口号	MG653198
型号		型号		型号		型号	



进口号	6098-2680	进口号	6240-0538	进口号	6249-1249	进口号	6098-2679
型号		型号		型号		型号	



进口号	927365-1	进口号	927366-1	进口号	927367-1	进口号	927368-1
-----	----------	-----	----------	-----	----------	-----	----------

型号		型号		型号		型号	
----	--	----	--	----	--	----	--


产品目录清单



进口号	0306-1023	进口号		进口号		进口号	184246-1
型号		型号		型号		型号	



进口号	174257-2	进口号	2822346-1/881779-1	进口号	174259-2	进口号	174264-2
型号		型号		型号		型号	



进口号	MX19002S51	进口号	MX19002P52	进口号	MX19004S51	进口号	MX19004P51
型号		型号		型号		型号	



进口号	917319-4/2822344-1	进口号	6187-2171	进口号	2822344-1	进口号	2822343-1
型号		型号		型号		型号	



进口号	174044-2	进口号	174045-2	进口号	174046-2	进口号	174047-2
型号		型号		型号		型号	

产品目录清单



进口号		进口号	6189-0132	进口号	6181-0073	进口号	6189-0133
型号		型号		型号		型号	



进口号	6188-0517	进口号	7222-6423-30	进口号		进口号	6189-0935
型号		型号		型号		型号	




进口号	1534159	进口号		进口号		进口号	
型号		型号		型号		型号	0108-184




进口号	964449-1	进口号	965423-1	国内号	182916	国内号	213893
型号		型号		型号		型号	

产品目录清单

167

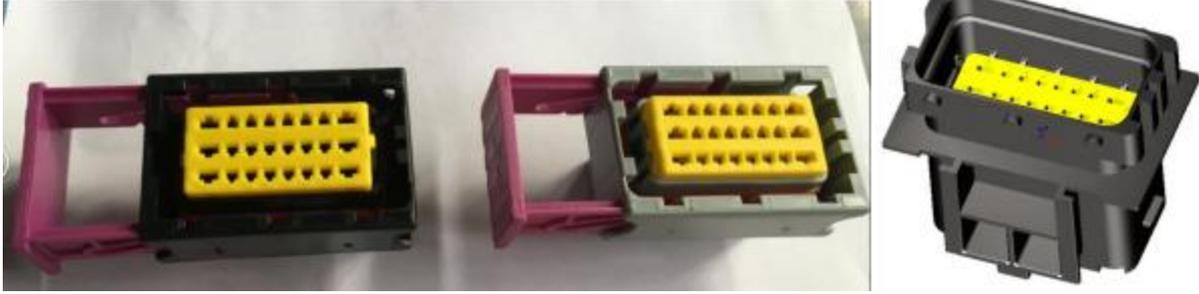

进口号	211PC249S0005	进口号	211PC249S8005	进口号	211PL249S0020
型号		型号		型号	

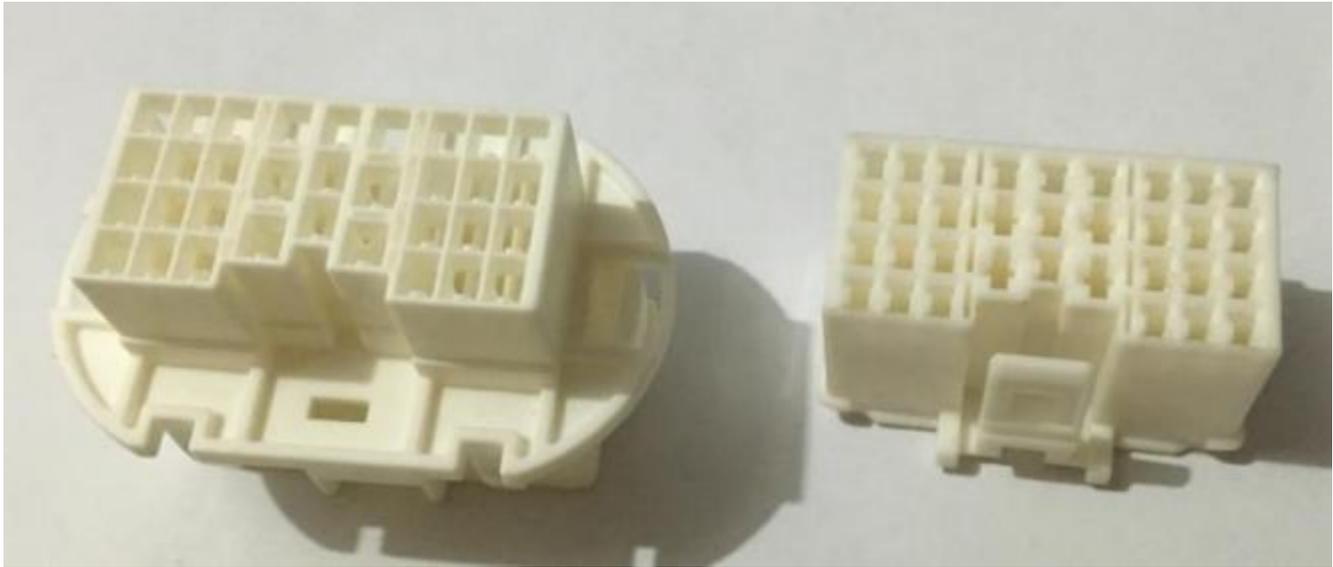

进口号	936280-1	进口号	936283-3
型号		型号	



进口号	936421-2	进口号	936429-2
型号		型号	

产品目录清单



进口号	776164-1	进口号	776164-2	进口号	776164-4	进口号	776164-5
型号		型号		型号		型号	



进口号	770680-1	进口号	770680-2	进口号	770680-4	进口号	770680-5
型号		型号		型号		型号	



进口号	776273-1	进口号	776273-2	进口号	776273-4	进口号	776273-5
型号		型号		型号		型号	



进口号	776286-1	进口号	776286-2
型号		型号	

产品目录清单



进口号	1-1418883-1	进口号	2-1418883-1
型号		型号	



进口号	1418882-1	进口号	1-1394453-1
型号		型号	




进口号	PPI0001494/PPI0001495	进口号	PPI0001524
型号		型号	

产品目录清单




1

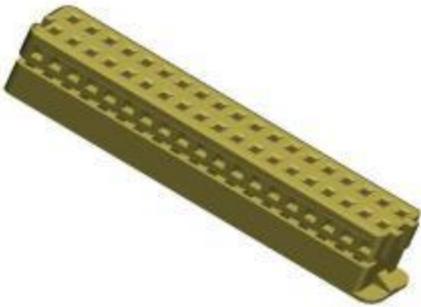

2




3

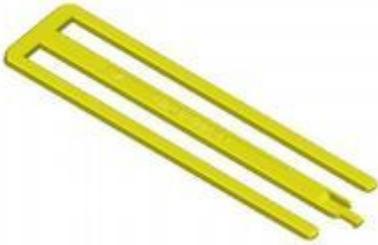

4



5

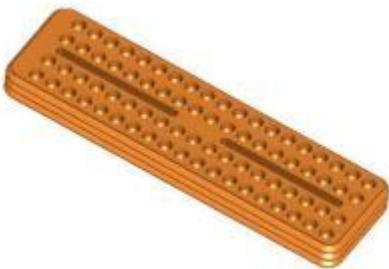

6




7

序号	产品名称	进口型号	型号	颜色
1	主体	368290-1		黑
2	黄内芯	368294-1		灰黄
3	黑内芯	368293-1		黑
4	长卡锁	368297-1		黄
5	盖子	368333-1		黑
6	橡胶堵			桔红
7	胶盖			黑

产品目录清单



进口号	1473284-1/1473284-2	进口号	1718358-1	进口号	7283-8630	进口号	68145-0815
型号		型号		型号		型号	



进口号	1897695-3	进口号	963121-1	进口号	963120-1	进口号	184032-1
型号		型号		型号		型号	



进口号		进口号	6188-4775	进口号	6189-0368/309406083AAB	进口号	60402501/1J0906233
型号		型号		型号		型号	



进口号		进口号	KH1200043	进口号	1J0973713	进口号	15435618
型号		型号		型号		型号	



进口号	6098-7357	进口号	6098-7360/6098-7364	进口号		进口号	7123-1729
型号		型号		型号		型号	

产品目录清单




进口号	936098-1	进口号	936133-1	进口号	936151-1	进口号	936154-1
型号		型号		型号		型号	



进口号	936095-1	进口号	936131-1	进口号	936204-1	进口号	936213-1
型号		型号		型号		型号	



进口号	936201-1	进口号	936211-1	进口号	936199-1	进口号	936209-1
型号		型号		型号		型号	



进口号	175658-1	进口号	173850-1	进口号	174465-1	进口号	173851-1	进口号	173852-1
型号		型号		型号		型号		型号	

产品目录清单



进口号	1-1813099-1	进口号	2-1813099-1	进口号	3-1813099-1	进口号	1-1813099-2	进口号	2-1813099-2
型号		型号		型号		型号		型号	



进口号	3-1813099-2	进口号	1-1813099-3	进口号	2-1813099-3	进口号	3-1813099-3	进口号	638245-1
型号		型号		型号		型号		型号	



进口号	MG640280-5	进口号	MG610278-5	进口号		进口号	MG651050	进口号	13651345
型号		型号		型号		型号		型号	



进口号	1-967644-1	进口号	1-967642-1	进口号	15326808	进口号	DT04-2P	进口号	DT06-2P
型号		型号		型号		型号		型号	




进口号	1-1419168-1	进口号	1411001-1	进口号	1438031-1	进口号	1488533-5	进口号	1488533-6
型号		型号		型号		型号		型号	

产品目录清单




进口号	1-1564330-1	进口号	2-1564330-1	进口号	3-1564330-1	说明：内芯与黄卡模具 428-1/2
型号		型号		型号		

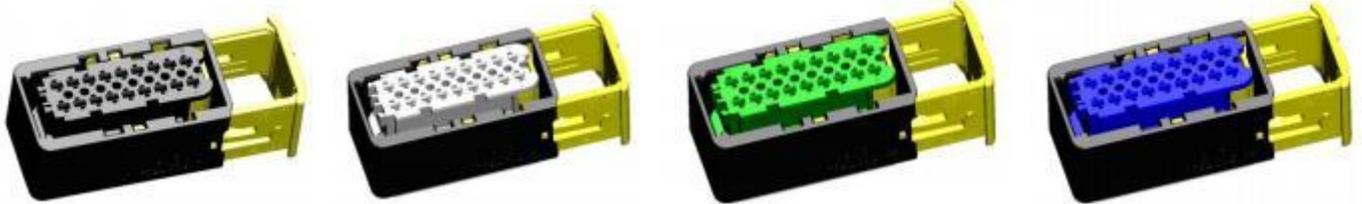


进口号	1-1563759-1	进口号	2-1563759-1	进口号	3-1563759-1	进口号	4-1563759-1
型号		型号		型号		型号	



进口号	1-1564337-1	进口号	2-1564337-1	进口号	3-1564337-1	进口号	4-1564337-1
型号		型号		型号		型号	

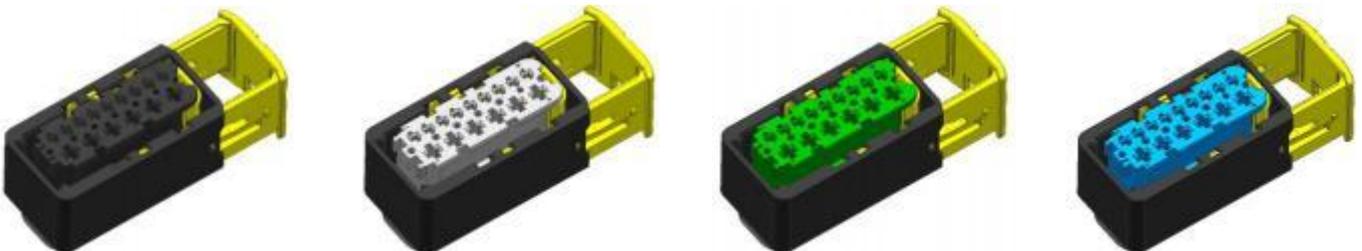


进口号	1-1563878-1	进口号	2-1563878-1	进口号	3-1563878-1	进口号	4-1563878-1
型号		型号		型号		型号	

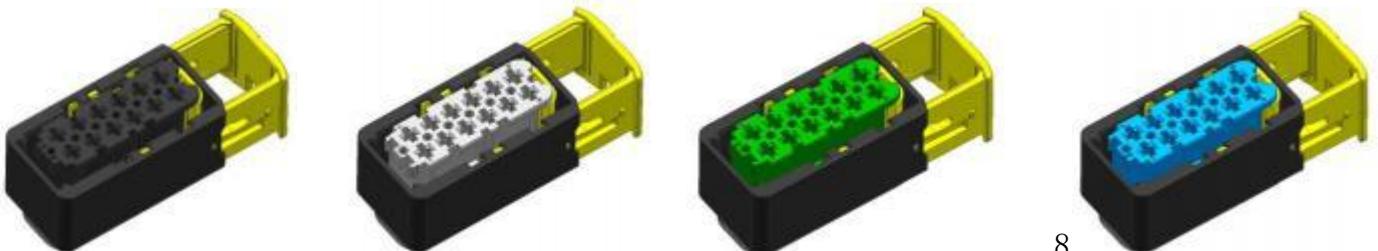

8

进口号	1-1670901-1	进口号	2-1670901-1	进口号	3-1670901-1	进口号	4-1670901-1
型号		型号		型号		型号	



产品目录清单



进口号	1-1703639-1	进口号	2-1703639-1	进口号	3-1703639-1	进口号	4-1703639-1
型号		型号		型号		型号	



进口号	1-1564514-1	进口号	2-1564514-1	进口号	3-1564514-1	进口号	4-1564514-1
型号		型号		型号		型号	



进口号	1-1670894-1	进口号	2-1670894-1	进口号	3-1670894-1	进口号	4-1670894-1
型号		型号		型号		型号	



进口号	1-1418479-1	进口号	2-1418479-1	进口号	3-1418479-1	进口号	4-1418479-1
型号		型号		型号		型号	



进口号	1-1418437-1	进口号	2-1418437-1	进口号	3-1418437-1	进口号	4-1418437-1
型号		型号		型号		型号	

产品目录清单



进口号	1-1564542-1	进口号	2-1564542-1	进口号	3-1564542-1	说明：内芯与卡子模具 427-1/-2
型号		型号		型号		




进口号	1-1418480-1	进口号	2-1418480-1	进口号	3-1418480-1	进口号	4-1418480-1
型号		型号		型号		型号	



进口号	1-1418469-1	进口号	2-1418469-1	进口号	3-1418469-1	进口号	4-1418469-1
型号		型号		型号		型号	



进口号	1-1418390-1	进口号	2-1418390-1	进口号	3-1418390-1	进口号	4-1418390-1
型号		型号		型号		型号	




进口号	1-1418483-1	进口号	2-1418483-1	进口号	3-1418483-1	进口号	4-1418483-1
型号		型号		型号		型号	

产品目录清单



进口号	1-1418448-2	进口号	2-1418448-2	进口号	3-1418448-2	进口号	4-1418448-2
型号		型号		型号		型号	0202-331-1.5BL

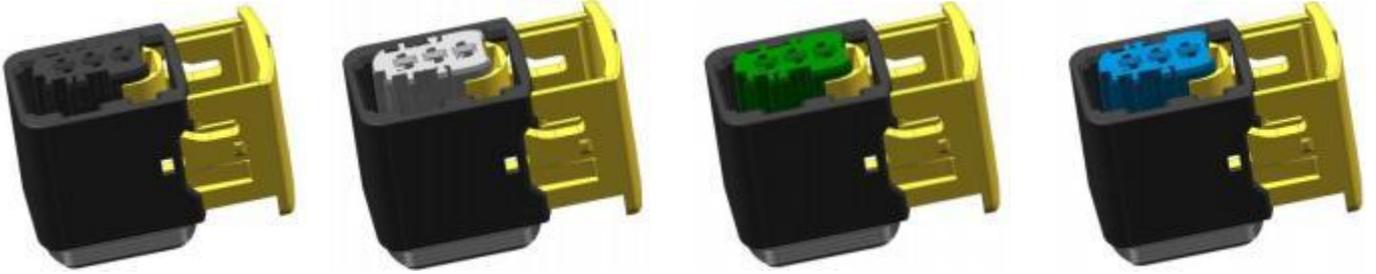

进口号	1-1418448-1	进口号	2-1418448-1	进口号	3-1418448-1	进口号	4-1418448-1
型号	0203-331BK	型号	0203-331GY	型号	0203-331GN	型号	0203-331BL



进口号	1-1564526-1	进口号	2-1564526-1	进口号	1-1564412-1	进口号	2-1564412-1
型号	0118-316BK	型号	0118-316GY	型号	0118-316BK-N	型号	0118-316GY-N




进口号	1-1564407-1	进口号	2-1564407-1	进口号	1-1564528-1	进口号	2-1564528-1
型号	0116-316BK	型号	0116-316GY	型号	0116-316BK-N	型号	0116-316GY-N



进口号	1-1564520-1	进口号	2-1564520-1	进口号	1-1564414-1	进口号	2-1564414-1
型号	0112-319BK	型号	0112-319GY	型号	0112-319BK-N	型号	0112-319GY-N


产品目录清

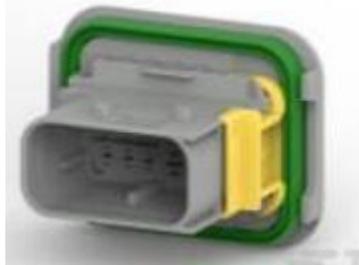

进口号	1-1564518-1	进口号	2-1564518-1	进口号	1-1564516-1	进口号	2-1564516-1
型号	0110-319BK	型号	0110-319GY	型号	0110-319BK-N	型号	0110-319GY-N



进口号	1-1564522-1	进口号	2-1564522-1	进口号	3-1564522-1	进口号	4-1564522-1
型号	0108-319BK-N	型号	0108-319GY-N	型号	0108-319GN-N	型号	0108-319BL-N







进口号	1-1564416-1	进口号	2-1564416-1	进口号	1-1564512-1	进口号	2-1564512-1
型号	0108-317BK	型号	0108-317GY	型号	0108-317BK-N	型号	0108-317GY-N





进口号	1-1670214-1	进口号	2-1670214-1	进口号	1-1703648-1	进口号	2-1703648-1
型号	0107-317BK	型号	0107-317GY	型号	0107-317BK-N	型号	0107-317GY-N


产品目录清单

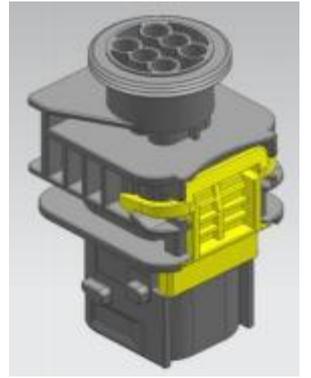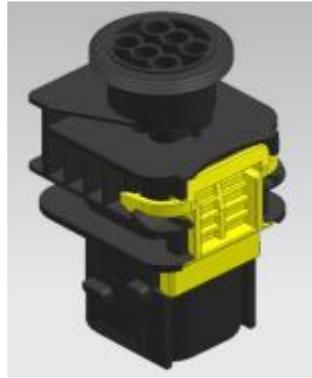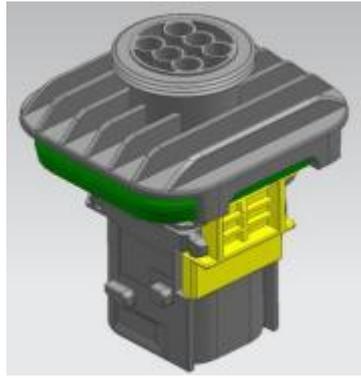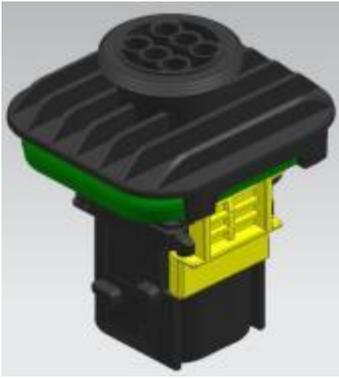




进口号	1-1703820-1	进口号	2-1703820-1	进口号	1-1703773-1	进口号	2-1703773-1
型号	0106-310BK	型号	0106-310GY	型号	0106-310BK-N	型号	0106-310GY-N

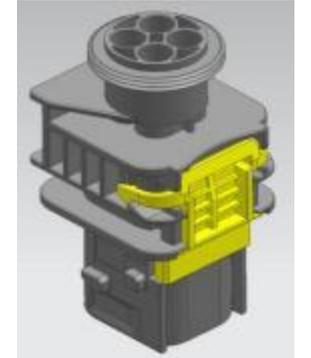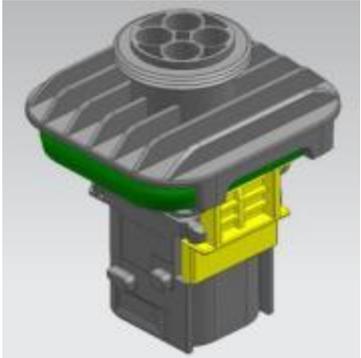

进口号	1-1703808-1	进口号	2-1703808-1	进口号	1-1703818-1	进口号	2-1703818-1
型号	0104-310BK	型号	0104-310GY	型号	0104-310BK-N	型号	0104-310GY-N

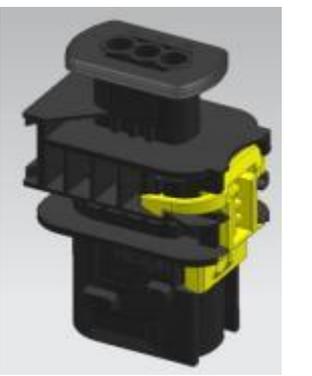

进口号	1-1703843-1	进口号	2-1703843-1	进口号	1-1670730-1	进口号	
型号	0103-339BK	型号	0103-339GY	型号	0103-339BK-N	型号	

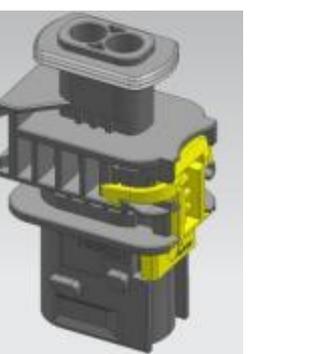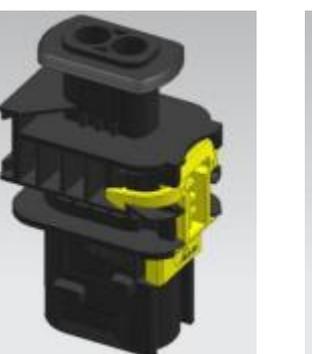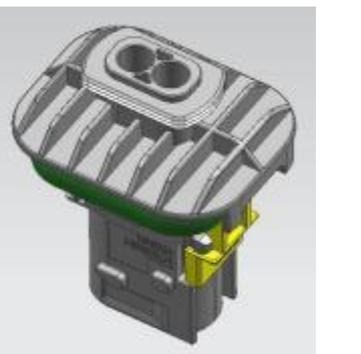

进口号	1-1703841-1	进口号	2-1703841-1	进口号	1-1703839-1	进口号	2-1703839-1
型号	0102-339BK	型号	0102-339GY	型号	0102-339BK-N	型号	0102-339GY-N

产品目录清单



进口号	1703838-1	进口号	1703810-1	进口号	1670720-1	进口号	1564562-1	进口号	1564411-1
型号	3339YE-03	型号		型号		型号	3314YE-01	型号	3313YE-01



进口号	1703838-2	进口号	1703810-2	进口号	1670720-2	进口号	1564562-2	进口号	1564411-2
型号	3339RE-03	型号		型号		型号	3314 RE -01	型号	3313 RE -01



进口号	1670365-1	进口号	1670150-1	进口号	1670364-1	进口号	1670057-1
型号	3432-01	型号	3339-05	型号	3431-01	型号	3369-01



进口号	1563111-1	进口号	1563110-1	进口号	1670866-1	进口号	1670865-1
型号	3433-01	型号	3058-06	型号	3434-01	型号	3316-05



进口号	967640-1	进口号	1554461-2	进口号	1928404669	进口号	213894-2
型号	0204-424BK	型号	WT33-001BK	型号	0206-301	型号	0210-229



进口号	174929-1	进口号		进口号		进口号	
型号	0104-322	型号	0202-067	型号	0104-179	型号	0201-211


产品目录清单




进口号	MX23A34SF1 MX23A34XF1	进口号	MX23A26SF1 MX23A26XF1	进口号	MX23A18SF1 MX23A18XF1	进口号	1-2112757-1 0-1670789-1
型号	0234-356	型号	0226-384	型号	0218-383	型号	WT18-002BK/WT18-004RE



进口号	13572498	进口号	13534591	进口号	6098-8828	进口号	1418507-2
型号	0208-379BK	型号	0114-390	型号	0116-389	型号	0204-388

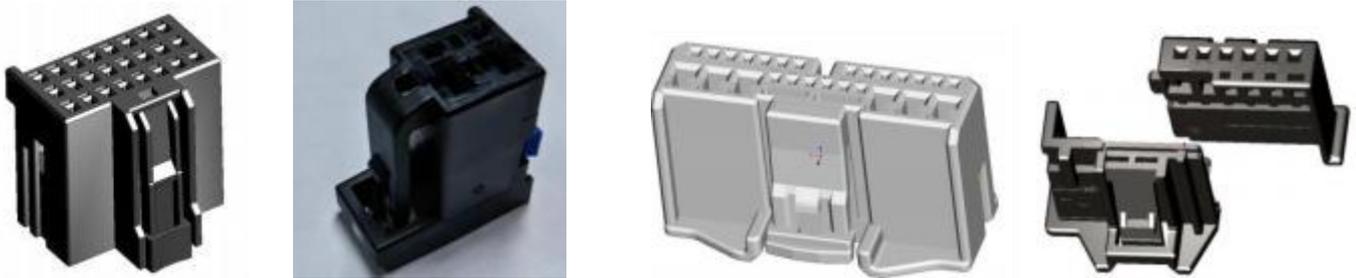

进口号		进口号	33146412	进口号	1376360-1	进口号	969489-1/1355081-1
型号	0224-397	型号	0204-414BK	型号	0226-418NR	型号	W0206-001

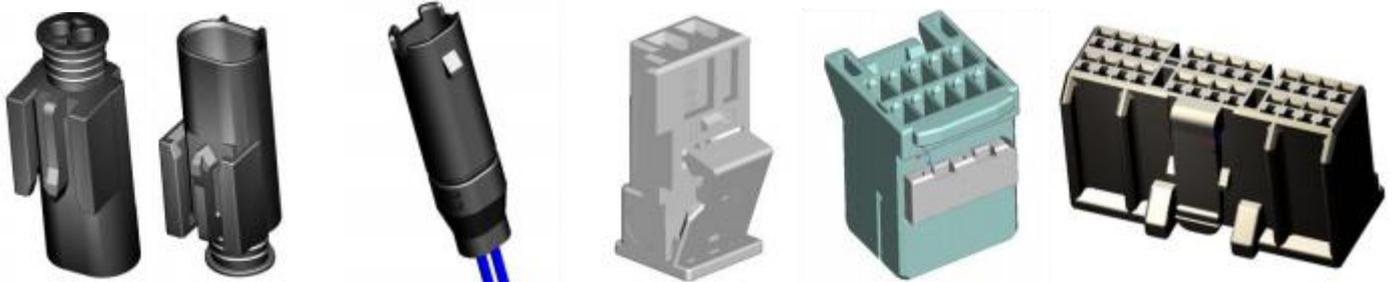

进口号	1-967570-3	进口号		进口号	1718333-1	进口号		进口号	353107-2
型号	0102-396	型号	0102-387	型号	0202-372	型号	0210-423GY	型号	0224-419BK



进口号	MG623341	进口号	1-967627-1	进口号	1-967629-1	进口号	
型号	0123-376	型号	0112-392	型号	0118-393	型号	3378

产品目录清单




进口号	02R-JWPF	进口号	03R-JWPF	进口号	04R-JWPF	进口号	06R-JWPF	进口号	08R-JWPF
型号	0202-410NR	型号	0203-409NR	型号	0204-408NR	型号	0206-402NR	型号	0208-411NR



进口号	02T-JWPF	进口号	03T-JWPF	进口号	04T-JWPF	进口号	06T-JWPF	进口号	08T-JWPF
型号	0102-410NR	型号	0103-409NR	型号	0104-408NR	型号	0106-403NR	型号	0108-411NR

产品目录清单

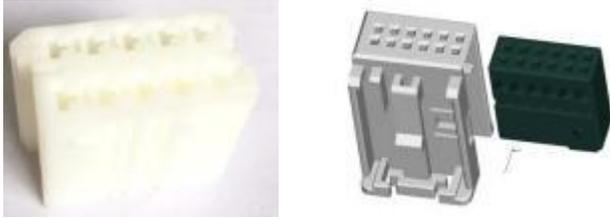


进口号		进口号					
型号	0210-098	型号	0212-066				



进口号		进口号		进口号		进口号	
型号	0116-234	型号	0216-234	型号	0105-133	型号	0205-133



进口号		进口号		进口号	
型号		型号		型号	



进口号	MX34012SF1	进口号	MX34016SF1	进口号	MX34020SF1	进口号	MX34024SF1
型号	0212-446GY	型号	0216-445GY	型号	0220-444GY	型号	0224-436GY



进口号	MX84B012SF1	进口号	MX84B016SF1	进口号	MX84B020SF1	进口号	MX84B024SF1
型号	0212-446BK	型号	0216-445BK	型号	0220-444BK	型号	0224-436BK

Contact: Mandy

Email number:

lqm849538848@gmail.com